
# **ZURN.** Carrier Feet Systems


0  $\bigcirc$ 

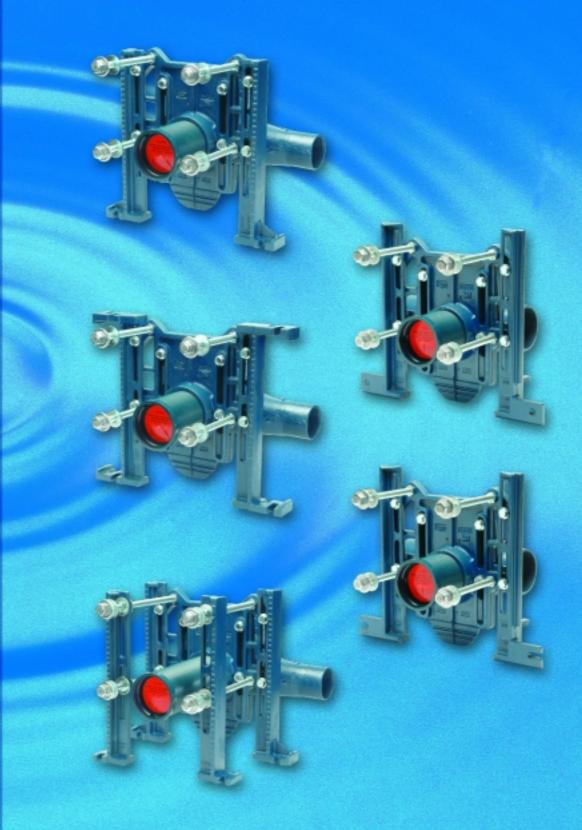


www.zurn.com

# **Standard Foot**


Part Number 54236-007-1

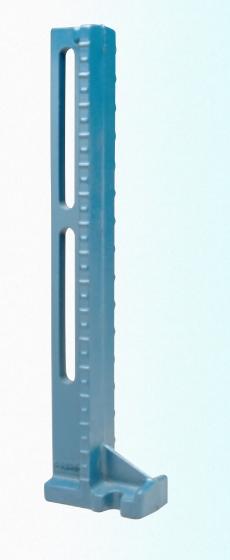

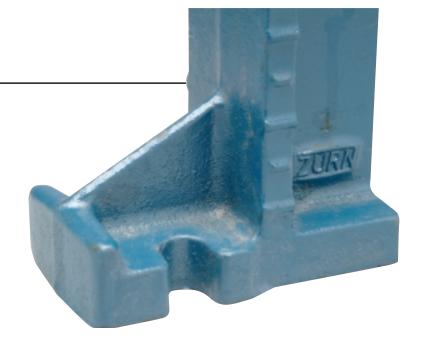

- Provided as standard on all Z1203, Z1204, Z1207, Z1208, and Z1209 water closet carrier systems.
- Interchangeable Design allows for foot to be mounted on either the right or left side of the faceplate, while providing a rear slot to anchor the carrier assembly to the floor.
- Scale markings are provided in 1/2 inch increments to help gage position of rough-in height.



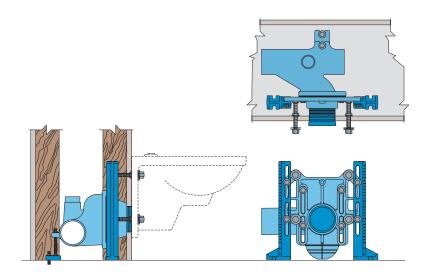


#### -M Foot


Part Number 54236-008-1





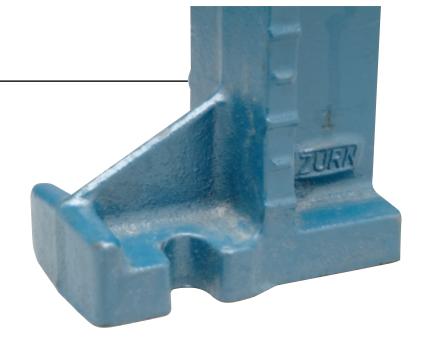

- Used as an auxiliary foot support on carrier systems positioned 10 to 18 inches behind the finished wall.
- Similar to Universal Foot, but with slots opened up to 11/16" width to accept the fixture support studs.
- Interchangeable Design allows for foot to be mounted on either the right or left side of the faceplate, while providing a rear slot to anchor the carrier assembly to the floor.
- Scale markings are provided in 1/2 inch increments to help gage position of rough-in height.

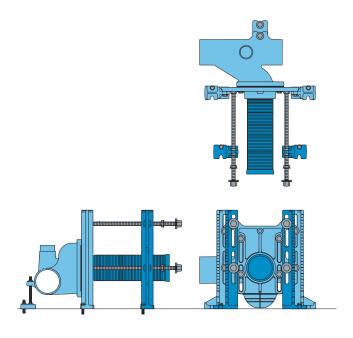


### **Pre-Fab Foot**

Part Numbers 60214-001-1 (Right) and 60214-002-1 (Left)





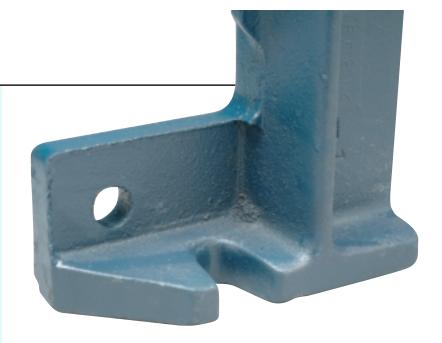


- Designed with mounting holes to allow a carrier to be pre-assembled in a battery run to steel angle prior to installation.
- The battery can be pre-assembled, with each carrier spaced apart and adjusted to the required height before reaching the job site, saving time and labor expenses. The assembly is then anchored in place with minimal adjustments necessary.




# **Pre-Fab Slotted Foot**

Part Numbers 60214-003-1 (Right) and 60214-004-1 (Left)

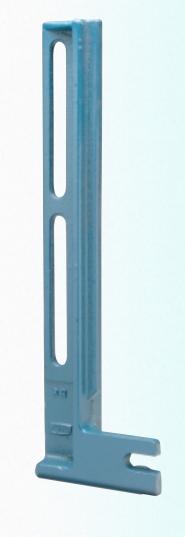



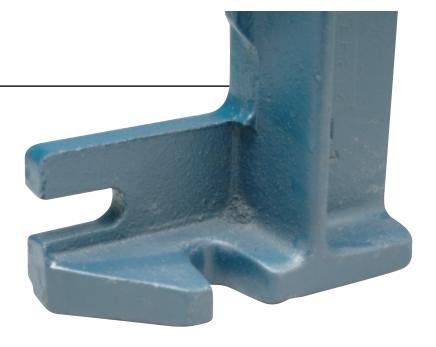



- Similar to the Pre-Fab Foot except provided with rear slots to mount to steel angle.
- Allows for the carrier system to be slightly shifted left or right along the angle prior to being anchored.



# **RYK Foot**


Part Number 57491-001-1

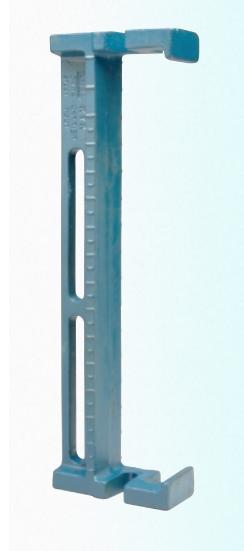

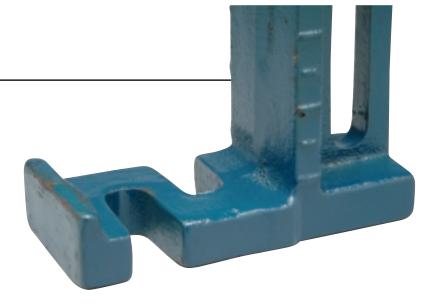

- Designed with top and bottom mounting holes to allow a carrier to be pre-assembled in a battery run to Unistrut metal framing prior to installation.
- Interchangeable Design allows for foot to be mounted on either the right or left side of the faceplate.



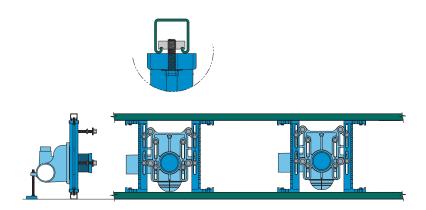

#### **Contractor Pre-Fab Pack**

Standard Trim for Closet Carriers



Twenty-five set gaylord bulk pack consisting of pre-assembled faceplate and feet, bulk box of fitting gaskets, bulk box of hardware bag #082, and bulk box of hardware bag #115.

Hardware Bag #082 – O-ring seal, gasket kit, stud protectors and finish trim. Hardware Bag #115 – Anchor foot assembly and mounting hardware.

Contractor Packs can be custom assembled and packaged to include the following:


- Pre-fab feet with mounting holes
- Pre-fab feet with mounting slots
- RYK Pre-fab feet for installation with Unistrut metal framing
- Faceplate studs of various required lengths (bulk box of 25 sets).




# **Trim Pack**

Standard Trim for Closet Carriers





Trim Packs can be custom assembled and packaged to include the following:




- Pre-fab feet with mounting slots
- RYK Pre-fab feet for installation with Unistrut metal framing
- Faceplate studs of various required lengths (four loose in box).





#### **Z1222-CB Carrier Bank**

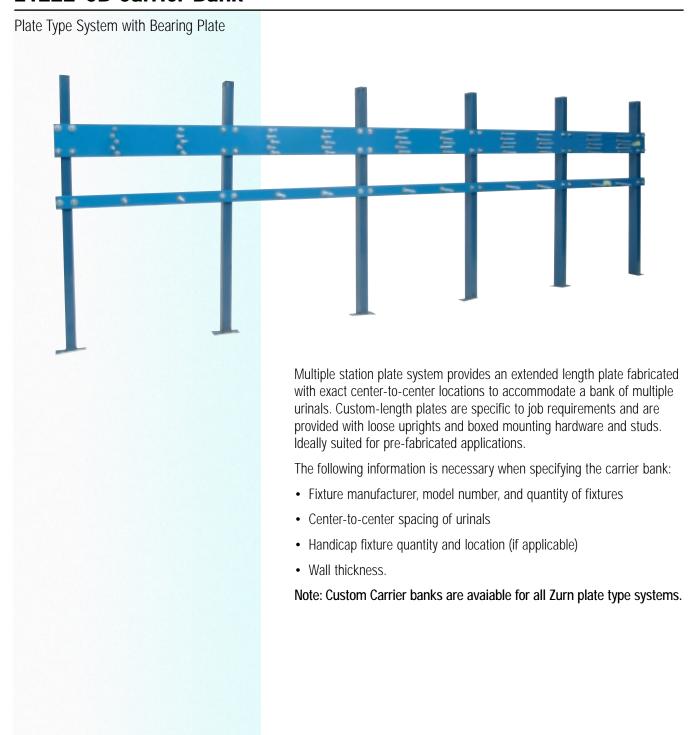

#### **Z1231-CB Carrier Bank**





Multiple station plate system provides an extended length plate fabricated with exact center-to-center locations to accommodate a bank of multiple lavatories. Custom-length plates are specific to job requirements and are provided with welded steel sleeves. Uprights and arms are provided loose with boxed mounting hardware. Ideally suited for pre-fabricated applications.

The following information is necessary when specifying the carrier bank:

- Fixture manufacturer, model number, and quantity of fixtures
- Center-to-center spacing of lavatories
- Handicap fixture quantity and location (if applicable)
- Wall thickness.

Note: Custom Carrier banks are avaiable for all Zurn plate type systems.

# Carrier Systems

**Assembled Units** 

Concealed Arm System
Carrier bank pre-fabricated
with drainage piping.



 Pre-fabrictaed water closet carrier bank with supply piping and finishing frames.







# **Carrier Systems**

Assembled Units







• Pre-fabricated carrier systems provide job site versatility.

• Four-staion plate type system carrier bamk pre-fabrictaed with drainage piping.

• Concealed arm system carrier bank installed.



ZURN PLUMBING PRODUCTS GROUP SPECIFICATION DRAINAGE OPERATION 1801 PITTSBURGH AVENUE ERIE, PA, U.S.A. 16502 PHONE: 814/455-0921 FAX: 814/454-7929 WEBSITE: www.zurn.com

Form No. SD32, 2/06