


P6000-HW6

7.6 VDC Hardwired Power Converter for Flush Valves and Faucets

(This UL Listed model replaces former UL Recognized unit)

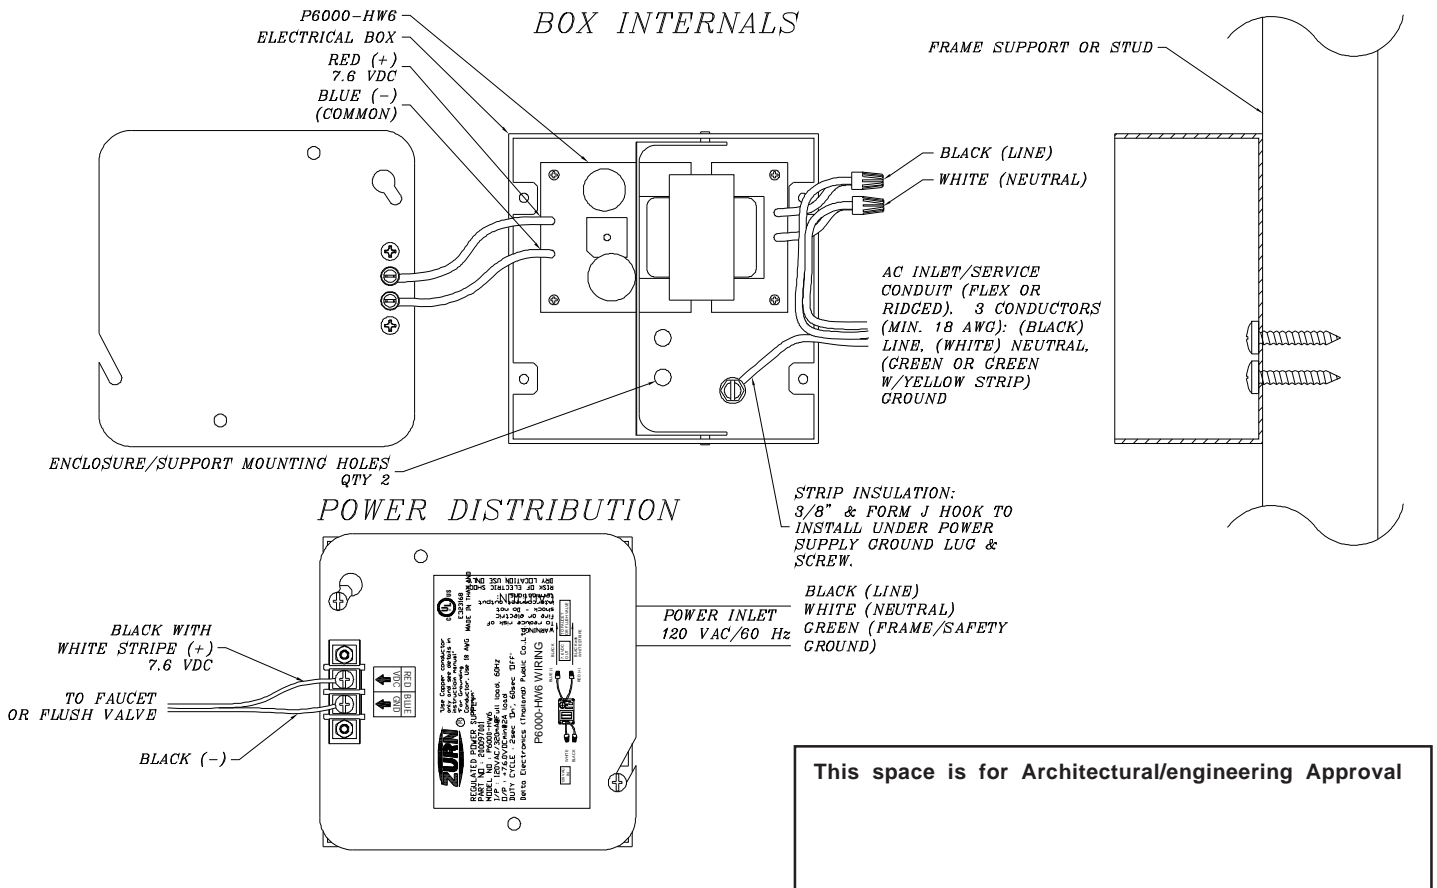

ENGINEERING SPECIFICATION: ZURN P6000-HW6 Power Converter - The Hardwired Power Converter is a 7.6 VDC regulated, 2.0A power supply that will operate up to: (8) ZEMS Sensors/Actuators, (8) ZESS Sensors/Solenoids, (8) 6VDC sensor faucets, or (8) Pint Urinal valves. The P6000-HW6 shown above is integrated into a 4-11/16" x 4-11/16" electrical box. The 120VAC input connections are terminated within the 4-11/16" square electrical box. The 7.6 VDC output terminals are externally mounted to the cover plate.

Notes:

1. Current P6000-HW6 product (indicated in photo) part number 200097001 replaces discontinued part number 81022001 and installation methods differ.
2. New configuration product, as shown, is shipped integrated within a 4-11/16" x 2-1/8" enclosure.
3. Mounting hardware (AC inlet conduit/cable clamp and enclosure-frame mounting screws) are NOT provided.
4. Low voltage output terminals are now external to the enclosure.

Typical Rough-In: 120 VAC is routed in conduit to the P6900-HW6 and the AC inlet connections are terminated within the assembly. The low voltage DC output connections are terminated externally and depending upon the installation area, appropriate cable/conductor insulation must be selected to meet local codes (conduit not required for the low voltage output conductor paths).

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292