

7600 Showermaster® 76-6A


1/2" inlets & outlet

CONCEALED PIPING



7600 Thermostatic Showermaster®

- Tub/shower installation
- Copper encapsulated thermostat assembly with brass shuttle, compensates for temperature fluctuations induced by water temperature and pressure changes
- Built-in shutoff for single handle operation
- Cast wall flange and lever handle, polished chrome plated.
- Maximum operating pressure: 125 PSI (860 KPA)
- Adjustable high temperature limit stop set for 110°F (43°C)
- Dial, Off through Hot, with directional indicators
- 1/2" inlets and outlet
- H-06 Institutional Shower head (2.5GPM, 9.5 l/min)

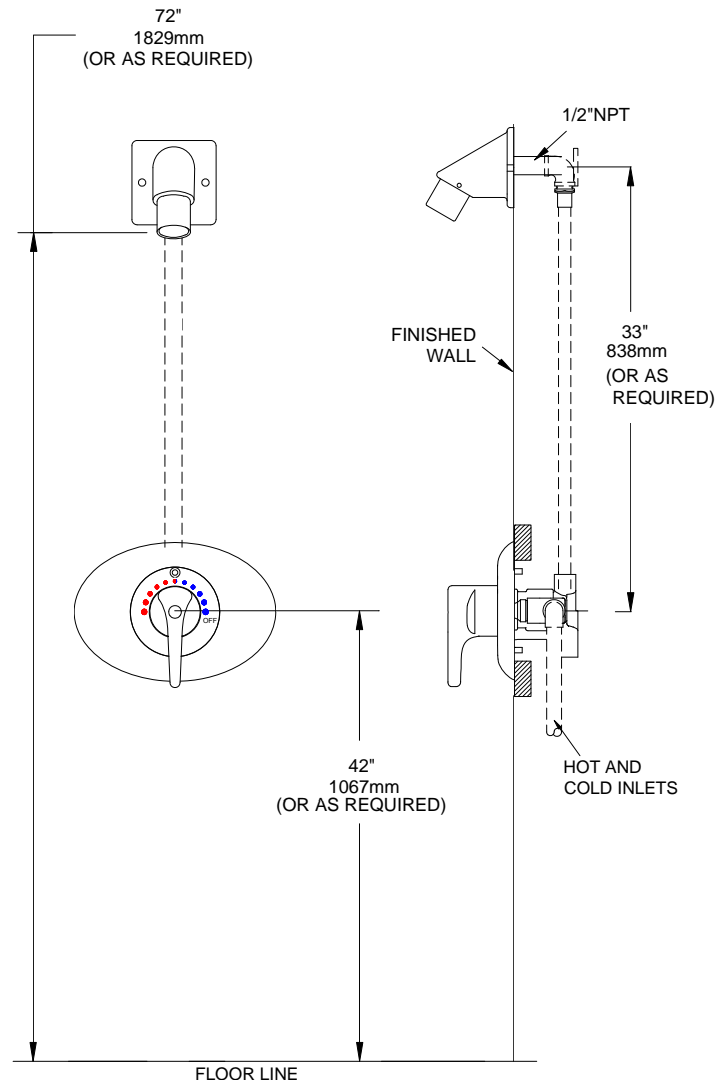

VALVE IS ASSE 1016 T/P LISTED
VALVE IS CUPC LISTED



Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

Note: All piping and fittings not furnished by manufacturer.

| | |
|----------------------------|------------------|
| Engineer's Approval | Job # _____ |
| | Arch/Eng. _____ |
| | Contractor _____ |



1360 Elmwood Avenue, Cranston, RI 02910 USA
Phone: 401.461.1200 Fax: 401.941.5310
Email: info@leonardvalve.com
Web Site: <http://www.leonardvalve.com>