


INDUSTRY HOSE STATION

SW-75-E-HDHR-50HDH-N2

SW-75-E-HDHR-50HDH-N2

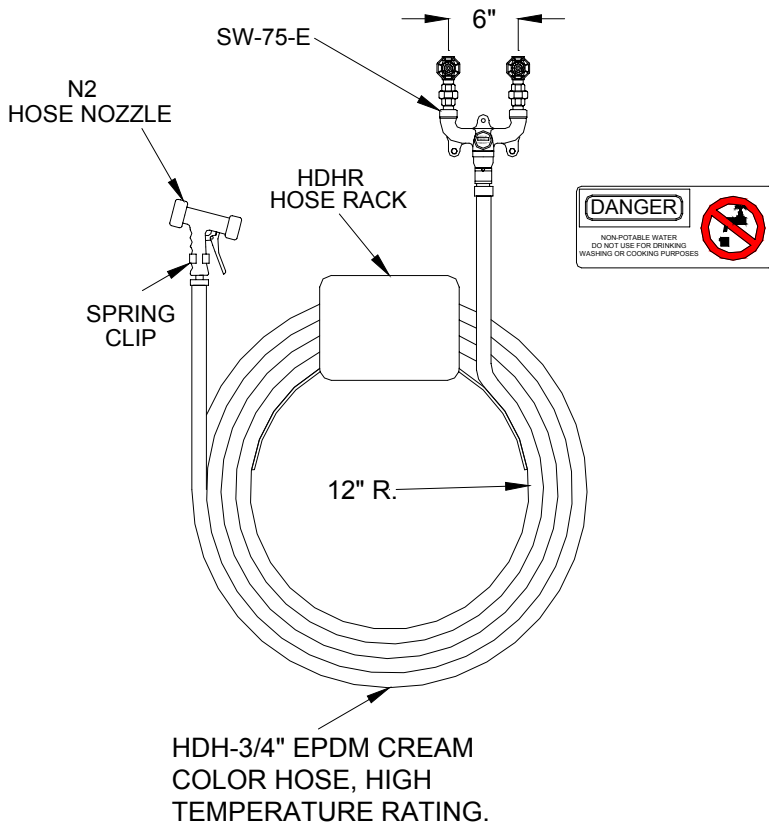

- Manual Steam & Water Blender
- 3/4" IPS Steam (or hot water) inlet, 3/4" IPS cold water inlet.
- Two stop and check valves with color-coded heat-resistant handles on inlets.
- Mixing chamber with steam jet.
- Hose connection.
- Rough finish.
- 80 PSI (5.5 bar) maximum operating steam pressure.
- 125 PSI (8.5 bar) maximum operating water pressure.

ACCESSORIES

- N2- Standard Hose Nozzle
- SC- Spring Clip.
- HDHR- Heavy Duty Hose Rack, welded construction, 1/4" saddle, 1/8" stainless steel face and backplate.
- 50 HDH- Heavy Duty Hose, fifty feet, 3/4" EDPM cream color cover, high temperature resistant.
- 180°F (82°C) @ 200PSI (13.7 Bar)
- 200°F (93°C) @ 50 PSI (3.4 Bar)
- OSHA approved safety sign.

OPTIONAL ACCESSORIES

- ___ N2-SS- Body and internal parts of stainless steel.
- ___ 75 HDH- Seventy five feet of heavy duty hose.
- ___ 100 HDH- One hundred feet of heavy duty hose
- ___ SP- Stainless Steel Spring protector, furnished on one end of hose.
- ___ SW- Bronze Swivel attachment on hose.

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

Job # _____ Arch/Eng. _____ Contractor _____	Engineer's Approval
---	--

IMPORTANT! Not for use with steam pressures above 80 PSI (5.5 bar). The prevailing steam (or hot water) pressure must be slightly lower than the cold water pressure.

CAUTION: These valves may pass live steam under certain circumstances. Follow recommended operating instructions and wear protective clothing when using. Adjustable limit stop set for 160°F at the factory.



1360 Elmwood Avenue, Cranston, RI 02910 USA

Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com

Web Site: <http://www.leonardvalve.com>