




# Z1732

## HEAVY-DUTY ADJUSTABLE FLOOR DRAIN

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

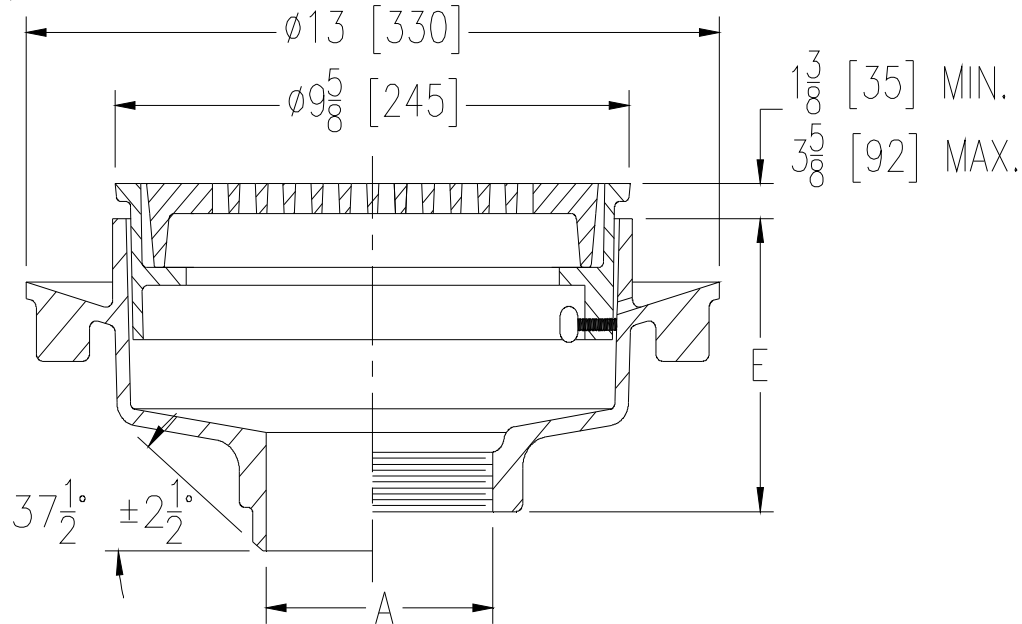

A- Pipe Size In.	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm <sup>2</sup> ]
2-3-4-6[51-76-102-152]	40 [18]	14 [90]

**ENGINEERING SPECIFICATION: ZURN Z1732**

All Type 304 (CF8) stainless steel heavy-duty adjustable floor drain with integral anchor flange, adjustable top frame and deep flange grate with plain finish.

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE**

2-3-4 [51-76-102]

6 [152]

3-4 [51-76]

2-3-4 [51-76-102]

6 [152]

2-3-4 [51-76-102]

6 [152]

(Specify size/type) **OUTLET**

- \_\_\_\_\_ BW Butt-weld (Specify Schedule 10, 40 or 80)
- \_\_\_\_\_ BW Butt-weld (Specify Schedule 10, 40 or 80)
- \_\_\_\_\_ IC Inside Caulk
- \_\_\_\_\_ NH No-Hub
- \_\_\_\_\_ NH No-Hub
- \_\_\_\_\_ IP Threaded
- \_\_\_\_\_ IP Threaded

**'E' BODY HT. DIM.**

6 [152]

6-3/8 [162]

6 [152]

6 [152]

6-3/8 [162]

6 [152]

6-3/8 [162]

**PREFIXES**

- \_\_\_\_\_ Z Type 304 (CF8) Stainless Steel Body\*
- \_\_\_\_\_ ZM Type 316 (CF8M) Stainless Steel Body

**SUFFIXES**

- \_\_\_\_\_ -D Dome Grate
- \_\_\_\_\_ -E Frame Extension Over 3 5/8 [92]
- \_\_\_\_\_ -K Seepage Holes Only
- \_\_\_\_\_ -KC Clamp Collar with Seepage Holes
- \_\_\_\_\_ -P 1/2 [13] Trap Primer Connection
- \_\_\_\_\_ -SC Solid Secured Cover
- \_\_\_\_\_ -SF Satin Finish Top
- \_\_\_\_\_ -TS Top Secured with Slotted Screws
- \_\_\_\_\_ -VP Vandal-Proof Secured Top
- \_\_\_\_\_ -Y Sediment Bucket
- \_\_\_\_\_ -30 Bronze Closure Plug
- \_\_\_\_\_ -31 Plastic Closure Plug
- \_\_\_\_\_ -33 Type 304 (CF8) Stainless Steel Closure Plug
- \_\_\_\_\_ -34 Bronze Closure Plug with 3/4 [19] Test Plug

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

<b>REV. H</b>	<b>DATE: 11/21/12</b>	<b>C.N. NO. 128497</b>
<b>DWG. NO. 59297</b>	<b>PRODUCT NO. Z1732</b>	