

LABORATORY FAUCET - SINGLE

Z825A1


TAG	



Engineering Specifications: Zurn AquaSpec® Z825A1

Polished chrome-plated single laboratory faucet with integral shank, quarter turn ceramic disc cartridge and a 3-1/2" [89mm] centerline rigid or swing gooseneck spout. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSIA112.18.1 Standard for flow), 2-1/2" [64mm] vandal-resistant color-coded metal lever handle, mounting hardware and a 1/2" NPSM coupling nut for standard lavatory riser.



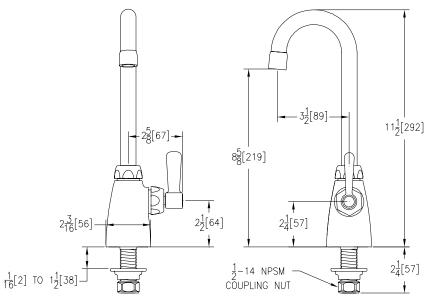

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

Suffix	Description
AR	Anti-Rotation Pins
FC	2.0 GPM [7.6 L] Laminar Flow Control in Base of Spout
G	1-1/4" [32mm] Grid Strainer Drain
HCT	Hot/Cold Text Indexes
PT	1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend
2F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator
3F	0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Aerator
4F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow
5F	2.0 GPM [7.6 L] Female Spray Outlet
6F	Female Serrated Nozzle Outlet
7F	1.0 GPM [3.8 L] Pressure Compensating Female Spray Outlet
16F	1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Female Spray Outlet
17F	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Female Aerator
-18F	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Female Laminar Flow

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com