

Location: _____




F1100-C-FC

FLOOR DRAIN WITH SURFACE MEMBRANE CLAMP FOR MEMBRANE FLOOR AREAS

Specification: MIFAB Series F1100-C-FC(-)-1 lacquered cast iron floor drain with anchor flange, cast iron membrane clamp ring with primary and secondary weepholes for waterproofing membrane, and "FC" (specify diameter) round, reinforced satin finished nickel bronze strainer with surface membrane clamp and vandal resistant, allen key screws. (For non-membrane floors, use MIFAB F1100-FC Series.)

Function: Used in showers, kitchens, restrooms, and other areas where a surface membrane is required. Round, adjustable, strainer is used for all types of poured finished floors. Membrane clamp is provided on body to secure waterproofing membrane on body.

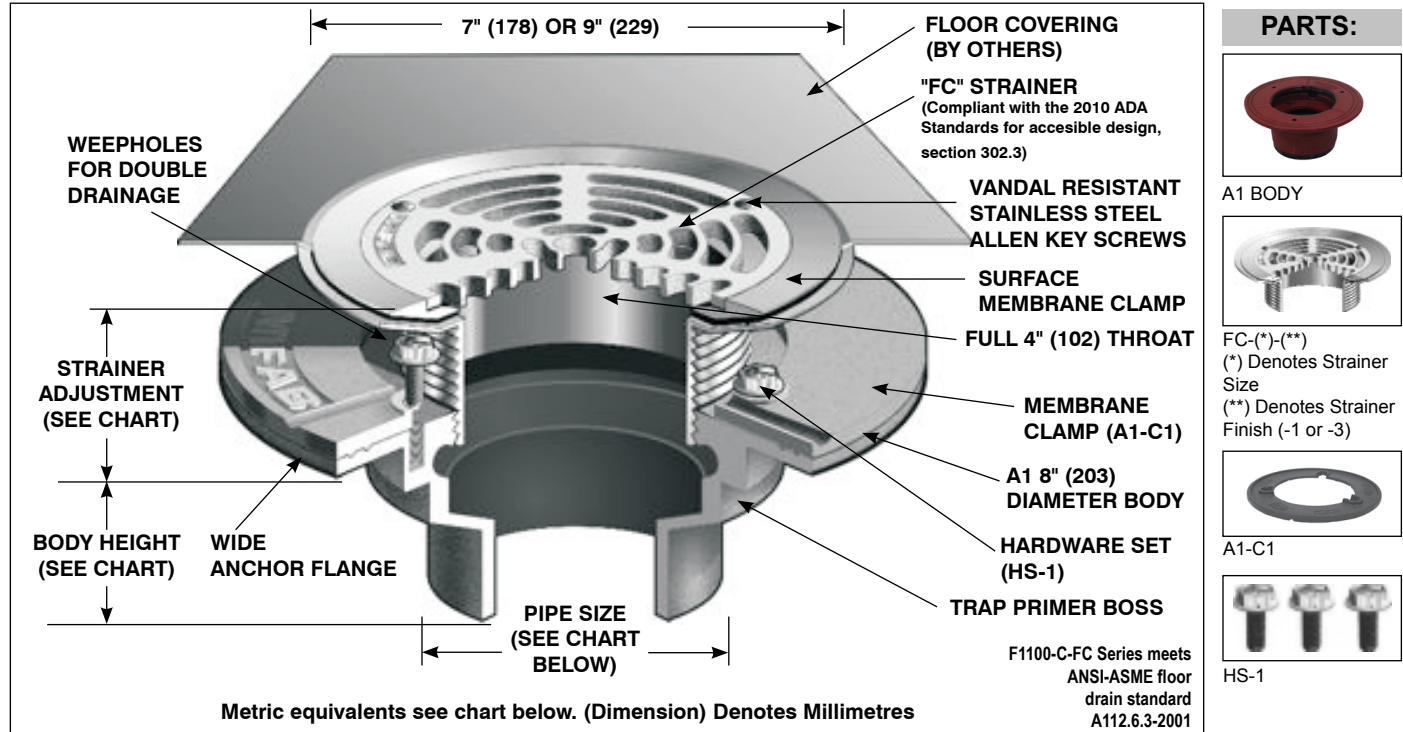

STRAINER SIZE	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
	MIN	MAX	FREE AREA	LOAD RATING		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
7" (178)	1 1/8" (28)	1 7/8" (48)	9 in ² (5800 ²)	UP TO 2,000 LBS.	2" (51) 3" (76)	3" (76) 3" (76)	3 3/8" (86) 3 3/8" (86)	2 1/4" (57) 2 5/8" (67)	3 3/4" (95) 3 3/4" (95)	2 15/16" (75) 3 3/4" (95)
9" (229)	1 1/8" (28)	1 7/8" (48)	12 in ² (7700 ²)	UP TO 2,000 LBS.	4" (102) 5" (127) 6" (152)	3" (76) 3" (76) 3 1/4" (83)	3 3/8" (86) -- 6 1/2" (165)	2 5/8" (67) 2 5/8" (67) --	3 3/4" (95) 3 3/4" (95) --	3 3/4" (95) -- --

SUFFIX OPTIONAL VARIATIONS

- 1 Nickel bronze strainer
- 3 Stainless steel strainer
- 5 Sediment bucket
- 6 Security screws (T-20 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 13 Galvanized body
- 15 Extension
- 21 Secondary flat stainless steel strainer (2", 3", 4")
- 28 Stainless steel body (Type 304)

SUFFIX OPTIONAL VARIATIONS

- 30 PVC socket connection body
- 31 ABS socket connection body
- 34 Closure plug
- 40 Underdeck clamp
- 41 Sump receiver
- 90 Threaded side outlet (2", 3", 4") (cast iron only)
- 90NH No hub side outlet (2", 3", 4") (cast iron only)
- 95 Client logo
- BA Buy American Act compliant product

SUFFIX OPTIONAL VARIATIONS

- C2 High rough-in membrane clamp (min. 1 9/16" (40))
- (Standard) No hub outlet
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4")
- X Inside caulk outlet
- Z Extended wide elastomeric flange

Job Name: _____

Section No: _____

Schedule No: _____

Page No: _____

Contract: _____

Purchase Order No: _____