

Location: _____




F1100-RS

**FLOOR DRAIN WITH RECTANGULAR
STRAINER FOR NON-MEMBRANE FLOOR AREAS**

Specification: MIFAB Series F1100-RS lacquered cast iron floor drain with anchor flange, weepholes, and "RS" (specify size) rectangular (specify material finish) strainer. (For membrane floors, use MIFAB F1100-C-RS Series.) Please note 5"x17" sized strainer available in stainless steel only. For RS48, grate style is different compared to larger model.


Function: Used in showers, gutters and other non-membrane finished areas where a large grate free area is required and limited width is available.

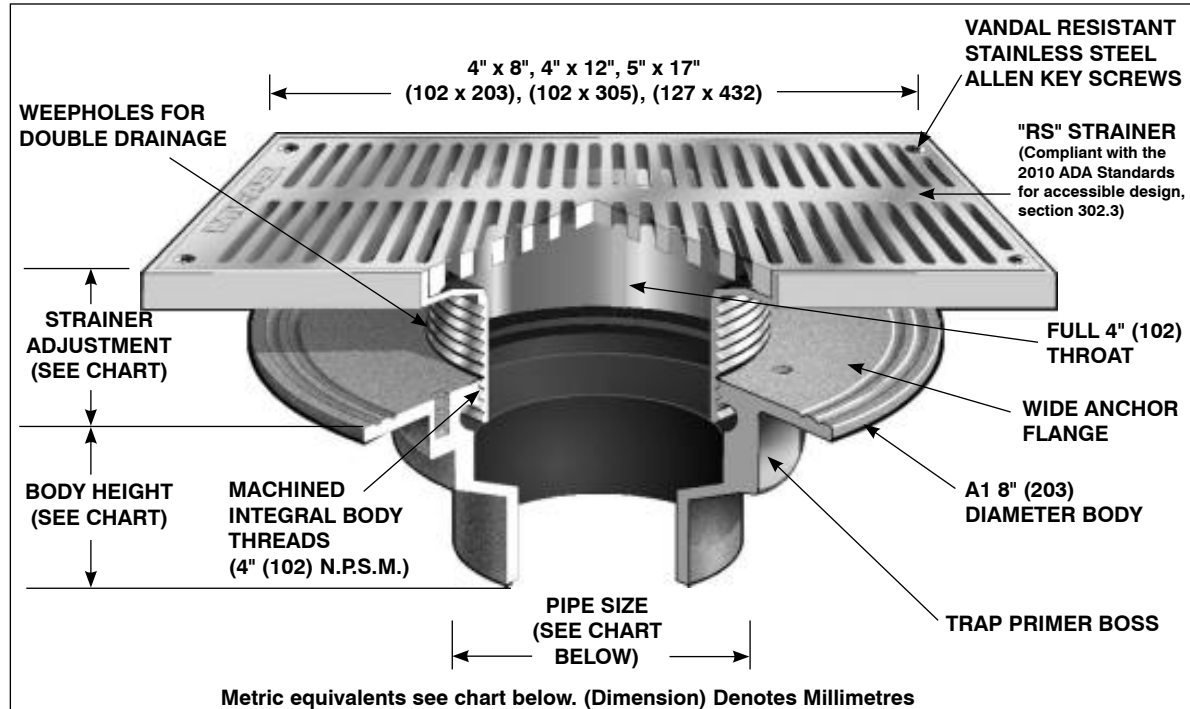

PARTS:



A1 BODY



RS48

RS(*)-(**)
(*) Denotes Strainer Size (4"x8", 4"x12", or 5"x17")
(**) Denotes Strainer Finish (-1 or -3)
(-3 only for 5" x 17")

F1100-RS Series meets
ANSI-ASME floor
drain standard
A112.6.3-2001

STRAINER SIZE	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
			FREE AREA	LOAD RATING N.B. (-1) / S.S. (-3)		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
	MIN	MAX								
4" x 8" (102 x 203)	1 1/2" (38)	2 5/8" (66)	11.0 in ² (7096 ²)	5000 to 7499 LBS.	2" (51) 3" (76)	3" (76) 3" (76)	3 3/8" (86) 3 3/8" (86)	2 1/4" (57) 2 5/8" (67)	3 3/4" (95) 3 3/4" (95)	2 15/16" (75) 3 3/4" (95)
4" x 12" (102 x 305)	1 1/2" (38)	2 5/8" (66)	15 in ² (9677 ²)	5000 to 7499 LBS.	4" (102) 5" (127)	3" (76) 3" (76)	3 3/8" (86) --	2 5/8" (67) 2 5/8" (67)	3 3/4" (95) 3 3/4" (95)	3 3/4" (95) --
5" x 17" (127 x 432)	1 1/2" (38)	2 5/8" (66)	18 in ² (11610 ²)	5000 to 7499 LBS.	6" (152)	3 1/4" (83)	6 1/2" (165)	--	--	--

SUFFIX OPTIONAL VARIATIONS

- 1 Nickel bronze strainer
- 3 Stainless steel strainer
- 5 Sediment bucket
- 6 Security screws (T-20 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 13 Galvanized body
- 15 Extension
- 21 Secondary flat stainless steel strainer (2", 3", 4")
- 28 Stainless steel body (Type 304)
- 30 PVC socket connection body

SUFFIX OPTIONAL VARIATIONS

- 31 ABS socket connection body
- 34 Closure plug
- 40 Underdeck clamp
- 41 Sump receiver
- 90 Threaded side outlet (2", 3", 4") (cast iron only)
- 90NH No hub side outlet (2", 3", 4") (cast iron only)
- 95 Client logo
- BA Buy American Act compliant product
- C Membrane clamp for low rough-in (min. 1/2" (13))

SUFFIX OPTIONAL VARIATIONS

- C2 High rough-in membrane clamp (min. 1 9/16" (40))
- F4 4" Round funnel
- F6 6" Round funnel
- (Standard) No hub outlet
- G Oval 4" x 9" funnel
- J 6" x 3" x 1" funnel
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4")
- X Inside caulk outlet
- Z Extended wide elastomeric flange

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contract: _____
Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice or obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880