


## FLOOR DRAIN FOR NON-MEMBRANE FLOOR AREAS

**Specification:** MIFAB Series F1220 lacquered cast iron floor drain with standard (specify material finish) strainer and vandal resistant allen key screws.

**Function:** Used in showers, kitchens, restrooms and other non-membrane finished areas. Round, adjustable strainer is used with all types of poured finished floors. Narrow diameter body is ideal for tenant improvement projects where core drilling is required to allow placement of floor drains.

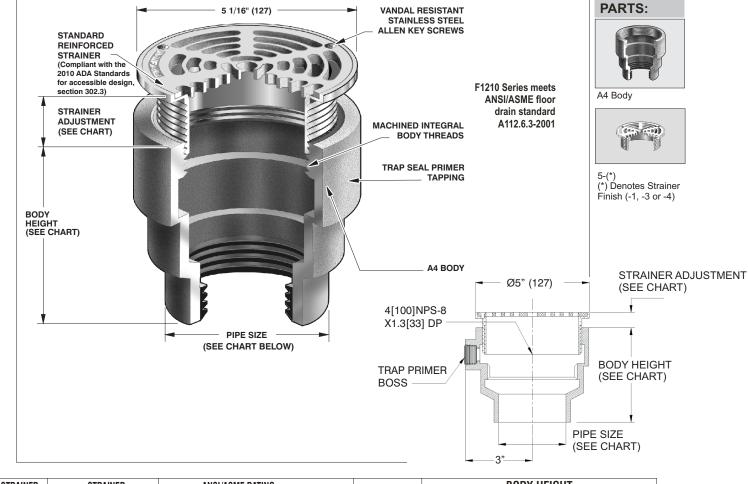

STRAINER	STRAINER	ANSI/ASME RATING				PIPE		BODY HEIGHT			
DIAMETER	ADJUSTMENT Min Max	FREE AREA LOAD		D RATING S.S. (-3) D.I. (-4)		SIZE	NO HUB (Standar		PVC/ABS (-30)/(-31)	_	
j" (127)	3/4" (19) 2 1/16" (52)	8 in <sup>2</sup>	UP TO	5000-7499		2" (51)	``	4 3/8" (111)	4 3/8" (111)	-	
()		(5200 <sup>2</sup> )	2,000 LBS.		LBS.	3" (76	. ,	4 3/8" (111)	4 3/8" (111)		
		( )				4" (102	. ,	4 3/8" (111)	4 3/8" (111)		
SUFFIX	OPTIONAL VARIAT	IONS:		SUFFIX	[			SUFFIX			
-1	Nickel bronze strainer			-30		PVC socket connection body			Oval 4" x 9" funnel Heel proof grate (1/4" maxim		
-2	Polished brass strainer (5" only)			-31		ABS socket connection body			ricci piool giad	The proof grate (1/4 Thakin	
-	-3 Stainless steel strainer			-34 Closure plug					grate opening s	grate opening size, -3 only)	
-4	Ductile iron strainer			-49	Chrome	Chrome Plated Strainer			6" x 3" x 1" funr	6" x 3" x 1" funnel	
-5	<ul> <li>-6 Security screws (T-20 Torx &amp; pin)</li> <li>-7 ½" trap seal primer connection</li> <li>-8 Backwater valve (2",3",4")</li> <li>-11 Acid resistant epoxy coated body</li> <li>-13 Galvanized body</li> </ul>			-50	-50 Lacquered cast iron funnel -95 Client logo			(Standard	d) No hub side outlet		
				-95				Р	Push on outlet	Push on outlet	
				-C1	I Clamp I	ring for low rough-in					
-						(min. 1/2" (13))					
-11				-F4	-F4 4" Round funnel						
				-Fe		nd funnel					
-					e nour						
-15	Extension										
Job N	Name:					Page N	0:				
Secti	on No:										
Schedule No:						Purcha	se Order No: _				
MIFAB reser	rves the right to make changes in r	naterial and desi	gn without fori	nal notice and	obligation.		USA: 1-800-465-2	2736 www.mifab.c	om CAN: 1-800-38	7-3880	