

Location: _____




F1580

24" x 24" HEAVY DUTY DEEP SUMP DRAIN WITH BOTTOM OUTLET

Specification: MIFAB Series F1580 powder epoxy coated deep sump drain with secondary dome strainer, bottom outlet and extra heavy duty 24" x 24" (610 x 610) two section ductile iron grates with a free area of 200 square inches (129,032²). Grates to have maximum 13/16" (21) openings.

Function: Used in industrial factories, mechanical rooms, parking garages and other membrane finished areas. 24" x 24" tractor grate is used with all types of poured finished floors.

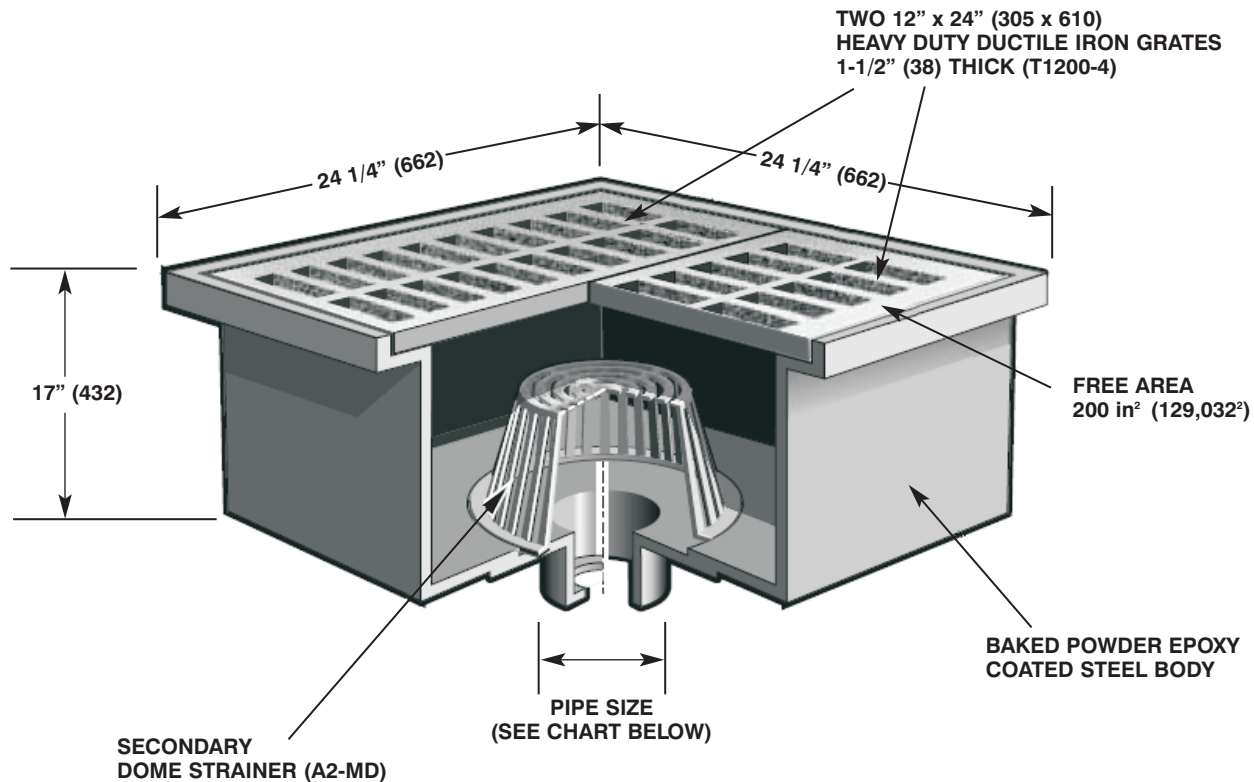

Metric equivalents see chart below. (Dimension) Denotes Millimetres

F1580 Series meets
ANSI/ASME floor
drain standard
A112.6.3-2001

MODEL NO.	NO HUB PIPE SIZE
F1580-A	2" (51)
F1580-B	3" (76)
F1580-C	4" (102)
F1580-D	6" (152)
F1580-E	

SUFFIX OPTIONAL VARIATIONS:

- 3 Stainless steel veneer top assembly
- 4 Ductile iron grates
- 6 Security screws (TR30 Torx & pin)
- 8 Backwater valve (2", 3", 4")
- 12 Galvanized top assembly
- 13 Galvanized body
- 28 Stainless steel body (Type 304)

SUFFIX

- ARRA ARRA (Stimulus Act) compliant product
- BA Buy American Act compliant product
- FL Anchor flange
- FLC Anchor flange and membrane clamp
- PA Pennsylvania Steel Act compliant product
- (Specify) Special outlet size

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contractor: _____
Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880