


LARGE PLANTING AREA DRAIN WITH 8" HIGH PERFORATED STANDPIPE AND DOME

Specification: MIFAB Series F1830-PL lacquered cast iron standpipe type planting area drain with anchor flange, cast iron membrane clamp ring with primary and secondary weepholes for waterproofing membrane, and adjustable 4" (102) diameter ABS perforated standpipe and stainless steel secured dome.

Function: Used in areas such as flower boxes and others where the drain is buried underground. Perforated standpipe allows for sub surface drainage of water. The stainless steel dome secured to the top of the standpipe is set at ground level and permits the drainage of excess surface water. Membrane clamp is provided to secure the waterproof fing membrane.

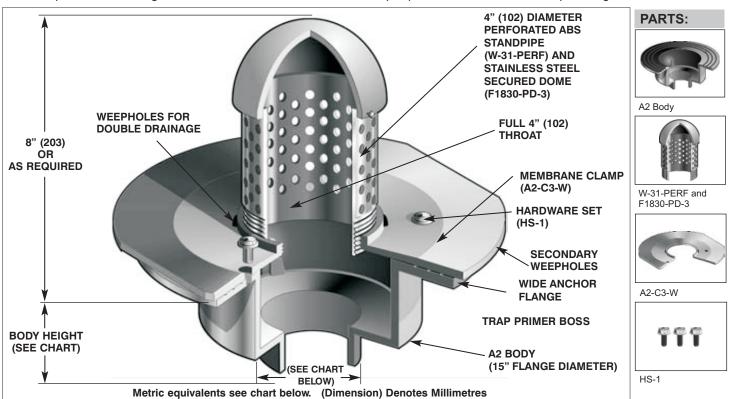

| PIPE | BODY HEIGHT | | | | |
|----------|----------------------|----------------|-----------------|---------------------|------------------------|
| SIZE | NO HUB (STANDARD) | PUSH On (P) | THREADED (T) | INSIDE Caulk (X) | PVC/ABS (-30)/(-31) |
| 2" (51) | 6" (152) | 6 1/8" (156) | 5 7/16" (138) | 6 1/4" (159) | 7 1/8" (181) |
| 3" (76) | 6" (152) | 6 1/8" (156) | 5 7/16" (138) | 6 1/4" (159) | 7 3/8" (187) |
| 4" (102) | 6" (152) | 6 1/8" (156) | 5 7/16" (138) | 6 1/4" (159) | 7 3/8" (187) |
| 5" (127) | 6" (152) | _ | 5 7/16" (138) | 6 1/4" (159) | _ |
| 6" (152) | 7 1/4" (184) | 7" (178) | 7" (178) | 6 1/4" (159) | _ |

F1830-PL Series meets ANSI/ASME floor drain standard A112.6.3-2001

| SUFFIX | OPTIONAL VARIATIONS: | SUFFIX | |
|--------|----------------------------------|------------|--|
| -11 | Acid resistant epoxy coated body | -90NH | No hub side outlet (2", 3", 4") (cast iron only) |
| -13 | Galvanized body | -92 | Stainless steel perforated |
| -28 | Stainless steel body (Type 304) | | stand pipe |
| -30 | PVC socket connection body | -ARRA | ARRA (Stimulus Act) |
| -31 | ABS socket connection body | | compliant product |
| -40 | Underdeck clamp | -BA | Buy American Act |
| -41 | Sump receiver | | compliant product |
| -43 | Solid standpipe | (Standard) | No hub outlet |
| -79 | Standpipe over 8", per inch | Р | Push on outlet |
| -90 | Threaded side outlet (2",3",4") | -PA | Pennsylvania Steel |
| 00 | (cast iron only) | | Act compliant product |
| | , | T | Threaded outlet (2",3",4") |
| | | Χ | Inside caulk outlet |

| Job Name: | Page No: |
|--------------|--------------------|
| Section No: | Contractor: |
| Schedule No: | Purchase Order No: |
| | |

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880