

Location: _____





HY-2000

**ENCASED NON-FREEZE
WALL HYDRANT**

Specification: MIFAB Series HY-2000 ____ (specify length) A.S.S.E. 1019-B certified exposed type, self draining, non freeze wall hydrant with A.S.S.E. 1011 approved anti-siphon and vandal resistant integral vacuum breaker with 3/4" (19) male hose connection. Hydrant assembly complete with neoprene plunger to control both the flow and drain functions, hardened bronze operating stem, drain port under the hexagon nut, heavy duty brass casing, 360 degree swivel inlet connection, heavy duty chrome plated bronze head casting, polished chrome plated face plate, and satin finished nickel bronze box with hinged locking cover. Operating key to be furnished with each hydrant.

Function: Designed to blend in with commercial applications such as office buildings, apartment complexes, malls and shopping centers, schools, churches and industrial buildings.

Overhead view

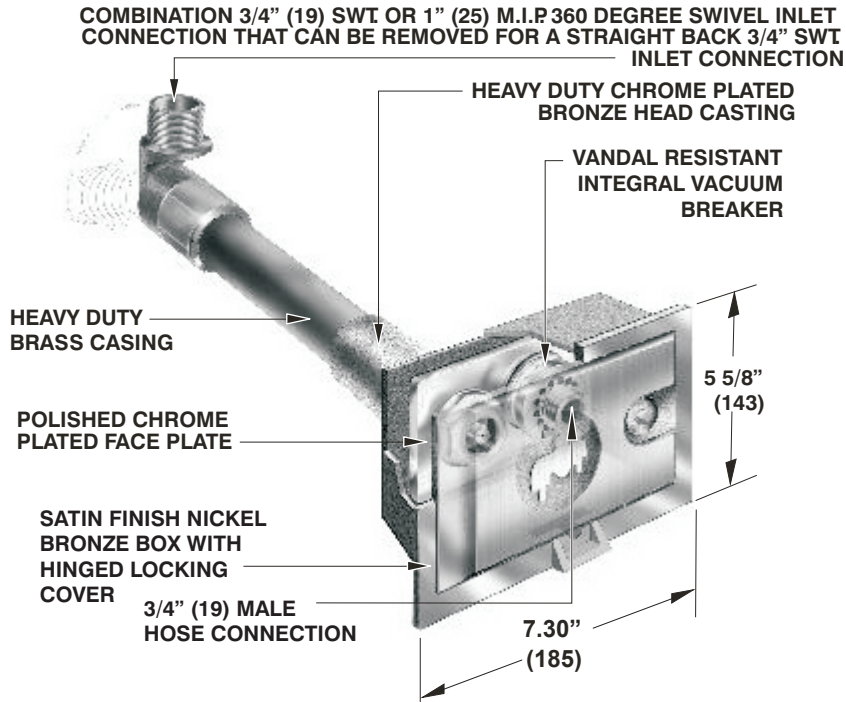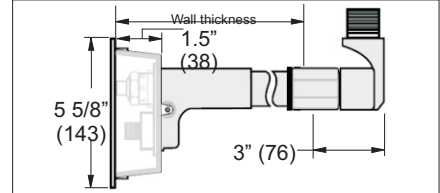

RECOMMENDED WALL OPENING 4 1/4" (108) X 6 1/4" (158)

MIFAB® HY-2000 Series Features

- **SWIVEL CONNECTION** - 360 degree combination 3/4" SWT. and 1" male threaded inlet connection. Swivel connection can be removed for 3/4" SWT. straight back inlet.
- **VACUUM BREAKER** - unique vandal resistant integral vacuum breaker protects owner from anti-siphon conditions. Self draining.
- **FACE PLATE** - polished chrome plated.
- **CASING** - heavy duty brass casing tube.
- **APPROVALS** - HY-2000 Series wall hydrant is tested and certified by C.S.A. to the A.S.S.E. Standard 1019-B. The anti-siphon vacuum breaker is tested and certified by C.S.A. to the A.S.S.E. Standard 1011.



(Dimension) Denotes Millimetres

MODEL NO.	WALL THICKNESS		OVERALL LENGTH		APPROXIMATE WEIGHT		SWIVEL INLET CONNECTION
	IN	MM	IN	MM	Lbs	Kg	
HY-2006	6	152	10	254	7.0	3.18	3/4" SWT., 1" Male IPS combination
HY-2008	8	203	12	305	7.5	3.41	3/4" SWT., 1" Male IPS combination
HY-2010	10	254	14	356	8.0	3.64	3/4" SWT., 1" Male IPS combination
HY-2012	12	305	16	406	8.5	3.86	3/4" SWT., 1" Male IPS combination
HY-2014	14	356	18	457	9.0	4.09	3/4" SWT., 1" Male IPS combination
HY-2016	16	406	20	508	9.5	4.32	3/4" SWT., 1" Male IPS combination
HY-2018	18	457	22	559	10.0	4.54	3/4" SWT., 1" Male IPS combination
HY-2020	20	508	24	610	10.5	4.77	3/4" SWT., 1" Male IPS combination
HY-2022	22	559	26	660	11.0	5.00	3/4" SWT., 1" Male IPS combination
HY-2024	24	610	28	711	11.5	5.22	3/4" SWT., 1" Male IPS combination

SUFFIX	OPTIONAL VARIATIONS:	SUFFIX		SUFFIX	
-0	1" (25) Hose connection	-52	A.S.S.E 1052 double check vacuum breaker. HY-1600 deep rough in Stainless Steel box required	-K	Cylinder key lock
-3	Cast stainless steel hydrant box			-RB	Fabricated stainless steel hydrant box with round back for tilt up construction
-49	Polished chrome plated nickel bronze box	-BA	Buy American Act compliant product	-S	Four 1" x 1/4" (25 x 6) slots on top and two sides of box to receive mounting brackets
				-WC	Wall clamp

Job Name: _____
 Section No: _____
 Schedule No: _____

Page No: _____
 Contractor: _____
 Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880