

Location: _____




MHY-30

**MODERATE CLIMATE
WALL HYDRANT**

Specification: MIFAB Series MHY-30 exposed type, self draining, moderate climate wall hydrant with A.S.S.E. 1011 certified anti-siphon and vandal resistant integral vacuum breaker with 3/4" (19) male hose connection. Hydrant assembly complete with one piece neoprene plunger to control the flow function, hardened bronze operating stem, heavy duty chrome plated bronze head casting and polished chrome plated face plate. Operating key to be furnished with each hydrant.


Function: Designed for commercial applications in moderate climate areas. Ideal for office buildings, apartment complexes, malls, shopping centers, schools, churches and industrial buildings.

Overhead view

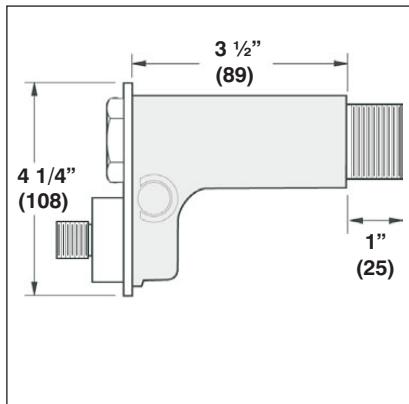

MIFAB® MHY-30 Series Features

- **INTERNAL COMPONENTS** - hardened bronze operating stem and neoprene plunger.
- **VACUUM BREAKER** - unique self draining vandal resistant integral vacuum breaker protects from anti-siphon conditions.
- **FACE PLATE** - polished chrome plated.
- **APPROVALS** - MHY30 Series wall hydrant is listed with I.A.F.M.O. and is manufactured with an anti-siphon vacuum breaker that is tested and certified to the A.S.S.E. Standard 1011.

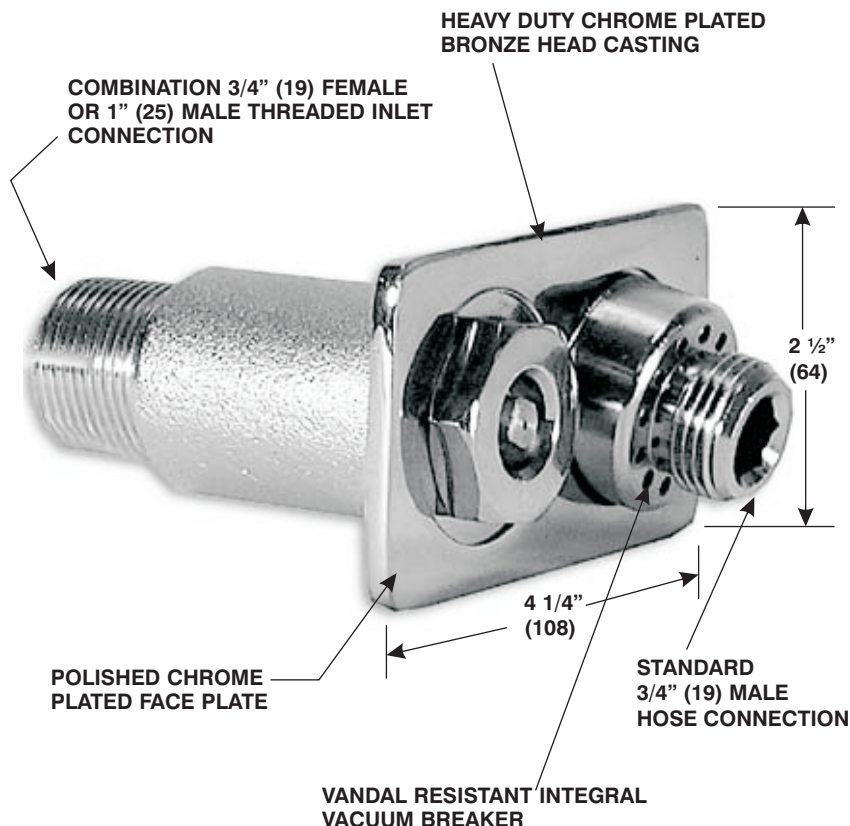

2" x 3 7/8" RECOMMENDED WALL OPENING

(DIMENSION) DENOTES MILLIMETRES

MODEL NO.	WALL THICKNESS	OVERALL LENGTH IN	OVERALL LENGTH MM	APPROXIMATE WEIGHT Lbs.	APPROXIMATE WEIGHT Kg.	INLET CONNECTION
MHY-30	3 1/2"	3 1/2"	114	2	0.9	3/4" Female, 1" Male IPS combination

SUFFIX -0
OPTIONAL VARIATIONS: 1" (25) Hose connection

(Dimension) Denotes Millimetres

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880