

Location: _____




MHY-40

**HOT AND COLD NON FREEZE
WALL HYDRANT**


Specification: MIFAB Series MHY-40 ____ A.S.S.E. 1019-B approved exposed type, self draining, non freeze hot and cold wall hydrant with A.S.S.E. 1011 approved anti-siphon integral vacuum breaker with 3/4" male hose connection. Hydrant assembly complete with hot and cold temperature control selection, one piece neoprene plunger to control the flow, hardened bronze operating stem, heavy duty brass casing, heavy duty chrome plated bronze head casing and chrome plated face plate. Loose tee key to be furnished with each hydrant.

Function: Designed for use in restaurants, food service areas and other facilities that require anti-contamination hot and cold potable water supply.

Plumbing and Drainage
Mechanical Section

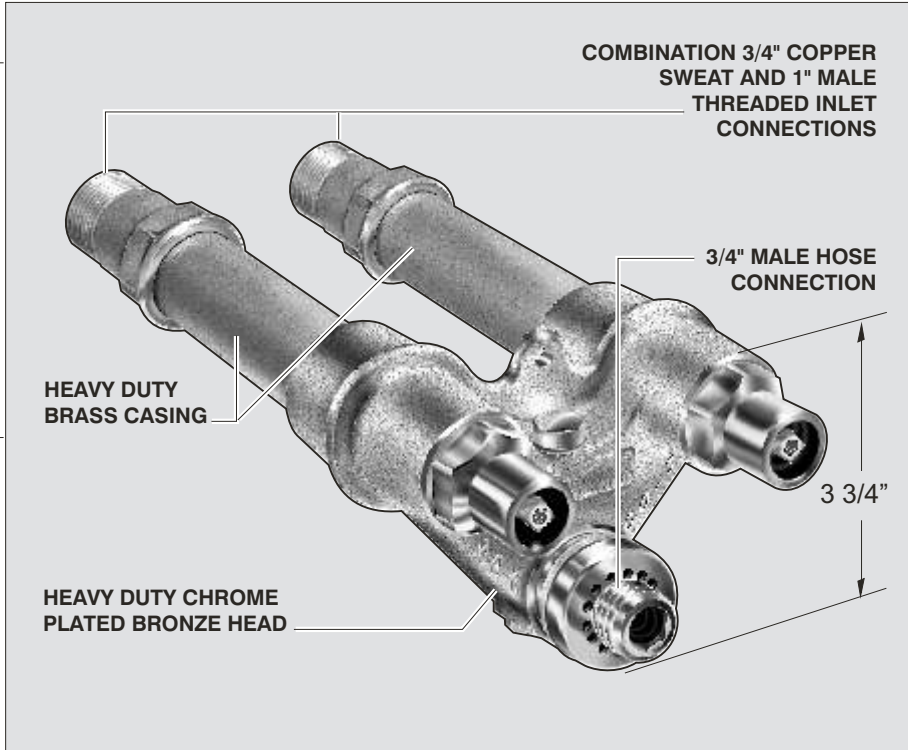

Overhead view

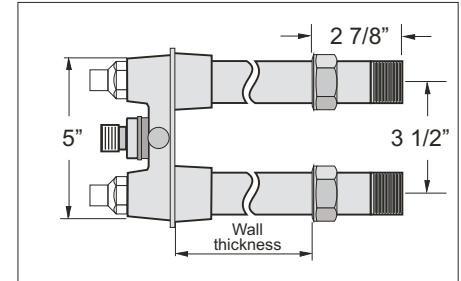

MIFAB®MHY-40 Series Features

- **Internal Components** - hardened bronze operating stem and one piece neoprene plunger.
- **Vacuum Breaker** - integral vacuum breaker protects owner from anti-siphon conditions. Self draining.
- **Face plate** - chrome plated.
- **Casing** - heavy duty brass.
- **Approvals** - MHY-40 Series wall hydrant is tested and certified to the A.S.S.E. Standard 1019-B and listed by I.A.P.M.O. The anti-siphon vacuum breaker is tested and certified to the A.S.S.E. Standard 1011 and listed by I.A.P.M.O.

MODEL NO.	WALL THICKNESS		OVERALL LENGTH		APPROXIMATE WEIGHT/Lbs.		INLET CONNECTION
	IN	MM	IN	MM	Lbs.	Kg.	
MHY-40-4	4	102	11	279	4	1.81	3/4" Female Sweat, 1" Male IPS combination
MHY-40-6	6	152	13	330	7.54	3.42	3/4" Female Sweat, 1" Male IPS combination
MHY-40-8	8	203	15	381	8.26	3.74	3/4" Female Sweat, 1" Male IPS combination
MHY-40-10	10	254	17	432	8.98	4.10	3/4" Female Sweat, 1" Male IPS combination
MHY-40-12	12	305	19	483	9.70	4.39	3/4" Female Sweat, 1" Male IPS combination
MHY-40-14	14	356	22	559	10.42	4.72	3/4" Female Sweat, 1" Male IPS combination
MHY-40-16	16	406	23	584	11.14	5.05	3/4" Female Sweat, 1" Male IPS combination
MHY-40-18	18	457	25	635	11.86	5.38	3/4" Female Sweat, 1" Male IPS combination
MHY-40-20	20	508	27	686	12.58	5.70	3/4" Female Sweat, 1" Male IPS combination
MHY-40-24	24	610	31	787	14.02	6.35	3/4" Female Sweat, 1" Male IPS combination

SUFFIX OPTIONAL VARIATIONS:

-0 1" (25) Hose connection

SUFFIX

-6 3/4" (19) I.P.S. 90 degree elbow and union nut
-WC Wall clamp

(Dimensions) Denotes Millimetres

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880