

AQUATROL® COMBINATIONS

4507


4500 AQUATROL® Pressure Actuated Mixer

- Durable stainless steel balancing piston to equalize hot and cold supply pressures.
- Built-in shutoff for single handle operation
- Removable one piece upper and lower valve seat
- Internal parts of bronze and stainless steel
- Cast wall flange and lever handle, polished chrome plated
- Maximum operating pressure: 125 PSIG (860KPA)
- Adjustable high temperature limit stop set for 110°F* (43°C)
- Color coded dial, Off through Hot, with directional indicators
- Angle checkstops, copper tube connection
- Plasterguard/thin wall mounting bracket included.
- D Diverter spout, 1/2" or 3/4" IPS
- 501P(G) 24" glide rail, 2.5 GPM (9.5 l/min) max flow rate
- Double check valve assembly

Valve is ASSE • 1016 Certified


Valve is CSA • B.125-05 Certified



OPTIONS:

- ___ SUFFIX 501P(G)-30 30" glide rail in place of 24" glide rail on 501P(G)
- ___ SUFFIX Less Invb. Less inline vacuum breaker on hand shower
- ___ SUFFIX RV Reinforced vinyl hose on hand shower
- ___ SUFFIX QD Quick disconnect on hand shower

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

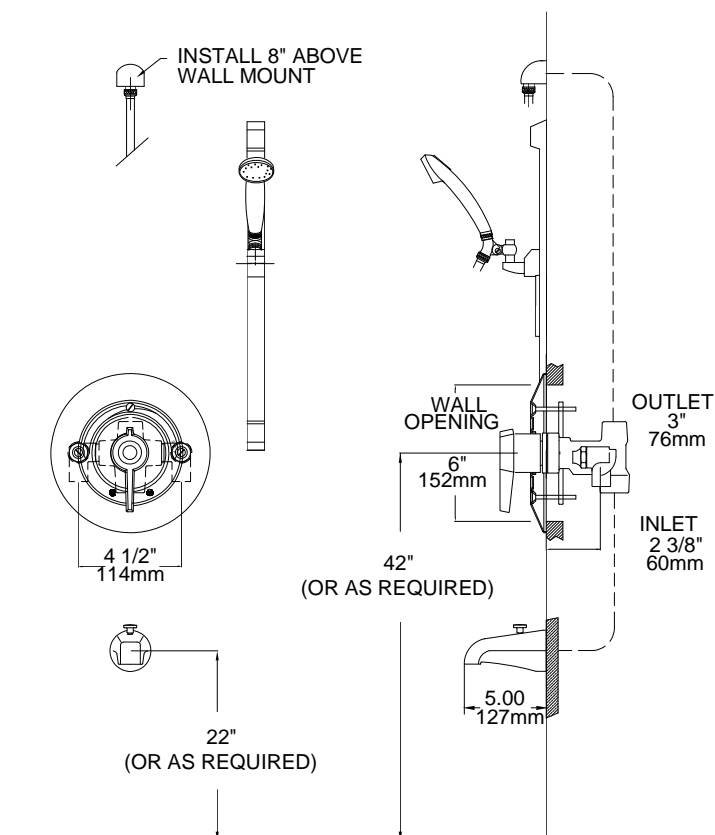

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____