




Z1108-L ANGLED FLOW CONTROL

SPECIFICATION SHEET

TAG _____

Dimensions Subject to Manufacturing Tolerances

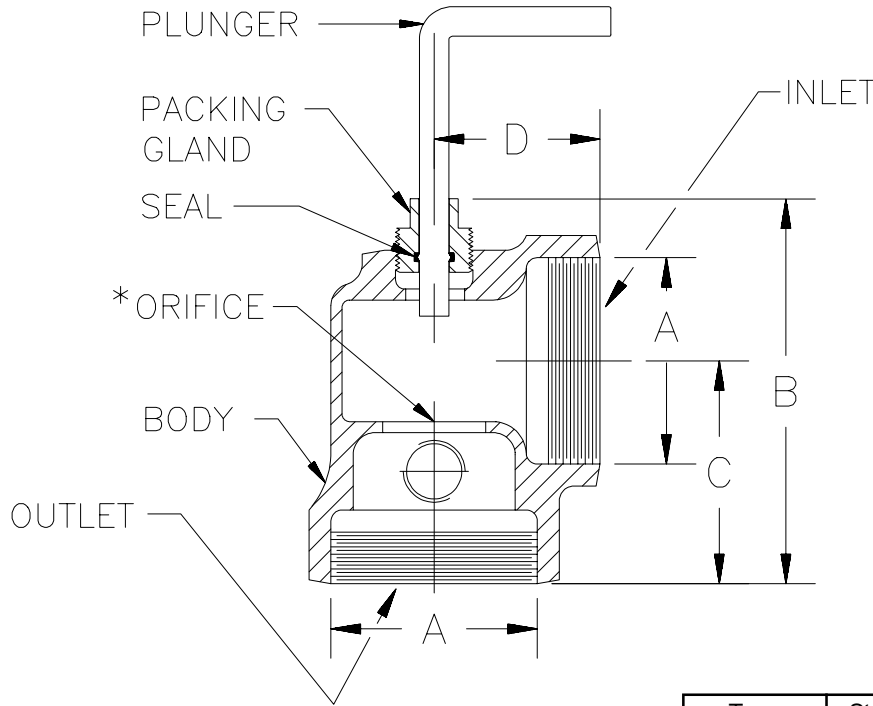

Trap Flow Rate Size/GPM	Standard Size Orifice Inches*
4 [15]	5/8 [16]
7 [26]	5/8 [16]
10 [38]	15/16 [24]
15 [57]	15/16 [24]
20 [76]	1 1/4 [32]
25 [95]	1 1/4 [32]
35 [132]	1 1/2 [38]
50 [189]	1 3/4 [44]

A	B	C	D
2 NPT	5-3/4 [146]	3-3/8 [86]	1-7/8 [48]
3 NPT	6-3/8 [162]	3-3/4 [95]	2-3/4 [70]
4 NPT	9-1/8 [232]	5-1/4 [133]	5-1/4 [133]

*WITH 1' [305] (ONE FOOT OF HEAD)

ENGINEERING SPECIFICATION: ZURN Z1108-L Sani-Coated cast iron body with air intake opening.

Flow control is installed in line between fixture and grease interceptor. Its function is to regulate the flow so that it will not exceed the flow rate capacity of the grease interceptor, thus insuring foolproof operation and maximum efficiency. If the orifice becomes clogged with solid material, it can be cleared easily by using plunger. An air intake (or vent) must be used to insure proper operation of interceptor.

REV. B DATE: 12/17/02 C.N. NO. 90123
 DWG. NO. 58510 PRODUCT NO. Z1108-L

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED