




# Z1108

## STRAIGHT THRU FLOW CONTROL

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

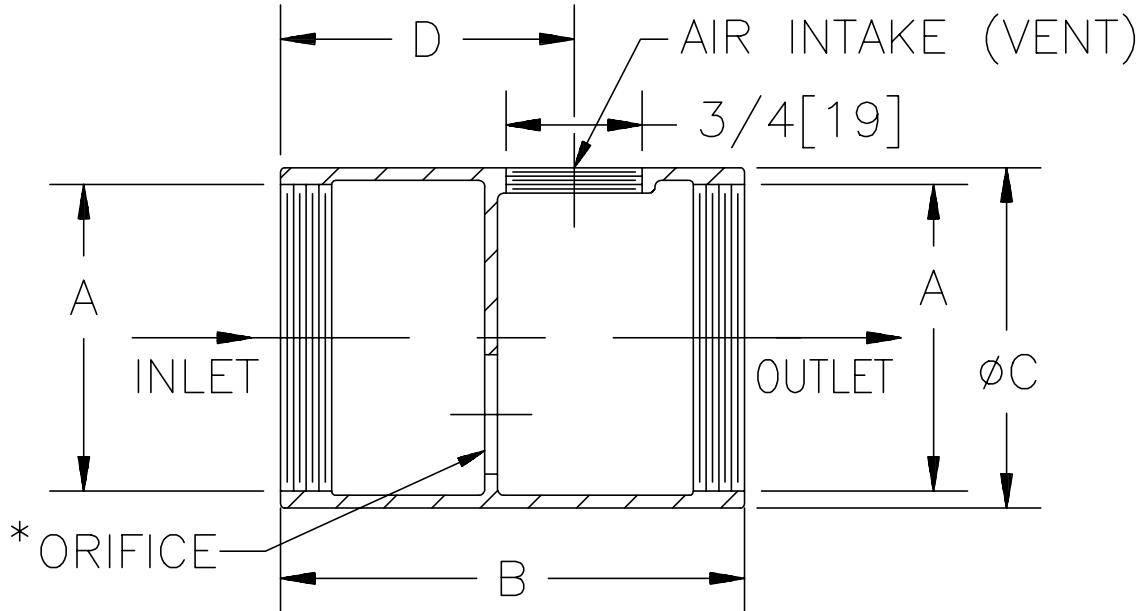

Trap Flow Rate Size/GPM	Standard Size Orifice Inches*
4 [15]	5/8 [16]
7 [26]	5/8 [16]
10 [38]	15/16 [24]
15 [57]	15/16 [24]
20 [76]	1 1/4 [32]
25 [95]	1 1/4 [32]
35 [132]	1 1/2 [38]
50 [189]	1 3/4 [44]

A	B	C	D
2 NPT	5 7/16 [138]	2 7/8 [73]	3 13/16 [97]
3 NPT	6 1/8 [156]	4 [102]	4 1/8 [105]
4 NPT	6 13/16 [173]	5 [127]	4 3/4 [121]

\*WITH 1' [305] (ONE FOOT OF HEAD)

**ENGINEERING SPECIFICATION:** ZURN Z1108 Sani-Coated cast iron body with air intake opening.

Flow control is installed in line between fixture and grease interceptor. Its function is to regulate the flow so that it will not exceed the flow rate capacity of the grease interceptor, thus insuring foolproof operation and maximum efficiency. An air intake (or vent) must be used to insure proper operation of interceptor.

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. B    DATE: 12/12/02    C.N. NO. 90118

DWG. NO. 58904    PRODUCT NO. Z1108

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292