

# ACCESSORIES

## 500P

- Hand spray
- Braided stainless steel flexible and extends out from 60" to 84".
- 2 wall hooks
- Double check valve backflow preventer
- Supply elbow and flange
- 2.5 GPM (9.5 l/min.) max. flow rate

## 501P(G)

- Hand spray
- Braided stainless steel flexible and extends out from 60" to 84".
- 24" (610mm) glide rail
- Double check valve backflow preventer
- Supply elbow and flange
- 2.5 GPM (9.5 l/min.) max. flow rate

## 501P(G)-30

- As above with 30" (762mm) glide rail

## 501P

- Hand spray
- Braided stainless steel flexible and extends out from 60" to 84".
- 24" (610mm) slide bar
- Double check valve backflow preventer
- Supply elbow and flange
- 2.5GPM (9.5 l/min.) max. flow rate

## 503P

- Same as 501P but with 48"(1219mm) slide bar

### OPTIONS:


- SUFFIX QD - Quick connector set




Hand showers must be able to be mounted between 38" and 48" above the finished floor. For ADA compliance, consult Americans with Disabilities Act or local regulations for model choices and locations.

# HAND SHOWERS


## 500P

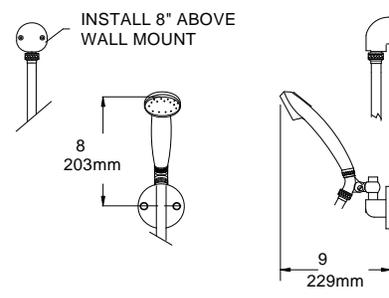

## 501P(G)

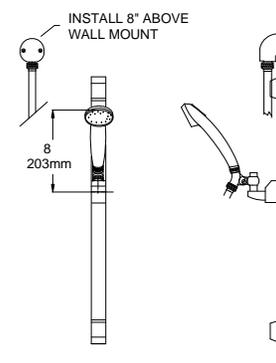

## 501P

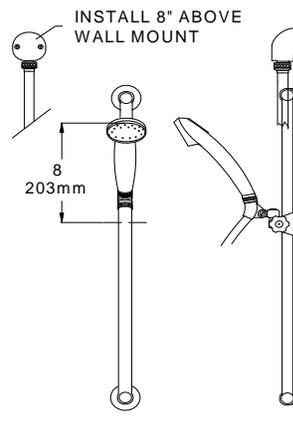


1360 Elmwood Avenue, Cranston, RI 02910 USA  
Phone: 401.461.1200 Fax: 401.941.5310  
Email: [info@leonardvalve.com](mailto:info@leonardvalve.com)  
WEB: <http://www.leonardvalve.com>

# ACCESSORIES

# VACUUM BREAKERS


## EVB

- Elevated vacuum Breaker unit
- Chrome plated
- 1/2" IPS inlet

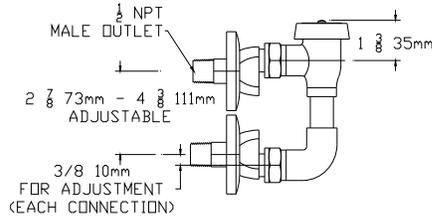

## LVB


- Vacuum Breaker unit
- Chrome plated
- 1/2" IPS inlet
- 1/2" hose connection outlet



# INSTITUTIONAL HOSE SPRAYS


## 5P

- 6 ft. (1828mm) of 3/8" rubber hose
- Plain end
- Wall hook



## 5RS


- 6 ft. (1828mm) of 3/8" rubber hose
- 3" (76mm) rose spray
- Wall hook



# INLINE VACUUM BREAKERS


## 5SCRS

- 6 ft. (1828mm) 3/8" rubber hose
- Self closing rose spray
- Wall hook



## INVB


- Inline vacuum breaker
- 1/2" IPS inlet
- 1/2" hose connection outlet
- ASSE 1014 Listed



# FLUSH MOUNTED DIAL THERMOMETER

## 37C50FL

- 1 15/16" (49mm) bulb
- 25 to 125°F, 0 to 50°C
- 3" (76mm) white dial, black printing
- Wall flange, mounting bracket, screws and gasket

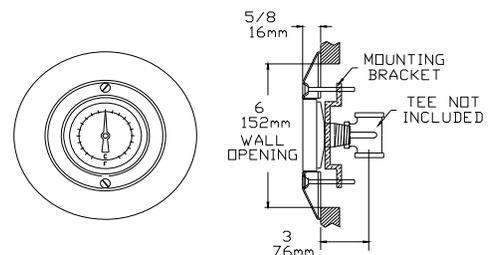

1360 Elmwood Avenue, Cranston, RI 02910 USA  
 Phone: 401.461.1200 Fax: 401.941.5310  
 Email: [info@leonardvalve.com](mailto:info@leonardvalve.com)  
 WEB: <http://www.leonardvalve.com>