

7600 Showermaster®

76-4A

1/2" inlets & outlet

CONCEALED PIPING



7600 Thermostatic Showermaster®


- Tub/shower installation
- Copper encapsulated thermostat assembly with brass shuttle, compensates for temperature fluctuations induced by water temperature and pressure changes
- Built-in shutoff for single handle operation
- Maximum operating pressure: 125 PSI (860 KPA)
- Adjustable high temperature limit stop set for 110°F (43°C)
- Dial, Off through Hot, with directional indicators
- 1/2" inlets and outlet
- 501P(G) Hand Shower (2.5GPM, 9.5 l/min), with glide rail, double check valve assembly, elbow and flange
- D2L-Diverter valve, for switching from shower head to hand shower.
- H-02 ball joint, adjustable spray shower head (2.5 GPM, 9.5 l/min.)
- D-Diverter spout

VALVE IS ASSE 1016 T/P LISTED
 VALVE IS CUPC LISTED



Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

Note: All piping and fittings not furnished by manufacturer.

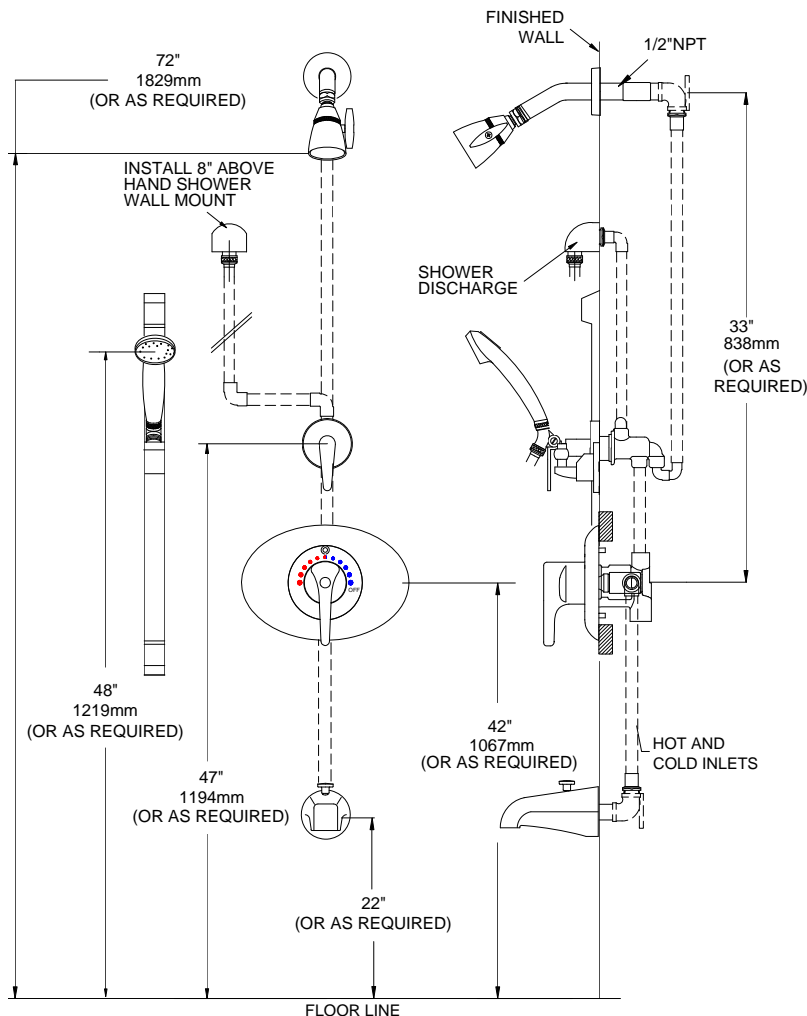

All Leonard Model 7600 Thermostatic Shower Valves have limitations. Please keep in mind that per the ASSE 1016-2011 Performance Standard, Harmonized along with ASME and CSA, it dictates inlet conditions of equal pressures, 45 PSI on both Hot and Cold Inlets, in addition to a Hot supply temperature range of 140 deg F- 180 deg F. Significant deviations from those conditions stated above will alter performance expectations.

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____



1360 Elmwood Avenue, Cranston, RI 02910 USA
 Phone: 401.461.1200 Fax: 401.941.5310
 Email: info@leonardvalve.com
 Web Site: <http://www.leonardvalve.com>