

7600 Showermaster®

7600-C-60-1

7600-C-60-7

1/2" inlets & outlet CONCEALED PIPING

Valve is ASSE 1016 T/P listed



Valve is CUPC listed



7600 Thermostatic Showermaster®


- Tub/shower installation
- Copper encapsulated thermostat assembly with brass shuttle, compensates for temperature fluctuations induced by water temperature and pressure changes
- Built-in shutoff for single handle operation
- Integral checkstops
- Cast wall flange and lever handle, polished chrome plated
- Maximum operating pressure: 125 PSI (860 KPA)
- Adjustable high temperature limit stop set for 110°F (43°C)
- Dial thermometer (25 to 125°F), with wall flange and mounting bracket
- Elevated vacuum breaker with hose connection
- 6 feet (1829mm) of rubber hose, wall hook
- 1/2" sweat inlets and outlet, threaded bottom outlet.

OPTIONS:

7600-C-60-7 Same as above but less vacuum breaker, hose, wall hook

Note: All piping and fittings not furnished by manufacturer.

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

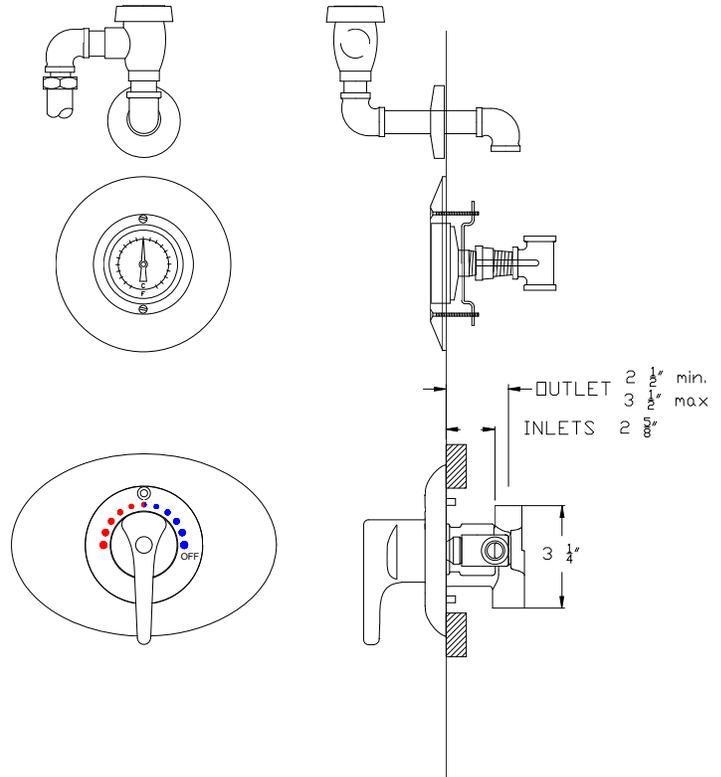

All Leonard Model 7600 Thermostatic Shower Valves have limitations. Please keep in mind that per the ASSE 1016-2011 Performance Standard, Harmonized along with ASME and CSA, it dictates inlet conditions of equal pressures, 45 PSI on both Hot and Cold Inlets, in addition to a Hot supply temperature range of 140 deg F- 180 deg F. Significant deviations from those conditions stated above will alter performance expectations.

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____