
TAG:	

Easy Install Pre-Rinse Unit

Architect/Engineering Specifications:

8" wall mount mixing faucet with polished chrome plated brass body, add-on faucet with compression cartridge and lever handle, 6" swing nozzle with stream regulator outlet, 18" riser, 44" flexible stainless steel hose, 0.65 GPM spray valve with insulated grip handle, compression cartridges with spring checks, lever handles, 1/2" NPT female inlets, 6" adjustable wall bracket, spray valve holder and overhead spring. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. EPAct 2005 compliant.

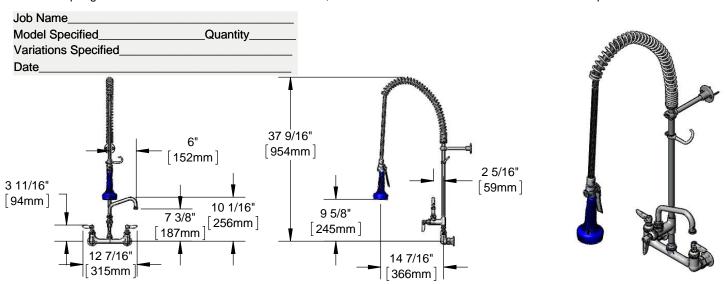

Features & Benefits:

- 8" wall mount mixing faucet w/ polished chrome plated brass body
- EasyInstall add-on faucet w/ polished chrome plated brass body
- 6" swing nozzle w/ stream regulator outlet, Series 1
- 18" rigid riser
- 44" flexible stainless steel hose
- 0.65 GPM JeTSpray spray valve with insulated grip handle, stainless steel trigger and trigger lock
- Eterna compression cartridges with internal spring checks to prevent cross flow of water
- Lever handles w/ color coded indexes
- 1/2" NPT female eccentric inlets with Ø 2" flanges
- Adjustable centers from 7 3/4" to 8 1/4"
- 6" adjustable wall bracket
- Material: Polished chrome plated brass body, tubular nozzle, add-on faucet body, riser & spray valve body, stainless steel hose and chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- EPAct 2005 (PRSV)
- EPA WaterSense (PRSV)

Warranty: Three Year (Limited)

Performance Data:

Pressure: 20 - 125 psi Temperature: 40 °F - 140 °F

Flow Rate:

Spray Valve: 0.65 GPM @ 60 psi Add-On Faucet: 8.91 GPM @ 60 psi









Optional Add-On Faucet Outlets (Series 1 / VR Series 6)

GPM	Aerated	VR Aerated (VR Laminar)
1.0	□ B-0199-01-F10	□ B-0199-06-F10
1.5	□ B-0199-01-WS	□ B-0199-06-WS
2.2	□ B-0199-01	□ B-0199-06

Optional Cartridges With Checks

□ Quarter-Turn Cerama w/ Check Valve □ Quarter-Turn Eterna w/ Spring Check (Standard)

Optional Handles Optional Pre-Rinse Spray Valves

□ 4" Wrist Action □ Lever (Standard)

□ 4-Arm

- □ B-0107 (1.42 GPM) □ B-0107-C (0.65 GPM)
- □ B-0107-J (1.07 GPM) □ B-0108 (1.48 GPM)
 - ☐ B-0108-Č (0.65 GPM) (Standard)







