



Architect/Engineering Specifications:




Wall mount outlet with polished chrome plated brass spout with pail hook and garden hose male outlet, upper support rod and 1/2" NPT female inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

Job Name _____

Model Specified _____ Quantity _____

Variations Specified _____

Date _____

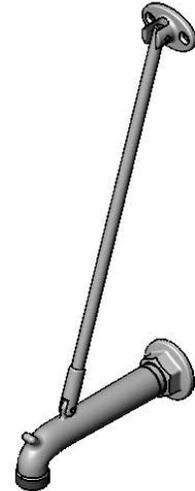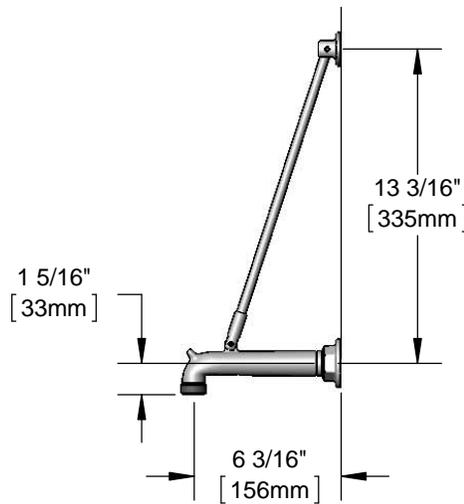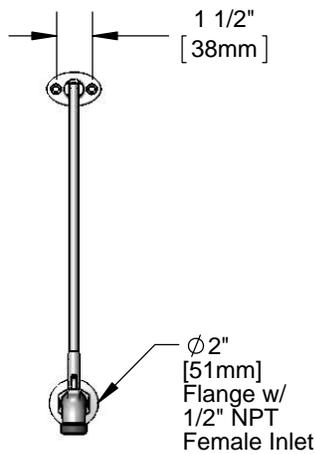

Features & Benefits:

- Wall mount outlet w/ polished chrome plated brass spout
- 6 1/8" spout w/ garden hose outlet & pail hook
- Ø2" flange w/ 1/2" NPT female inlet
- Material: Polished chrome plated brass body, spout & flange

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)



Warranty: One Year (Limited)



Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 31.05 GPM @ 60 psi

