



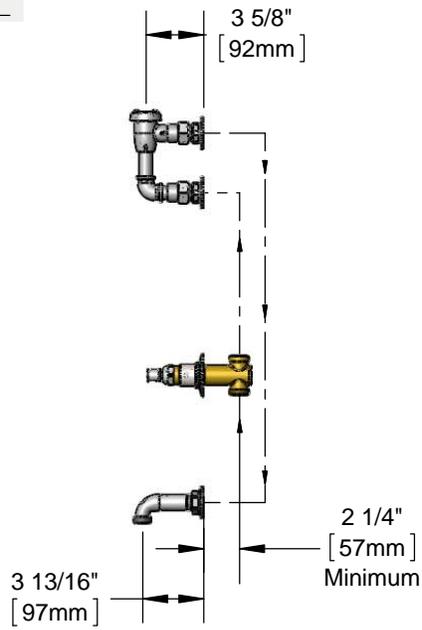

Architect/Engineering Specifications:

Wall mount, loose key style shutoff valve with brass body and polished chrome plated adjustable wall flange and sleeve, polished chrome plated brass spout with male garden hose outlet, elevated 1/2" atmospheric vacuum breaker assembly, 1/2" NPT female inlets and outlets. Certified to ASME A112.18.1/CSA B125.1 and ASSE 1001.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

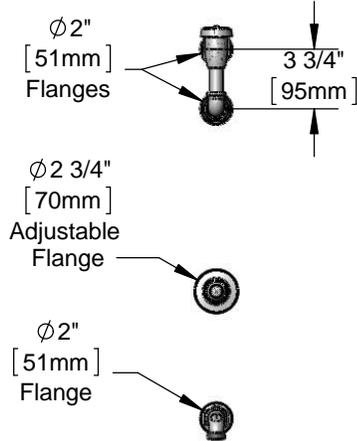

Features & Benefits:

- Wall mount, loose key style shutoff valve w/ brass body & tee handle
- $\phi 2 \frac{3}{16}''$ polished chrome plated brass adjustable wall flange & sleeve
- Spout w/ male garden hose outlet
- $\phi 2''$ polished chrome plated wall flanges
- 1/2" NPT female inlets & outlets
- Elevated 1/2" NPT atmospheric vacuum breaker assembly
- Material: Brass shutoff valve body, polished chrome plated brass spout and wall flanges & metal tee handle

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Exempt (Non-Potable)
- ASSE 1001 (VB)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 15.80 GPM @ 60 psi

