

Location: _____




C1000

**STAINLESS STEEL FLOOR CLEANOUT WITH
HEAVY DUTY ADJUSTABLE COVER AND PLUG**

Specification: MIFAB C1000 Series (specify top assembly design) adjustable floor cleanout with lacquered cast iron body and anchor flange, secondary "O" ring Test Seal, 4" diameter cleanout opening and heavy duty cast stainless steel scoriated combined cover and plug top assembly with stainless steel vandal proof allen key screws and primary gasket seal. (For membrane floors, add Suffix -C for membrane clamp.)

Function: Used in finished floors to provide emergency access to the plumbing lines for removal of blockages. Replacement of the surface level cover/plug with the neoprene gasket glued to the underside provides visual evidence that the cleanout has been properly resealed to prevent harmful sewer gases from entering the building. Heavy duty, cast, Type 304 stainless steel cover and plug ensures long life.

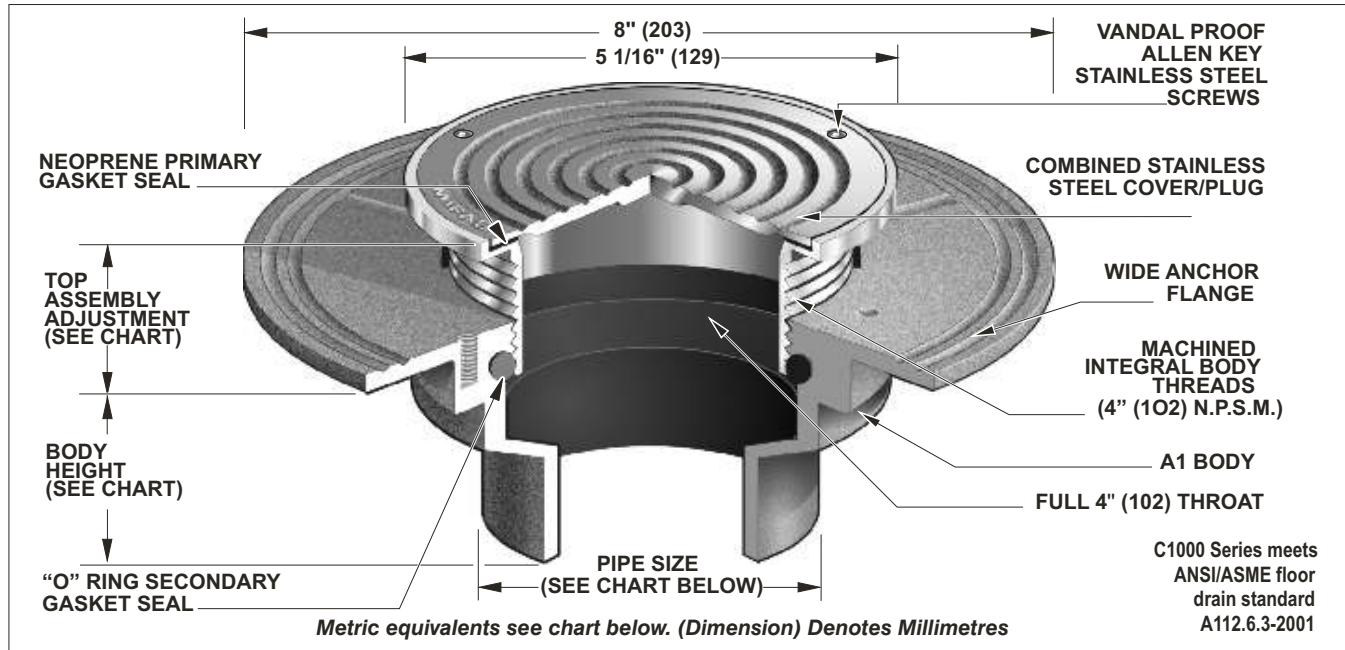

TOP ASSEMBLY DIAMETER	TOP ASSEMBLY ADJUSTMENT		ANSI/ASME RATING LOAD RATING		PIPE SIZE	BODY HEIGHT				
	MIN	MAX	S.S. (-3)	D.I. (-4)		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
5" (127)	1/2" (13)	1 1/4" (32)	5,000 to 7,499 LBS.	SPECIAL DUTY OVER 10,000 LBS.	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
					3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					5" (127)	3" (76)	—	2 5/8" (67)	3 3/4" (95)	—
					6" (152)	3 1/4" (83)	6 1/2" (165)	—	—	—

SUFFIX OPTIONAL VARIATIONS:

- 3 Heavy duty stainless steel top assembly
- 4 Extra heavy duty ductile iron top assembly for unfinished areas
- 6 Security screws (TR25 Torx & pin)
- 6S 6" x 6" square top assembly (-1 or -3 only)
- 11 Acid resistant epoxy coated body
- 13 Galvanized body
- 15 Extension
- 28 Stainless steel body (Type 304)
- 30 PVC socket connection body
- 31 ABS socket connection body
- 34 Secondary closure plug
- 90 Threaded side outlet (2", 3", 4") (cast iron only)

SUFFIX

- 90NH No hub side outlet (2", 3", 4") (cast iron only)
- 95 Special marking etched into top (SAN for sanitary or GW for Grease Waste)
- ARRA ARRA (Stimulus Act) compliant product
- BA Buy American Act compliant product
- C Membrane clamp
- (Standard) No hub outlet
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- R Round top assembly
- RC Stainless steel carpet maker

SUFFIX

- RCF Stainless steel carpet flange cover (-1 or -3 only)
- S Square top assembly (-1 or -3 only) (5" x 5")
- T Round top assembly recessed 1/8" for tile
- T Threaded outlet (2", 3", 4")
- TS Square top assembly recessed 1/8" for tile (-1 or -3 only)
- UR Round top assembly recessed 1 1/4" for terrazzo (-1 or -3 only)
- US Square top assembly recessed 1 1/4" for terrazzo (-1 or -3 only)
- X Inside caulk outlet
- Z Extended wide elastomeric flange

Job Name: _____
 Section No: _____
 Schedule No: _____

Page No: _____
 Contractor: _____
 Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880