
S



## FLOOR CLEANOUT WITH ADJUSTABLE COVER AND PLUG

**Specification:** MIFAB C1100 Series (specify top assembly design) adjustable floor cleanout with lacquered cast iron body and anchor flange, secondary "O" ring Test Seal, 4" diameter cleanout opening and scoriated combined cover and plug top assembly (specify material type) with stainless steel vandal proof allen key screws and primary gasket seal. (For membrane floors, add Suffix -C for membrane clamp.)

**Function:** Used in finished floors to provide emergency access to the plumbing lines for removal of blockages. Replacement of the surface level cover/plug with the neoprene gasket glued to the underside provides visual evidence that the cleanout has been properly resealed to prevent harmful sewer gases from entering the building.

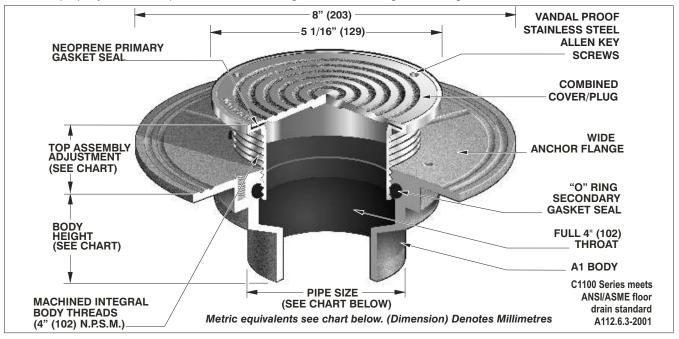

TOP ASSEMBLY	TOP ASSEMBLY DIAMETER ADJUSTMENT MIN MAX		ANSI/ASME RATING Load rating N.B. (-1) S.S. (-3) D.I. (-4)		PIPE		BODY HEIGHT					
DIAMETER					SIZE		NO HUB (Standard)	PUSH ON (P)	THREADED (T)	INSIDE Caulk (X)	PVC/ABS (-30)/(-31)	
5" (127)	1/2" (13)	1 1/4" (32)		5,000 TO	SPECIAL DUTY	l	(51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
			4,999 LBS.	7,499 LBS.	OVER 10,000	3"	(76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
			LDO.	LDO.		4"	(102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					LBS.	5"	(127)	3" (76)	_	2 5/8" (67)	3 3/4" (95)	_
						6"	(152)	3 1/4" (83)	6 1/2"(165)	_	_	_

			` ′	` '	,	′			
SUFFIX	OPTIONAL VARIATIONS:	SUFFIX				SUFFIX			
-1	Nickel bronze top assembly	-90NH	No hub side outlet (2", 3", 4") (cast iron only)  Special marking etched into top			-RCF	Stainless steel carpet flange		
-3	Heavy duty stainless steel top assembly	-95				-S	cover (-1 or Square top	-3	
-4	<ul> <li>Extra heavy duty ductile iron top assembly for unfinished areas</li> </ul>		(SAN for sa GW for Gre	,		-T	only) (5" x 5	sed	
-6 -6S	Security screws (TR25 Torx & pin) 6" x 6" square top assembly	-ARRA	ARRA (Stim	,		Т	1/8" for tile Threaded o		
	(-1 or -3 only)	-BA	Buy Americ	an Act		-TS	Square top for tile (-1 o	assembly reces	sed 1/8"
-11	Acid resistant epoxy coated body	-C (Standard)	Membrane No hub out	clamp		-UR	Round top	assembly recess -1 or -3 only)	sed 1 1/4"
-13 -15	Galvanized body Extension	P	Push on ou	tlet		-US	Square top	assembly recess	sed 1 1/4"
-28 -30 -31	Stainless steel body (Type 304) PVC socket connection body ABS socket connection body	-PA -R	Pennsylvania Steel Act compliant product Round top assembly		X -XR	for terrazo (-1 or -3 only) Inside caulk outlet Heavy duty round top assembly			
-34	Secondary closure plug	-RC	Stainless st	eel carpet make	er	-XS	Heavy duty	square top asse	embly
-90	Threaded side outlet (2",3",4") (cast iron only)					-Z	Extended w	ide elastomeric	flange

Job Name:	Page No:					
Section No:	Contractor:					
Schedule No:	Purchase Order No:					
MIFAB reserves the right to make changes in material and design without formal notice and obligation.	USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880					