

Location: _____




F1000-C-S

FLOOR DRAIN WITH HEAVY DUTY SQUARE STAINLESS STEEL STRAINER AND MEMBRANE CLAMP

Specification: MIFAB Series F1000-C-S(*)-3 (* specify strainer size) lacquered cast iron floor drain with anchor flange, weepholes, membrane clamp, and standard heavy duty square polished stainless steel strainer.

Function: Used in showers, kitchens, restrooms, and other membrane finished areas. Square adjustable stainless steel strainer is used for floors that are finished of material or straight line patterns.

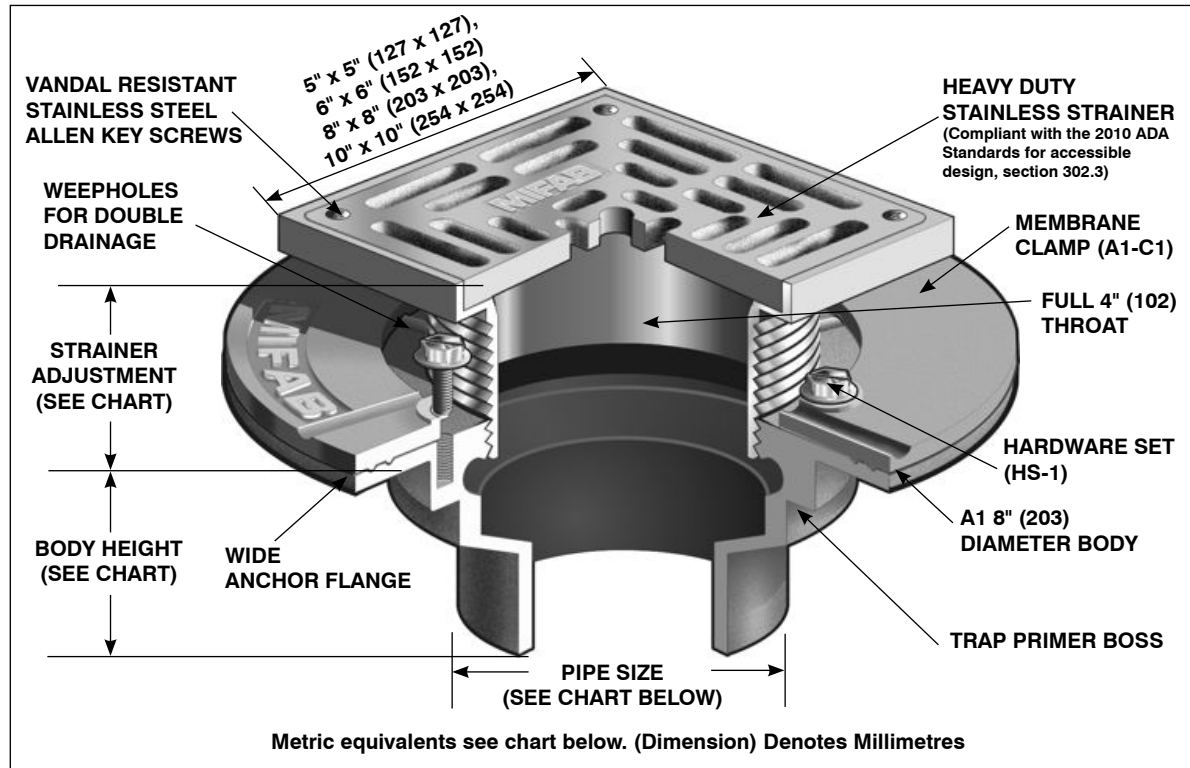


PARTS:



A1 BODY



(*) -3
(*) Denotes Strainer Size



A1-C1



HS-1

F1000-C-S Series meets ANSI-ASME floor drain standard A112.6.3-2001

STRAINER SIZE	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
	MIN	MAX	FREE AREA	LOAD RATING LBS. S.S. (-3)		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
5"x5" (127)	5/8" (15)	1 9/16" (40)	9 in ² (5800 ²)	5000-7499	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
6"x6" (152)	7/8" (22)	1 9/16" (40)	12 in ² (7700 ²)	5000-7499	3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
8"x8" (203)	1 1/4" (32)	2 3/16" (56)	26 in ² (16800 ²)	5000-7499	4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
10"x10" (254)	1 1/4" (32)	2 3/16" (56)	28 in ² (19913 ²)	5000-7499	5" (127)	3" (76)	--	2 5/8" (67)	3 3/4" (95)	--
					6" (152)	3 1/4" (83)	6 1/2" (165)	--	--	--

SUFFIX OPTIONAL VARIATIONS

- 3 Stainless steel strainer (standard)
- 5 Sediment bucket
- 6 Security screws (T-20 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 13 Galvanized body
- 15 Extension
- 21 Secondary flat stainless steel strainer (2", 3", 4")
- 28 Stainless steel body (Type 304)
- 30 PVC socket connection body
- 31 ABS socket connection body

SUFFIX OPTIONAL VARIATIONS

- 34 Closure plug
- 40 Underdeck clamp
- 41 Sump receiver
- 90 Threaded side outlet (2", 3", 4") (cast iron only)
- 90NH No hub side outlet (2", 3", 4") (cast iron only)
- 95 Client logo
- BA Buy American Act compliant product

SUFFIX OPTIONAL VARIATIONS

- C2 High rough-in membrane clamp (min. 1 9/16" (40))
- F4 4" Round funnel
- F6 6" Round funnel
- G Oval 4" x 9" funnel
- HP Heel proof grate (1/4" maximum grate opening size, -3 only)
- J 3" x 1" funnel
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4")
- X Inside caulk outlet
- Z Extended wide elastomeric flange

Job Name: _____
 Section No: _____
 Schedule No: _____

Page No: _____
 Contract: _____
 Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice or obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880