


TAG

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

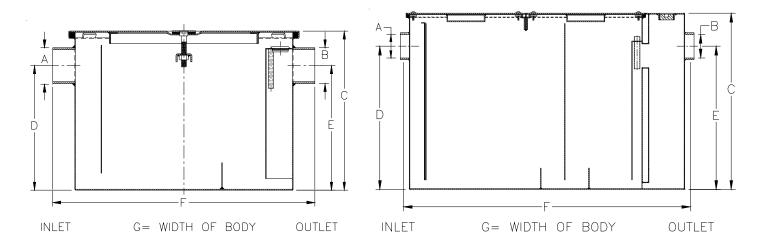

GT2700-4 through GT2700-50

GT2700-75 & GT2700-100

| Model<br>Number | A/B<br>Inlet/Outlet<br>No-Hub | Flow Rate<br>G.P.M.<br>[L] | Capacity<br>Grease<br>Lbs. [kg] | Dimension in Inches |               |               |              |
|-----------------|-------------------------------|----------------------------|---------------------------------|---------------------|---------------|---------------|--------------|
|                 |                               |                            |                                 | С                   | D/E           | F             | G            |
| GT2700-4        | 2 [51]                        | 4 [15]                     | 8 [4]                           | 10 [254]            | 7-1/4 [184]   | 16-3/8 [416]  | 9-7/8 [251]  |
| GT2700-7        | 2 [51]                        | 7 [26]                     | 14 [6]                          | 11-1/8 [283]        | 8-1/8 [206]   | 17-3/4 [451]  | 11-7/8 [302] |
| GT2700-10       | 2 [51]                        | 10 [38]                    | 20 [9]                          | 11-3/4 [298]        | 8-1/4 [210]   | 19-3/4 [502]  | 14 [356]     |
| GT2700-15       | 2 [51]                        | 15 [57]                    | 30 [14]                         | 13-3/8 [340]        | 9-3/8 [238]   | 21-3/4 [552]  | 16-3/4 [425] |
| GT2700-20       | 3 [76]                        | 20 [76]                    | 40 [18]                         | 15 [381]            | 11-3/4 [298]  | 24-5/8 [625]  | 17-1/4 [438] |
| GT2700-25       | 3 [76]                        | 25 [94]                    | 50 [23]                         | 17 [432]            | 12-7/16 [316] | 26-5/8 [676]  | 19-7/8 [505] |
| GT2700-35       | 4 [102]                       | 35 [132]                   | 70 [32]                         | 18-3/4 [476]        | 14-3/16 [360] | 28-1/2 [724]  | 22-1/2 [572] |
| GT2700-50       | 4 [102]                       | 50 [189]                   | 100 [45]                        | 21-1/2 [546]        | 16 [406]      | 30-3/8 [772]  | 24-1/2 [622] |
| GT2700-75       | 4 [102]                       | 75 [283]                   | 150 [68]                        | 22-3/4 [587]        | 18-1/2 [470]  | 40-1/4 [1022] | 28-5/8 [727] |
| GT2700-100      | 4 [102]                       | 100 [379]                  | 200 [91]                        | 27 [685]            | 23 [584]      | 44 [1118]     | 33-5/8 [854] |

## **GT2700 Grease Interceptor**

Recommended for removing and retaining grease from wastewater in kitchen and restaurant areas where food is prepared. Grease trap is corrosion-resistant coated fabricated steel with no-hub connections, flow diffusing baffle, integral trap, and vented inlet flow control device.

## OPTIONS

\_\_\_\_\_ -JP2

-JP2700 6 [152] Extension



Sizes 4 - 50

Sizes 20 G.P.M. - 50 G.P.M.

\* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Light Commercial Plumbing Products 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929 In Canada | Zurn Industries Limited 3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292 WWW.ZURN.COM

Rev. C Date: 2/15/2018 C.N. No. 139638 Prod. | Dwg. No. GT2700