



SHOWER HEADS

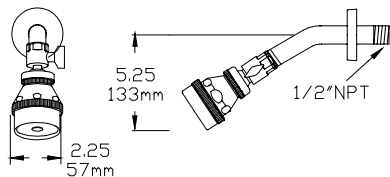


H-01 (AC-11)

- Brass shower head
- Volume control
- Ball joint
- Arm & flange
- 2.5 GPM (9.5l/m) max. flow rate

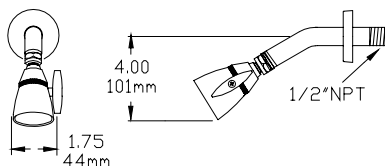


H-02

- Brass shower head
- Adjustable spray
- Ball joint
- Arm & flange
- 2.5 GPM (9.5l/m) max. flow rate

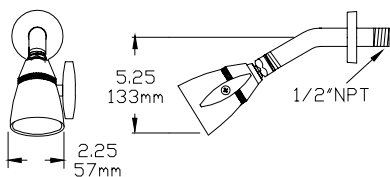


H-03

- Brass shower head
- Adjustable spray
- Ball joint
- Arm & flange
- 2.5 GPM (9.5l/m) max. flow rate

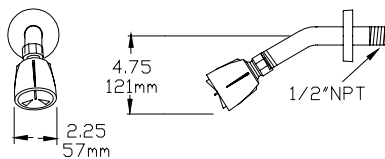


H-05

- ABS shower head
- Ball joint
- Arm & flange
- 2.5 GPM (9.5l/m) max. flow rate

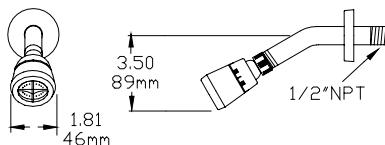

H-16

- ABS shower head
- Adjustable spray
- Brass ball joint
- Arm & flange
- 2.5 GPM (9.5l/m) max. flow rate

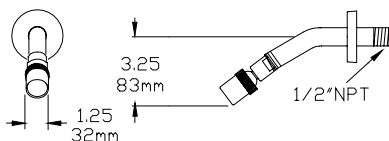

C-10-2S

- Brass shower head
- Ball joint
- Arm & flange
- 2.0 GPM (7.6l/m) max. flow rate, pressures up to 80 PSI.

OPTIONS

___SUFFIX V- Separate volume control, lever adjustment.

___SUFFIX CFL- Cast flange with set screw

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____