

# INDUSTRY HOSE STATION

## SW-75-1572-HDHR-50HDH-N2

### \_\_\_SW-75-1572


- Volume control/shutoff with heat resistant handle (RED).
- 3/4" IPS water inlet, 3/4" IPS water outlet.
- Special bracket for wall mounting.
- Hose connection.
- Rough finish.
- Maximum operating pressure: 125 PSI (8.5 Bar)

### ACCESSORIES

- N2- Standard Hose Nozzle
- SC- Spring Clip.
- HDHR- Heavy Duty Hose Rack, welded construction, 1/4" saddle, 1/8" stainless steel face and backplate.
- 50 HDH- Heavy Duty Hose, fifty feet, 3/4" EDPM cream color cover, high temperature resistant.
- 80 PSI (5.5 bar) maximum operating steam pressure.
- 125 PSI (8.5 bar) maximum operating water pressure.
- OSHA approved safety sign.

### OPTIONAL ACCESSORIES

- \_\_\_N2-SS- Body and internal parts of stainless steel.
- \_\_\_75 HDH- Seventy five feet of heavy duty hose.
- \_\_\_100 HDH- One hundred feet of heavy duty hose
- \_\_\_SP- Stainless Steel Spring protector, furnished on one end of hose.
- \_\_\_SW- Bronze Swivel attachment on hose.
- \_\_\_CP- Chrome plated finish

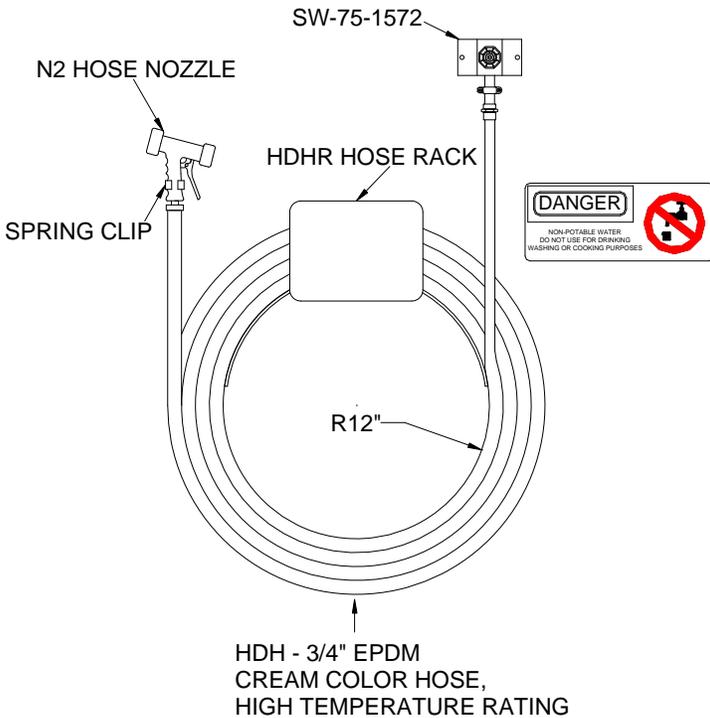

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation

Job # _____	<b>Engineer's Approval</b>
Arch/Eng. _____	
Contractor _____	



1360 Elmwood Avenue, Cranston, RI 02910 USA  
Phone: 401.461.1200 Fax: 401.941.5310  
Email: [info@leonardvalve.com](mailto:info@leonardvalve.com)  
Web Site: <http://www.leonardvalve.com>