
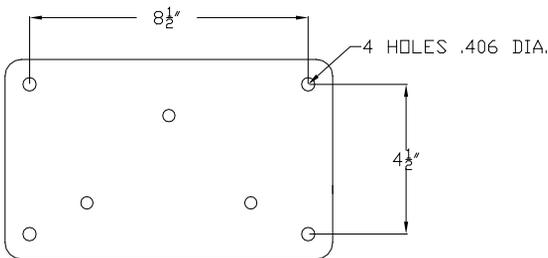


INDUSTRY HOSE STATIONS

SW-75-EVBD
SW-75-EVB
SW-75-E

MANUAL STEAM & WATER BLENDERS

Mix hot & cold water OR steam & water

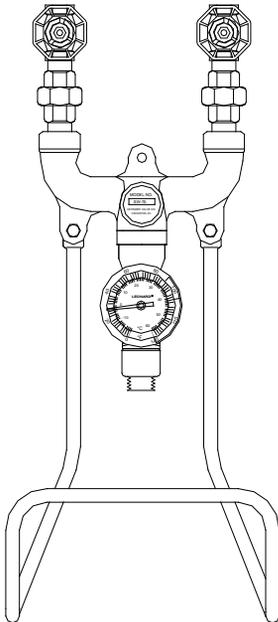

18100 Optional mounting plate

SW-75-EVBD

- Manual Steam & Water Blender
- 3/4" IPS steam (or hot water) inlet, 3/4" IPS cold water inlet
- Two stop and check valves with color coded heat resistant handles on inlets, (internal parts of stainless steel construction)
- Mixing chamber with steam jet, (stainless steel)
- 3/4" outlet with dial thermometer (20 to 240°F, -5 to 115°C)
- Vacuum breaker
- Chrome plated finish
- Hose connection
- Stainless steel hose rack
- 80 PSI (5.5 bar) maximum operating steam pressure
- 125 PSI (8.6 bar) maximum operating water pressure

SW-75-EVB -Less dial thermometer

SW-75-E - Less dial thermometer & vacuum breaker

SW-75-ED-Less vacuum breaker

OPTIONS:

SUFFIX RF - Rough bronze finish

18100 -Stainless steel mounting plate

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____



1360 Elmwood Avenue, Cranston, RI 02910 USA


Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com


Web Site: <http://www.leonardvalve.com>

MANUAL STEAM & WATER BLENDERS


SW-75-EVBD

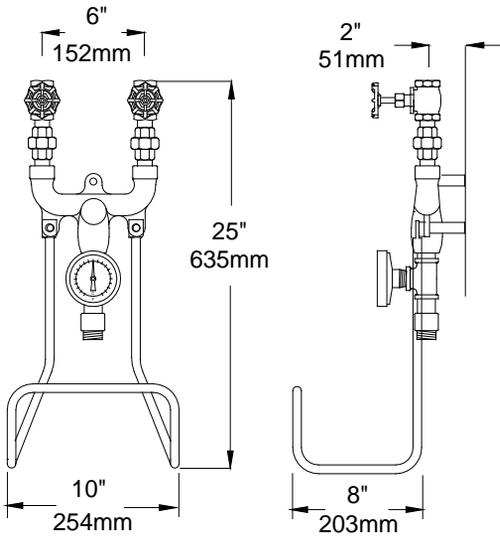


SW-75-EVB

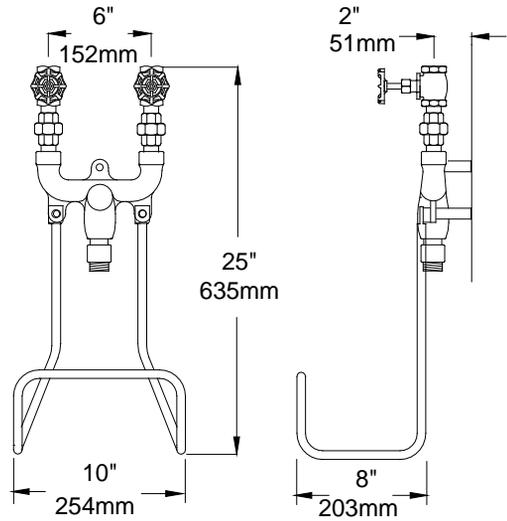


SW-75-E

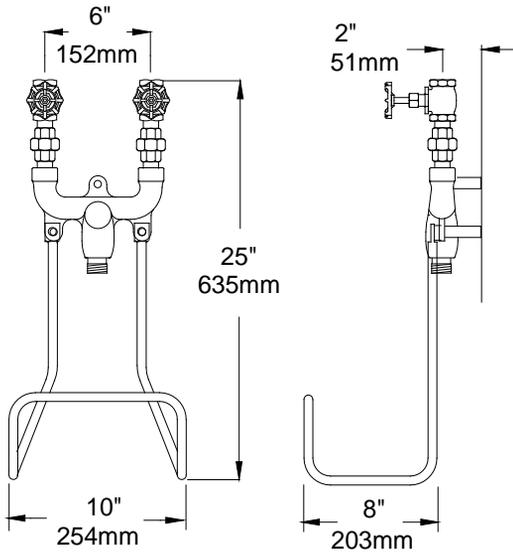

SW UNITS
MIXING STEAM AND COLD WATER

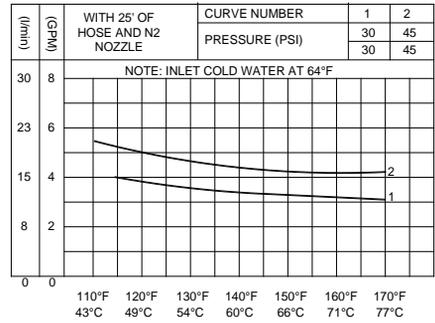

SW, CW UNITS
MIXING STEAM AND COLD WATER

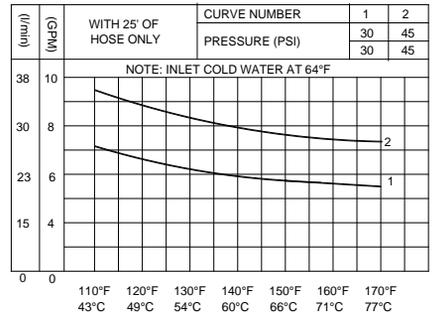

IMPORTANT! The prevailing steam (or hot water) pressure must be slightly lower than the cold water pressure.

Not for use with unequal pressures. Install pressure reducing valves where unequal pressure conditions exist.

CAUTION: These valves may pass live steam under certain circumstances. Follow recommended operating instructions and wear protective clothing when using.

NOTE: Hose and nozzle not included. If required, please attach separate submittal sheet.



1360 Elmwood Avenue, Cranston, RI 02910 USA

Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com