




Z1170-R

ADJUSTABLE RECESSING RECEIVER FOR GREASE INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

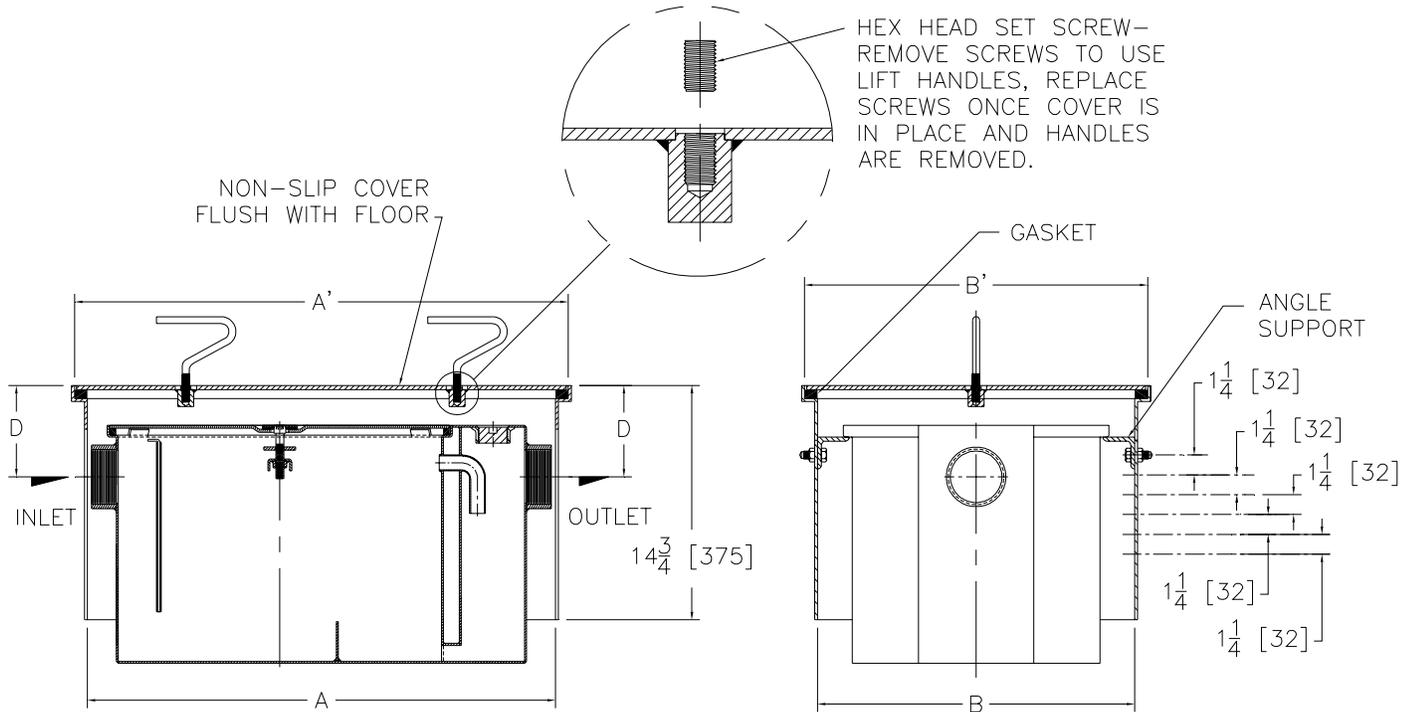

Dimensions in Inches					
Size	A	A'	B	B'	D
100	20 1/8 [511]	21 5/8 [549]	12 3/4 [324]	14 5/8 [371]	4 3/4 [121]
200	22 1/8 [562]	23 5/8 [600]	15 3/8 [391]	17 1/4 [438]	5 [127]
300	25 3/8 [645]	26 7/8 [683]	17 1/2 [445]	19 3/8 [492]	5 1/2 [140]
400	32 [813]	33 1/2 [851]	20 [508]	21 7/8 [556]	6 [152]
500	29 13/16 [757]	31 5/16 [795]	20 3/4 [527]	22 5/8 [575]	5 1/4 [133]
600	34 3/8 [873]	35 7/8 [911]	23 1/4 [590]	25 1/8 [638]	6 9/16 [167]
700	35 3/8 [898]	35 7/8 [911]	26 [660]	27 7/8 [780]	6 9/16 [167]
800	37 5/8 [956]	39 1/8 [994]	28 [711]	29 7/8 [759]	7 1/2 [191]

ENGINEERING SPECIFICATION:
ZURNZ1170-R
 Acid Resistant Epoxy Coated Recessing receiver equipped with adjustable support brackets and gasketed non-skid cover with removable lift handles. Complete with Z1170 Grease Interceptor. For interceptor specifications see Z1170 specification sheet.

PREFIXES

___ **Z** Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ **-K** Anchor flange 1 3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified.
- ___ **-KC** Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar. A 3 [76] minimum extension height is required when anchor flange (-KC) option is specified.
- ___ **-T** Cover recessed for tile/terrazzo. A 3 [76] minimum extension height is required. (Specify required recess depth - 1/8 [3], 3/4 [19], or 1 1/4 [32]).

REV. B	DATE: 07/13/06	C.N. NO. 95317
DWG. NO. 58906	PRODUCT NO. Z1170-R	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED