


Z1171 LOW PROFILE GREASE INTERCEPTOR

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

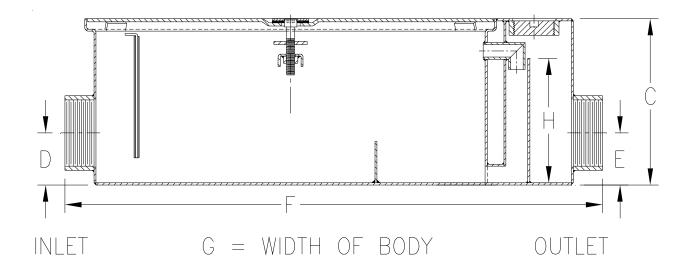

Size	Inlet/ Outlet Size*	Flow Rate	Flow Rate Capacity		Approx.		Dimensions in Inches				
		G.P.M.	Water	Grease	Wt. Lbs.						
		[L]	Gal. [L]	al. [L] Lbs. [kg] ^{[k}	[kg]	С	D/E	F	G	н	
500	3* [76]	20 [76]	15 [60]	40 [18]	102 [46]	10 [254]	3-1/8 [79]	32-3/8 [822]	20-3/4 [527]	6-3/4 [171]	
700		35 [132]	30 [113]	70 [32]	172 [78]	10-3/4 [273]	3-5/16 [84]	43-1/2 [1105]	29 [737]	7 [178]	
800		50 [189]	45 [170]	100 [45]	210 [95]	16 [406]	10 [254]	49-7/8 [1267]	29 [737]	10 [254]	

ENGINEERING SPECIFICATION: ZURNZ1171

Acid Resistant Coated interior and exterior fabricated steel low type grease interceptor, PDI rated at _____ GPM and _ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, and visible double wall trap seal. Gasketed non-skid secured cover, complete with center tie down assembly and Z1108 flow control fitting. Regularly furnished with 3 [76] low inlet and outlet.*

OPTIONS (Check/specify appropriate options)

PREFIXES

- Z
- Acid Resistant Coated Fabricated Steel*
 - ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

_ -L

Angle Type (Z1108-L) Flow Control Device with Plunger. -PW Plug Wrench

Caution: Installations using indirect piping to unit could result in standing water in floor sink or flooding if line blockage occurs.

	REV. K	DATE: 5/1/13	C.N. NO. 128265				
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	PROD. / DWG. NO Z1171						
ZURNINDUOTRICO, LLO, ORCOICIONTION RRAINAGE ORCRATION - 4004 Ritchurch August Frie RA 40544							

ZURN INDUSTRIES, LLC ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514 Phone: 814/455-0921 Fax: 814/454-7929 World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED + 3544 Nashua Drive + Mississauga, Ontario L4V1L2 + Phone: 905/405-8272 Fax: 905/405-1292