




# Z1173 EJECTO-MATIC GREASEPTOR

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

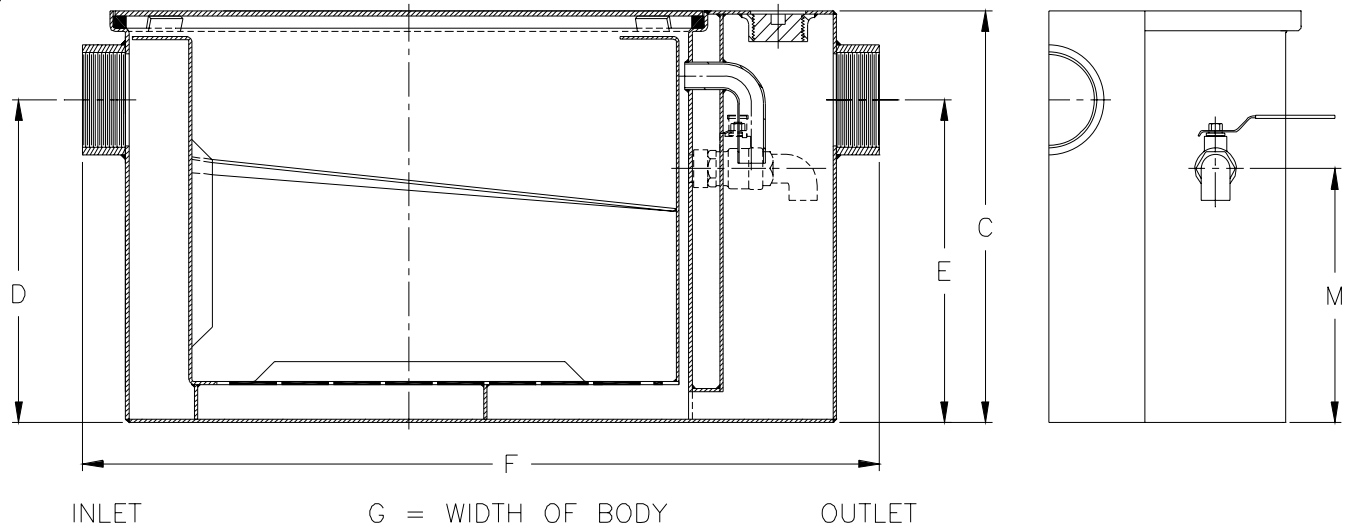

Size	Inlet/ Outlet Size*	Flow Rate G.P.M. [L]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches				M C/L Valve
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G	
200	2 [51]	7 [26]	5 [19]	14 [6]	56 [25]	11-1/4 [286]	8-1/8 [206]	21-3/4 [552]	11-7/8 [302]	6-1/8 [156]
300		10 [38]	6 [23]	20 [9]	70 [32]	11-3/4 [298]	8-1/4 [210]	25-1/8 [638]	14 [356]	5-3/4 [146]
400	3 [76]	15 [57]	10 [38]	30 [14]	87 [39]	13-3/8 [340]	9-3/8 [238]	27-1/8 [689]	16-3/4 [425]	6-7/8 [175]
500		20 [76]	16 [60]	40 [18]	104 [47]	15 [381]	11-3/4 [298]	30 [762]	17-1/4 [438]	9-1/4 [235]
600		25 [94]	21 [79]	50 [23]	129 [59]	17 [432]	12-1/2 [318]	32-1/4 [819]	19-7/8 [505]	9-1/2 [241]
700		35 [132]	30 [113]	70 [32]	156 [71]	18-3/4 [476]	14-1/4 [362]	34-1/8 [867]	22-1/2 [572]	11-1/4 [286]
800		50 [189]	40 [151]	100 [45]	186 [84]	21-1/2 [546]	16 [406]	36 [914]	24-1/2 [622]	13 [330]
900		75 [284]	65 [246]	150 [68]	316 [143]	22-3/4 [578]	18-1/2 [470]	36 [914]	28-5/8 [727]	15-1/2 [394]

**ENGINEERING SPECIFICATION:** ZURN Z1173 Acid Resistant Coated interior and exterior fabricated grease interceptor, PDI rated at \_\_\_\_ GPM and \_\_\_\_ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle and sediment tray and grease retention tray adjacent to grease draw-off valve. Gasketed non-skid secured cover, complete with Z1108 flow control fitting. Regularly furnished with high inlet and outlet connections.\*

**PREFIXES**

- \_\_\_\_ Z Acid Resistant Coated Fabricated Steel\*
- \_\_\_\_ ZS All Type 304 Fabricated Stainless Steel

**SUFFIXES**

- \_\_\_\_ -L Angle type (Z1108-L) flow control device.
- \_\_\_\_ -PW Plug Wrench
- \_\_\_\_ -R Recessing receiver for recessed installation is equipped with adjustable support brackets and gasketed non-skid cover with removable lift handle.
- \_\_\_\_ -RE Recessing receiver enclosed type for recessed installation. Furnished with adjustable support brackets and gasketed non-skid cover with removable lift handles.

- NOTE:**
1. Location of outlet from bottom of interceptor cannot be changed. Draw-off connection regularly furnished on outlet side.
  2. On sizes 200 & 300 only draw-off on lefthand side when facing inlet.
  3. Sizes 200 thru 800 are PDI Certified.

<b>REV. G</b>	<b>DATE: 10/22/10</b>	<b>C.N. NO. 111953</b>
<b>DWG. NO. 58909</b>	<b>PRODUCT NO. Z1173</b>	

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED