



**Z1330-C, Z1333-C and Z1334-C  
Ecolotrol Wall Hydrants  
3/4" Hose Connection**


The information provided is presented in two ways; chart and graph form. Once the hydrant and proper hose connection is established, all of the information can be obtained through the corresponding graph.

Choose a Static Inlet Pressure on the graph. Next draw a vertical line from this point until an intersection is made with the curve. Drawing a horizontal line from this intersection to the left axis will give the corresponding Running Inlet Pressure. The values listed above the curve indicate the Pressure Drop Across the Unit, and the values below the curve list the Flow Rate of the unit.

Note: All data was collected with the hydrant opened to its full capacity.

Example: At a static pressure of 44 psi, it can be found that the running inlet pressure of the unit is approximately 34.6 psi. The flow rate of the unit is between 8.8 and 10.2 gpm (approximately 9.4 gpm) and the pressure drop across the unit is between 28.2 and 34.2 psi (approximately 30.6 psi).

**Z1330-C, Z1333-C, Z1334-C  
Ecolotrol  
Wall Hydrants**

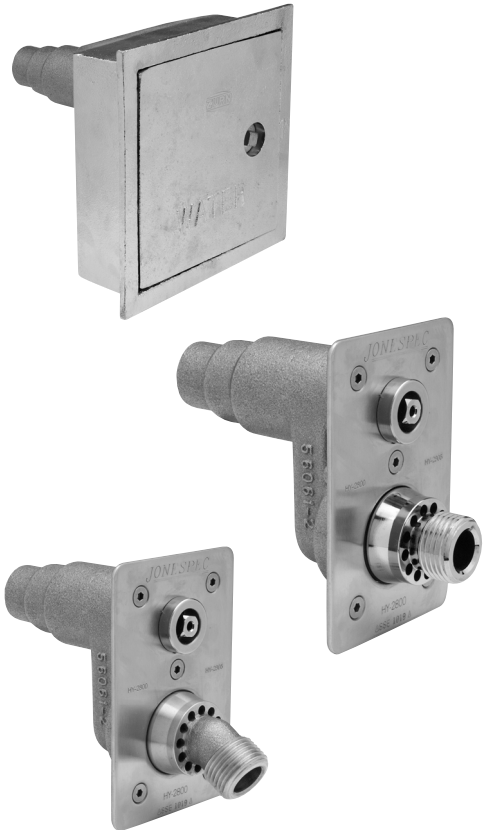

<b>Z1330-C, Z1333-C, Z1334-C Ecolotrol Wall Hydrant – 3/4" Hose Connection</b>				
Static Pressure (psi)	Running Inlet Pressure (psi)	Running Outlet Pressure (psi)	Flow Rate (gpm)	Pressure Drop Across Unit (psi)
10	5.6	0.1	4.1	5.5
20	14.7	1.0	6.2	13.7
30	22.8	2.6	7.6	20.2
40	31.7	3.5	8.8	28.2
50	38.9	4.7	10.2	34.2
60	44.4	5.2	10.9	39.2
70	57.6	7.0	12.7	50.6
80	66.0	8.2	13.7	57.8
90	72.1	8.9	14.1	63.2

