


Z1333XL

ECOLOTROL CERAMIC DISC WALL HYDRANT

Exposed, Anti-Siphon, Automatic Draining, Moderate Climate

SPECIFI	CATION SHEET
$T \wedge C$	

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

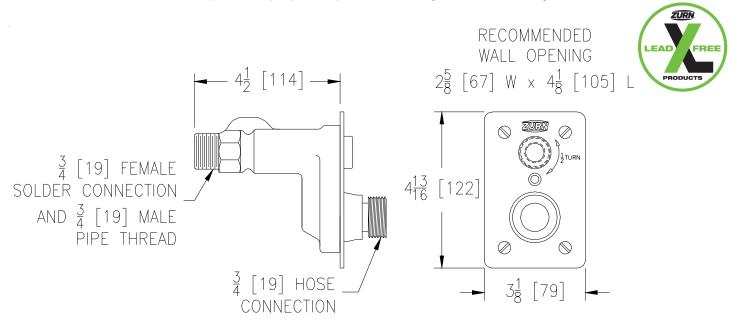


Wall	Approx.
Thickness	Wt.
in [mm]	lbs [kg]
6 [152]	3[1]

ENGINEERING SPECIFICATION: ZURN Z1333XL

Exposed, EcolotrolTM, lead-free, anti-siphon, moderate / interior wall hydrant for flush installation. Hydrant features integral backflow preventer with anti-siphon technology, all-bronze interior components with 1/2 turn long-life ceramic disc cartridge, combination 3/4" [19] female solder and 3/4" [19] male pipe thread inlet connection, and 3/4" [19] male hose connection. Hydrant furnished with type 304 stainless steel faceplate and includes operating key.

Zurn "XL" Lead-Free compliant products are a line of durable plumbing products designed and manufactured to comply with state laws and local codes that mandate maximum allowable lead content levels. Zurn "XL" products are manufactured in accordance to the Federal SWDA section 1417.

2

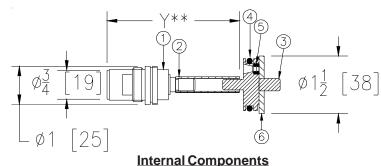

OPTIONS (Check/specify appropriate options)

SUFFIXES -PB Polished Bronze Face Hydrant Parts Repair Kit -RK -RT12 Ceramic Cartridge Removal Tool (up to 12 [305] wall)

3/4 [19] 90° Solder Inlet Elbow -34EL -34FIP 3/4 [19] IP Straight Female Inlet Adapter **Item Name** Quan. Ceramic Cartridge 1 Operating Tube Operating Coupling

3 4 O-Ring 5 1 O-Ring Retaining Washer

** When ordering replacement cartridge assembly Specify Y dim.

Zurn Industries, LLC | Specification Drainage Operation 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929 In Canada | Zurn Industries Limited 3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292 www.zurn.com

Rev. Date: 4/23/15 C.N. No. 131802

Prod. | Dwg. No. Z1333XL

^{*} Regularly furnished unless otherwise specified.