


Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

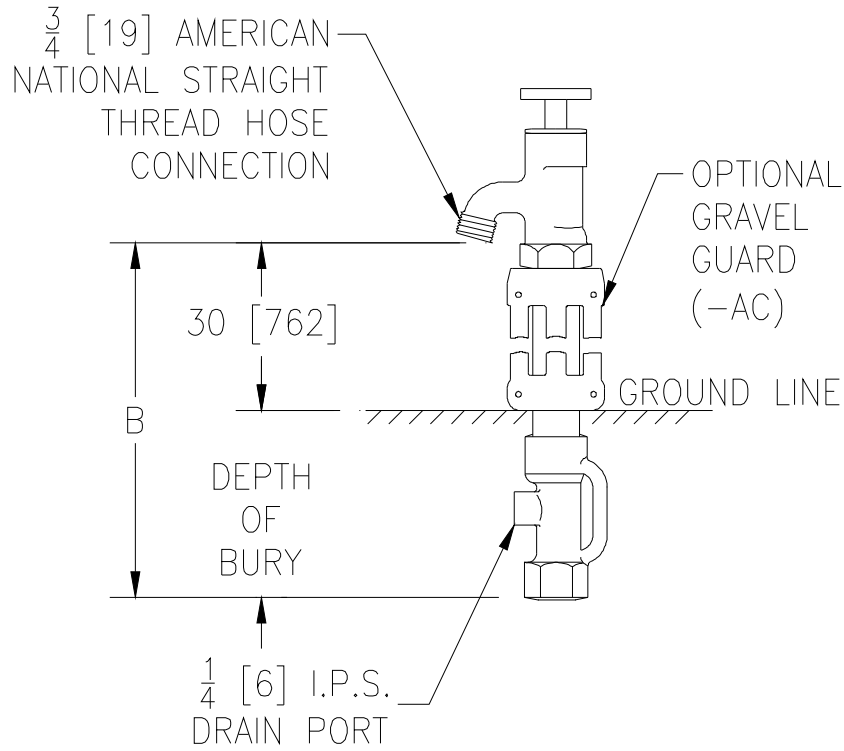

Depth of Bury in Feet [mm]	B Feet [mm]	Approx. Wt. Lbs. [kg]
2 [610]	4 1/2 [1372]	25 [11]
3 [914]	5 1/2 [1676]	29 [13]
4 [1219]	6 1/2 [1981]	33 [15]
5 [1524]	7 1/2 [2286]	37 [17]
6 [1829]	8 1/2 [2591]	41 [19]
7 [2134]	9 1/2 [2896]	45 [20]
8 [2438]	10 1/2 [3200]	49 [22]

ENGINEERING SPECIFICATION: Z1391 Exposed, non-freeze post hydrant, complete with bronze casing, all bronze interior parts, bronze seat, replaceable seat washer, and non-turning operating rod with free-floating compression closure valve and 3/4 [19] connection. Operating key included. Hydrant is equipped with a tapped 1/4 [6] drain port in valve housing.

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ___ -AC Aluminum Casing Guard
- ___ -HG Hydrant Guard
- ___ -VB External Vacuum Breaker
- ___ -WH Wheel Handle