


Z1454 ADJUSTABLE FLOOR CLEANOUT W/ FLASHING FLANGE

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

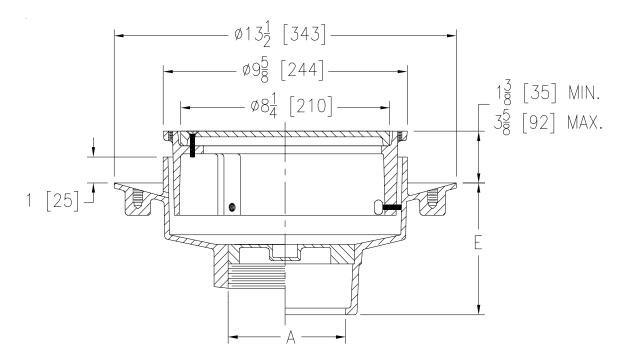

A Pipe Size Inches	Approx. Wt. Lbs [kg]	
2-3 [51-76]	33 [15]	
4 [102]	34 [15]	

ENGINEERING SPECIFICATION: ZURN Z1454

Adjustable Floor cleanout, Dura-Coated cast iron body, gas and watertight ABS tapered thread plug, and round scoriated Dura-Coated cast iron adjustable top complete with membrane flashing flange.

OPTIONS (Check/specify appropriate options)

PIPESIZE	(Specify size/type) OUTLET	'E' DIM
2-3-4[51-76-102]	IC Inside Caulk	5-1/4 [133]
2-3-4[51-76-102]	IP Threaded	4-1/4 [108]

PREFIXES

- Ζ Dura-Coated Cast Iron.*
 - D.C.C.I. with Polished Bronze Scoriated Top (Add 3/16 [5] to 1-3/8 [35] Min.- 3-5/8 [92] Max.) ZΒ
 - ΖN D.C.C.I. with Polished Nickel Bronze Scoriated Top (Add 3/16 [5] to 1-3/8 [35] Min.- 3-5/8 [92] Max.)

SUFFIXES

- Raised Head Plug -A
- -C Clamp Collar
- -DC DuresistCover
- Galvanized Cast Iron -G
- -TS **Top Secured with Slotted Screws**
- Vandal-Proof Secured Top -VP

	REV. F	DATE: 11/05/10) C.N. NO. 120262		
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	DWG. NO.	58771	PRODUCT NO. Z1454		
ZURN INDUSTRIES LLC & SPECIFICATION DRAINAGE OPERATION & 1801 Pittsburgh Ave & Frie PA 16514					

Phone: 814/455-0921 Fax: 814/454-7929 World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED + 3544 Nashua Drive + Mississauga, Ontario L4V1L2 + Phone: 905/405-8272 Fax: 905/405-1292