


## TYPICAL INSTALLATION Z160 135° SCUPPER DRAIN

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

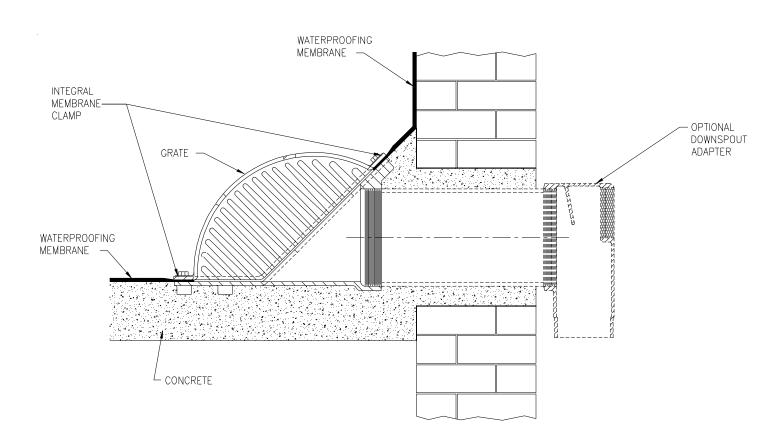

## Z160 SCUPPER DRAIN

Drain is illustrated with regularly furnished plain bronze grate with integral membrane clamp. The Zurn scupper drain can be installed in most roof construction. Dimensional data is shown in the Engineering Handbook and on the Zurn submittal drawings. The drain body is secured to the pipe by a threaded connection. The waterproofing membrane is to run up to and over the clamping flange area. The grate with integral membrane clamp is then placed on the drain and then secured. The design and method used for the installation of roofing materials is by others. For other available scupper drains, see Z161, Z187 & Z189.

Form # RD97 Date: 12/04/12 C.N. No. 128549 Rev.