




Z1726

ADJUSTABLE FLOOR DRAIN MEDIUM DUTY

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

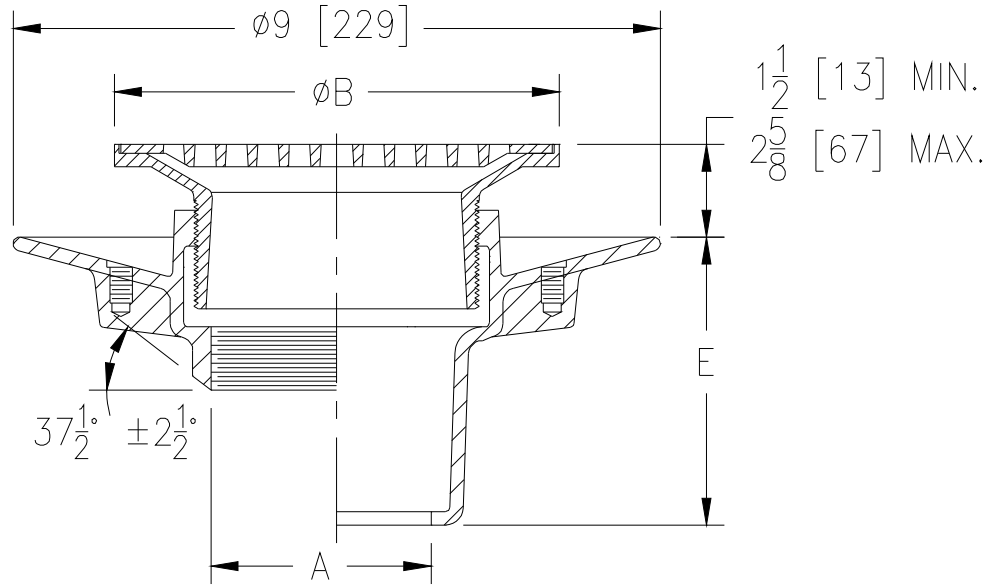

Dimensions In Inches		Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm ²]
A Pipe Size	B Strainer Dia.		
2-3 [51-76]	5 [127]	13 [6]	7 [45]
2-3-4 [51-76-102]	6 [152]	13 [6]	11 [71]
2-3-4 [51-76-102]	7 [178]	14 [6]	15 [97]
3-4-6 [76-102-152]	8 [203]	16 [7]	20 [129]
6 [152]	10 [254]	19 [9]	27 [174]

ENGINEERING SPECIFICATION: ZURN Z1726

All Type 304 (CF8) stainless steel adjustable floor drain with anchor flange (clamp collar with seepage holes, when specified), and 6 [152] diameter medium-duty vertically adjustable, satin finish top.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2 thru 4, 6 [51 thru 102, 152]

2 thru 4 [51 thru 102]

2 thru 4 [51 thru 102]

(Specify size/type) **OUTLET**

___ BW Butt-weld
(Specify Schedule 10, 40 or 80)

___ IC Inside Caulk

___ IP Threaded

'E' BODY HT. DIM.

2-7/8 [73]

4-3/8 [111]

2-7/8 [73]

PREFIXES

- ___ Z Type 304 (CF8) Stainless Steel Body*
- ___ ZM Type 316 (CF8M) Stainless Steel Body
- ___ ZL Type 316L (CF3M) Stainless Steel Body

SUFFIXES

- ___ -K Seepage Holes Only
- ___ -KC Clamp Collar with Seepage Holes
- ___ -RD5 5 [127] Diameter Type 304 Stainless Steel Top
- ___ -RD7 7 [178] Diameter Type 304 Stainless Steel Top
- ___ -RD8 8 [203] Diameter Type 304 Stainless Steel Top
- ___ -RD10 10 [254] Diameter Type 304 Stainless Steel Top
- ___ -SG Solid Gasketed Cover
- ___ -V Bronze Backwater Valve
- ___ -VP Vandal-Proof Secured Top
- ___ -Y Stainless Steel Sediment Bucket

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. J	DATE: 11/15/10	C.N. NO. 120389
DWG. NO. 59294	PRODUCT NO. Z1726	

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292