




# Z451

## SHALLOW TRAP DRAIN W/ "TYPE B" STRAINER

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

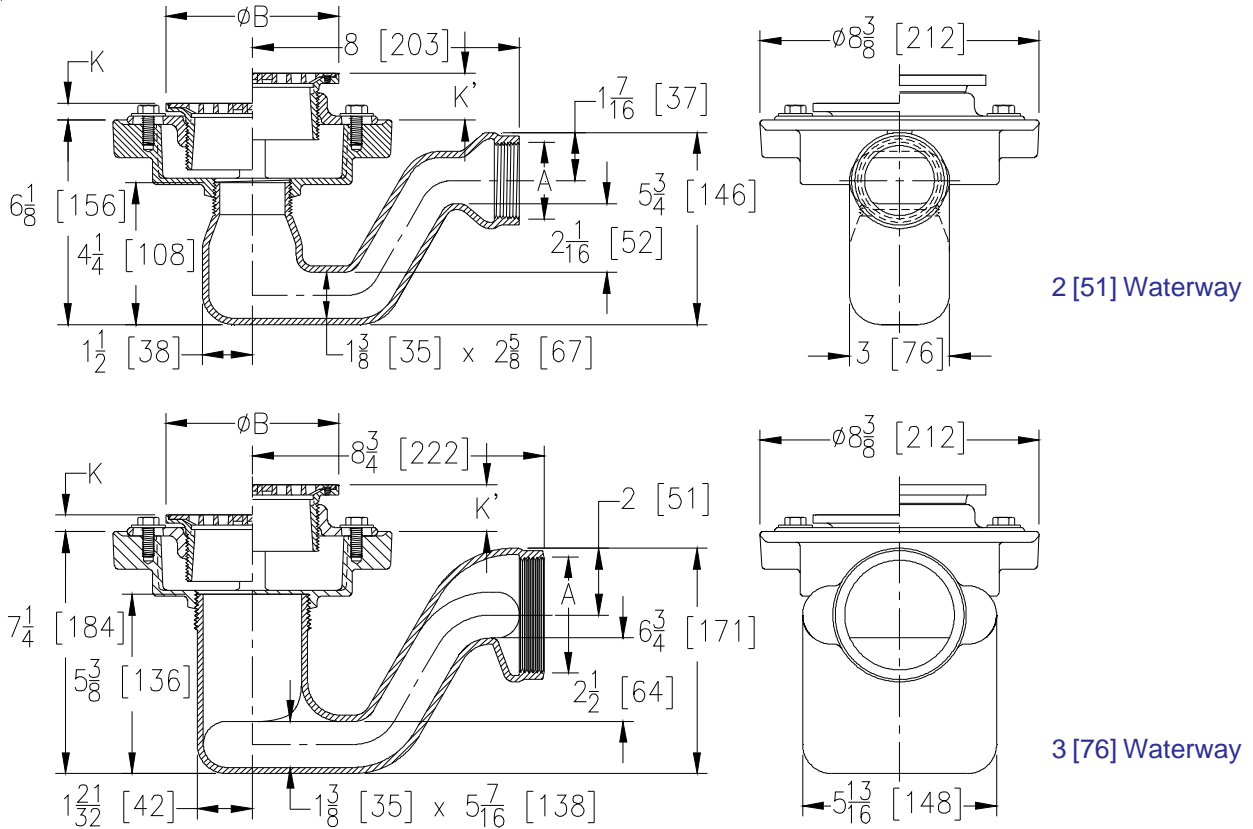

2 [51] Waterway

3 [76] Waterway

Dimensions In Inches						Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm <sup>2</sup> ]
A Pipe Size	Strainer Dia.	K		K'			
		Min.	Max.	Min.	Max.		
2-3 [51-76]	5 [127]	1 [25]	1-1/2 [38]	1-3/32 [28]	2-1/4 [57]	15 [7]	8 [52]
2-3 [51-76]	6 [152]	1 [25]	1-25/32 [45]	1-13/32 [36]	2-17/32 [64]	18 [8]	9 [58]
2-3 [51-76]	7 [178]	1 [25]	2-1/8 [54]	1-23/32 [44]	2-7/8 [73]	20 [9]	12 [77]
3 [51]	8 [203]	1-5/32 [30]	2-1/8 [54]	1-3/4 [44]	2-7/8 [73]	21 [10]	18 [116]

**ENGINEERING SPECIFICATION:**  
ZURN ZN451

Shallow trap floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots, adjustable "TYPE B" polished, nickel bronze heel-proof strainer and cast iron shallow trap body with 2 or 3 [51 or 76] waterway and threaded side outlet.

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE** 2-3 [51-76] (Specify size) **OUTLET** \_\_\_\_\_ IP Threaded

**PREFIXES**  
 \_\_\_\_\_ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top  
 \_\_\_\_\_ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top\*

**SUFFIXES**

_____ -AR Acid Resisting Epoxy Coated Cast Iron	_____ -PC Protective Cover
_____ -CP Chrome-Plated Bronze Top	_____ -U 1-3 [25-76] High Extension Adapter
_____ -DP Decorative Polished Top	_____ -V Backwater Valve
_____ -G Galvanized Cast Iron	_____ -VP Vandal-Proof Secured Top
_____ -HD Heavy-Duty Slotted Grate (ZN only)	_____ -Y Sediment Bucket
_____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])	_____ -18 Leveling Ring (See Z400-18)

\* Regularly furnished unless otherwise specified.