




Z540

12 [305] MEDIUM-DUTY DRAIN W/ SUR-SET BUCKET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

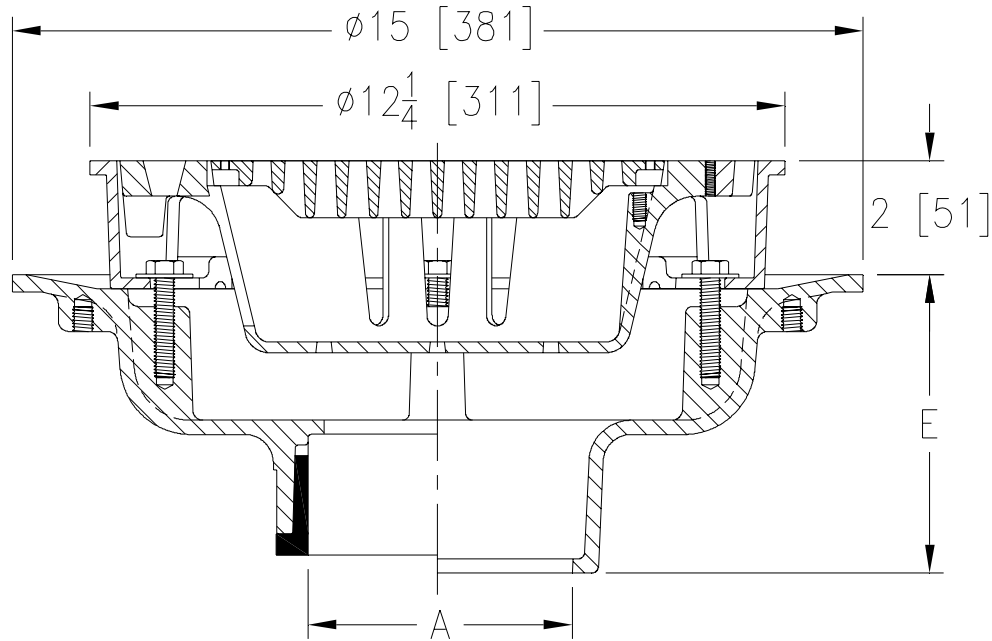

A Pipe Size In.	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2,3,4 [51,76,102]	44 [16]	18 [116]
5,6 [127,152]	45 [17]	
8, 10 [203, 254]	46 [17]	

ENGINEERING SPECIFICATION: ZURN Z540

12 [305] Diameter top drain, Dura-Coated cast iron body with bottom outlet, seepage pan and combination membrane flashing clamp and frame for Sur-Set bucket and medium-duty slotted grate.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2 thru 6,8, 10 [51 thru 152,203, 254]
- 2 thru 4,6 [51 thru 102,152]
- 2 thru 6,8,10 [51 thru 152,203,254]
- 2 thru 6,8, 10 [51 thru 152,203, 254]
- 2,3,4 [51,76,102]

(Specify size/type) **OUTLET**

- _____ IC Inside Caulk
- _____ IG Inside Gasket
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

'E' BODY HT. DIM.

- 5-1/4 [133]
- 5-1/4 [133]
- 3-3/4 [95]
- 5-1/4 [133]
- 4-5/8 [117]

PREFIXES

- _____ Z D.C.C.I. Body and Top*
- _____ ZB D.C.C.I. Body with Polished Bronze Top (Add 3/16 [5] to 2 [51] Dim. and 3/4 [20] to 12-1/4 [311] dim.)
- _____ ZN D.C.C.I. Body with Polished Nickel Bronze Top (Add 3/16 [5] to 2 [51] Dim. and 3/4 [20] to 12-1/4 [311] dim.)

SUFFIXES

- | | |
|---|---|
| <ul style="list-style-type: none"> _____ -DG Duresist Grate _____ -G Galvanized Cast Iron _____ -H Hinged Grate _____ -P Trap Primer Connection _____ -SA Stabilizer Assembly (See Z1036) _____ -SS Stainless Mesh Liner for Bucket _____ -TC Neo-Loc Test Cap Gasket
(2 [51]-4 [102] NL Bottom Outlet Only) | <ul style="list-style-type: none"> _____ -TS Top Secured with Slotted
Screws _____ -V Backwater Valve (See Z1099) _____ -VP Vandal-Proof Secured Top _____ -90 90° Side Outlet Body |
|---|---|

REV. H	DATE: 11/22/10	C.N. NO. 120471
DWG. NO. 58943	PRODUCT NO. Z540	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED