




Z610-86
13-3/16 [355] SQUARE TOP HEAVY-DUTY DRAIN
WITH HEEL PROOF GRATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

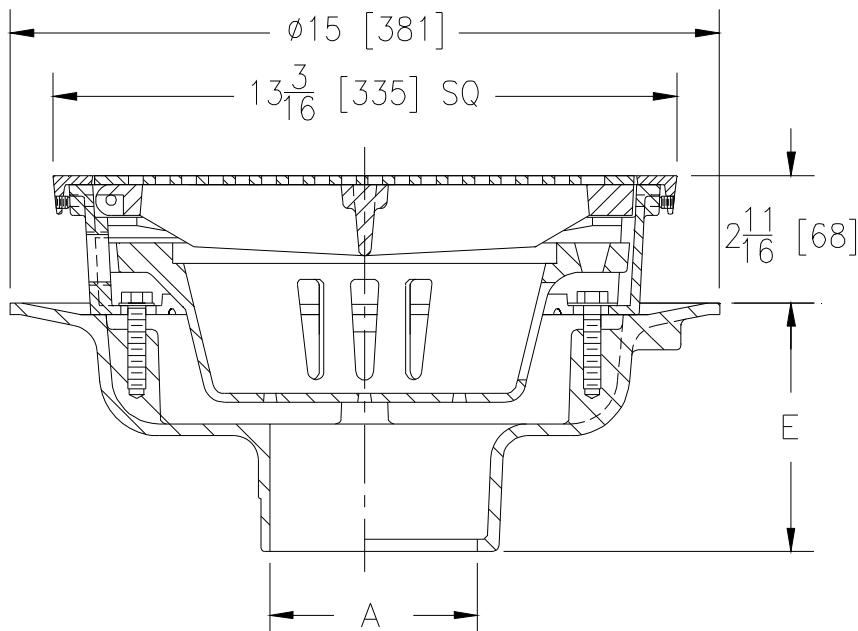

A Pipe Size In.	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2-3-4-5-6 [51-76-102-127-152]	54 [24]	21 [135]
8-10 [203-250]	56 [25]	

ENGINEERING SPECIFICATION: ZURN Z610-86

13-3/16 [355] Square top drain, Dura-Coated cast iron body with bottom outlet, seepage pan and combination membrane flashing clamp and frame for heavy duty cast iron hinged slotted grate, veneer frame, heel-proof veneer grate, and suspended sediment bucket.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2 thru 6, 8, 10 [51 thru 152, 203, 250]
2 thru 4, 6 [51 thru 102, 152]
2 thru 6, 8, 10 [51 thru 152, 203, 250]
2 thru 6, 8, 10 [51 thru 152, 203, 250]
2 thru 4 [51 thru 102]
5,6 [127,152]

(Specify size/type) **OUTLET**

_____ IC Inside Caulk
_____ IG Inside Caulk w/Sealtrol Gskt.
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc
_____ NL Neo-Loc

'E' BODY HT. DIM.

5-1/4 [133]
5-1/4 [133]
3-3/4 [95]
5-1/4 [133]
4-5/8 [117]
5-1/2 [140]

PREFIXES

_____ ZN D.C.C.I Body w/ Polished Nickel Bronze Top*
_____ ZS D.C.C.I Body w/ Stainless Steel Top

SUFFIXES

_____ -AR Acid Resisting Epoxy Coated Cast Iron
_____ -DX Dex-O-tex Flange
_____ -G Galvanized Cast Iron
_____ -LY (Less) Bucket
_____ -P Trap Primer Connection
_____ -S Secondary Strainer
_____ -TS Top Secured with Slotted Screws
_____ -V Backwater Valve (See Z-1099)

_____ -VP Vandal Proof Secured Top
_____ -YA Aluminum Sediment Bucket
_____ -90 90° Threaded Side Outlet Body

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. C DATE: 7/22/10 C.N. NO. 111423

DWG. NO. P-14241 PRODUCT NO. Z610-86

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292