

AquaSense® TAG _____

Z6922

AquaSense Back Mount Battery Powered Faucet



Engineering Specification

ADA compliant, battery powered, chrome plated sensor faucet for retrofit and new construction.

- > Flow Rate
 - 1.5 gpm Vandal Resistant Laminar Flow
- Occupant Detection Infrared convergence-type proximity sensor Thirty Second Time out feature
- Spout module Chrome Plated Cast Brass
- Also Includes
 In-line filter
 4 "AA" batteries
 Inlet for a 1/2"[13] ball riser
 Single supply hose

Flow Control Options

- □ **-E** 1.5 gpm/ 5.7 Lpm Vandal-Resistant Aerator
- □ -F 0.5 gpm/1.9 Lpm Vandal-Resistant Non-Aerated
- □ -K 1.0 gpm/ 3.8 Lpm Vandal-Resistant Laminar Flow
- □ -L 1.0 gpm/ 3.8 Lpm Vandal-Resistant Aerator
- □ -M 0.35 gpm/1.3 Lpm Vandal-Resistant Non-Aerated

Power Supply Choices (Sold Separately)

- □-ACA 6 VDC Plug-In Power Converter
- □ -HW6 Hardwired Power Converter

Optional Power Supply Accessories

- □ -CWB Connector Wire for Hardwire Install
- □ -MJ Mini Junction Box

NOTE: For Hardwire applications furnish P6000-HW6 power converter. Order P6000-HW6 power converter seperately.

The P6000-HW6 and P6000-MJ will power up to 8 sensor faucets.

ZURN INDUSTRIES, LLC. ◆ COMMERCIAL BRASS OPERATION 5900 ELWIN BUCHANAN DRIVE ◆ SANFORD NC 27330 Phone: 1-800-997-3876 ◆ Fax: 919-775-3541

www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED

3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2

Phone: 905-405-8272 Fax: 905-405-1292

Accessories

□-CG	CareGuard Aerator
□-DSA	Drug Screening Applications
□ -GA	3-1/2" Gooseneck Spout
□-GC	8" Gooseneck Spout
□ -MT	Mixing Tee
□ -MV	Temperature Mixing Valve
□ -SH	Supply Hoses for Mixing Valve
□ -SO	Rosette Spray Aerator
□ -TMV	Thermostatic Mixing Valve for Multiple
	Faucets
□ -TMV-1	Thermostatic Mixing Valve for Single
	Faucets
□ - XT	Extended Range, Less Timeout
□	Other

Careguard currently only available with -E, 1.5 Vandal Resistant Laminar Aerator.

Architectura	l/Engineering	Approval


The information contained in this document is subject to change without notice.

Please contact Zurn for most up to date information.


Rev. J


TYPICAL Z6922

AquaSense Battery Powered Faucet

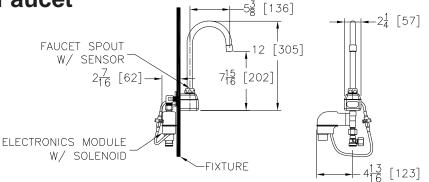


TYPICAL Z6922-ACA AquaSense Plug-In Powered Faucet

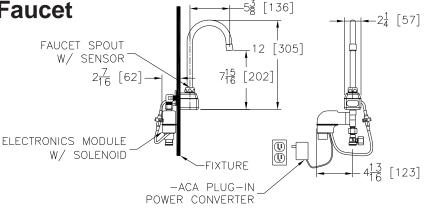

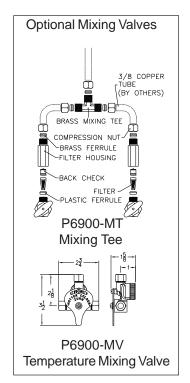

TYPICAL Z6922-CWB

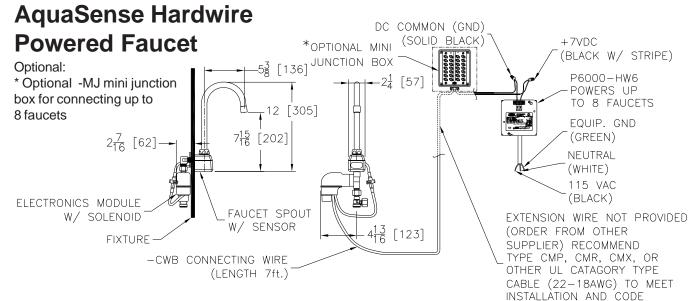

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6000-PC6 PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.

REQUIREMENTS.