


SINGLE CONTROL FAUCET Z824B0

$T \wedge \bigcirc$	
IA(¬	
1710	



Engineering Specification: Zurn AquaSpec® Z824B0

Polished chrome plated cast brass single control faucet with a side 5 3/8" [137mm] centerline rigid or swing gooseneck spout, a ceramic disc cartridge and a temperature limit stop. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (Complying with ANSI A112.18.1 Standard for flow), a metal ADA compliant lever handle, stainless steel flex connection hoses and mounting hardware.

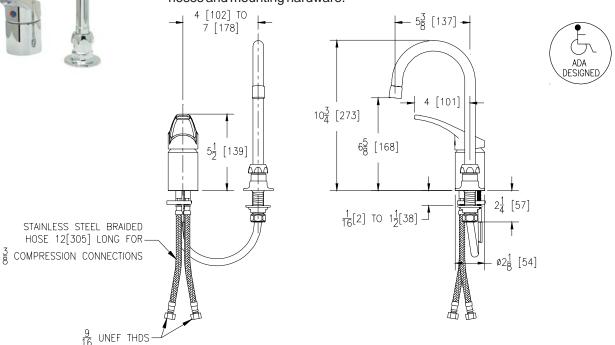

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

Suffix	Description
CST	Copper Supply Tubes
FC	2.0 GPM [7.6L] Laminar Flow Control in Base of Spout
HS	Hose and Spray
2F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator
3F	0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Spray Outlet
4F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet
-2F -3F -4F -5F	2.0 GPM [7.6 L] Female Spray Outlet
7F	1.0 GPM [3.8L] Pressure Compensating Female Spray Outlet
-7F -11F -15F	Female Threaded Single Screen Outlet
15F	Female Full Flow Outlet
16F	1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Female Spray Outlet
17F	1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Aerator
18F	1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet
18FH	18" [457mm] S.S. Braided Flex Hose
19F	1.5 GPM [5.7 L] Anti-Microbial Pressure Compensating Female Laminar Flow Outlet
21F	1.0 GPM [3.8L] Pressure Compensating Female Laminar Flow Outlet
22F	1.0 GPM [3.8L] Pressure Compensating Vandal-Resistant Female Laminar Flow Outlet
23F	1.5 GPM [5.7L] Pressure Compensating Female Aerator
140	140° Restricted Swing Gooseneck Spout

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733
Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com

Date: 10/5/10