


Fire Rated Grease Duct Access Doors

- UL Listed
- Unique Patented Design
 - Easy Installation
 - No Welding Required



Flame Gard®

- Gasket rated to 2300 F° for fire tight seal
- Gasket is high-temp bonded to front panel
- Heavy-duty 16 gauge steel construction
 - Stainless Steel model available
- Available with extended studs to accommodate fire wrap for curved and flat duct applications
- Positive bolt pattern ensures fire-safe closure
 - Back frame reinforces duct cut-out
 - Easy to clean and easy to install
 - No minimum order requirements
- Standard and custom sizes available

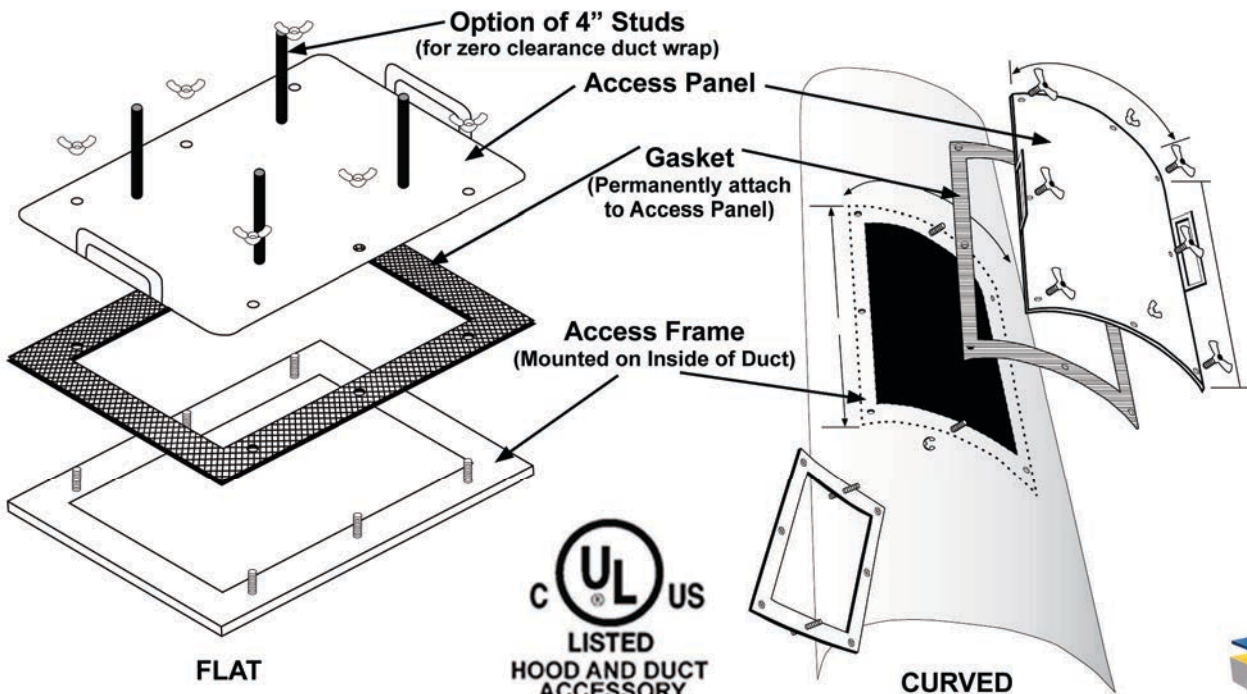


LISTED
HOOD AND DUCT
ACCESSORY
3RS9
File No. MH19744
NFPA #96


COMPONENT
HARDWARE