

Location: \_\_\_\_\_




**F1100-AS**

## FLOOR DRAIN WITH ANGLE STRAINER FOR NON-MEMBRANE FLOOR AREAS

**Specification:** MIFAB Series F1100-AS-1 lacquered cast iron floor drain with anchor flange, weepholes, and "AS" angle satin finished nickel bronze strainer with vandal resistant stainless steel allen key screws. (For non-membrane floors, use MIFAB F1100-AS Series.)

**Function:** Used in showers, kitchens, restrooms, and other non-membrane finished areas where the drain is installed at the floor and wall junction. The vertical grate openings allow water to continue to drain if the horizontal grate openings become clogged.

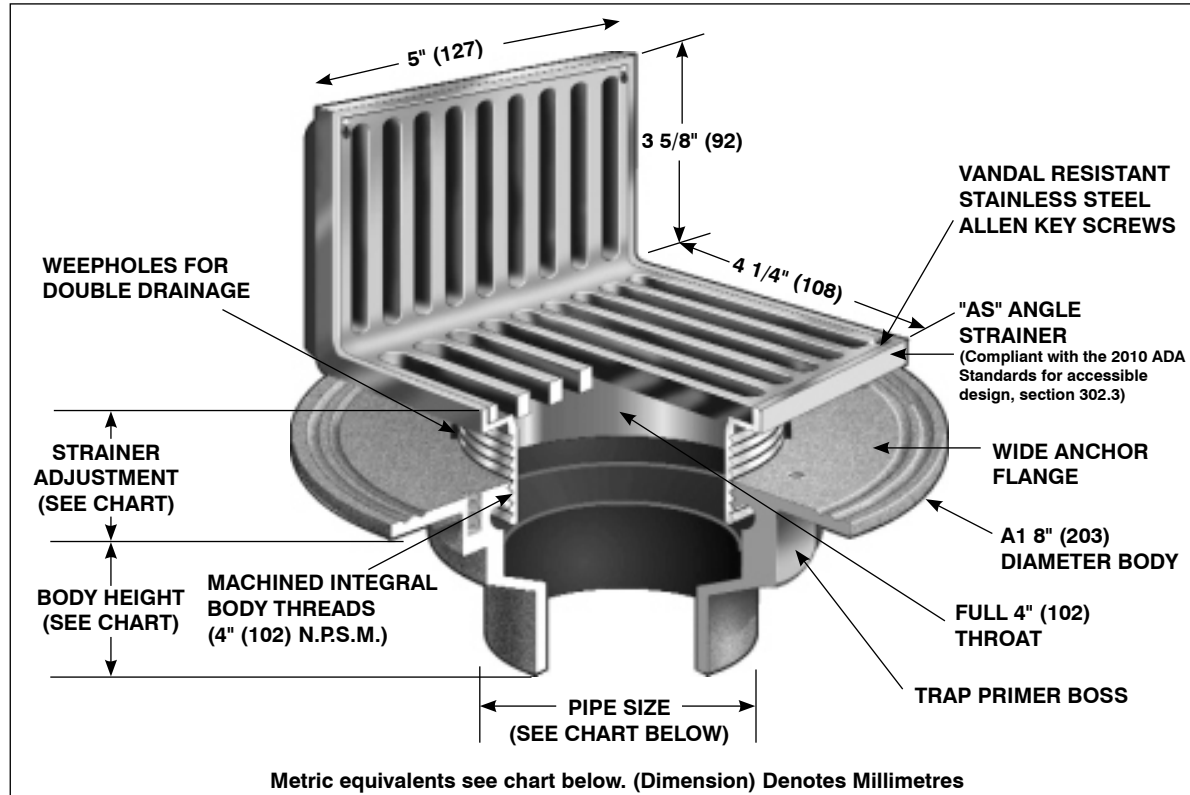

### PARTS:



A1 BODY



AS-1

F1100-AS Series meets  
ANSI-ASME floor  
drain standard  
A112.6.3-2001

STRAINER SIZE	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
	MIN	MAX	FREE AREA	LOAD RATING		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
4" x 5" x 4" (102) x (127) x (102)	1/2" (13)	1 5/8" (41)	30.0 in <sup>2</sup> (19354 <sup>2</sup> )	UP TO 2,000 LBS.	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
					3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					5" (127)	3" (76)	--	2 5/8" (67)	3 3/4" (95)	--
					6" (152)	3 1/4" (83)	6 1/2" (165)	--	--	--

#### SUFFIX OPTIONAL VARIATIONS

- 1 Nickel bronze strainer (standard)
- 5 Sediment bucket
- 6 Security screws (T-20 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 13 Galvanized body
- 15 Extension
- 21 Secondary flat stainless steel strainer (2", 3", 4")
- 28 Stainless steel body (Type 304)
- 30 PVC socket connection body
- 31 ABS socket connection body

#### SUFFIX OPTIONAL VARIATIONS

- 34 Closure plug
- 40 Underdeck clamp
- 41 Sump receiver
- 49 Chrome plated strainer
- 90 Threaded side outlet (2", 3", 4") (cast iron only)
- 90NH No hub side outlet (2", 3", 4") (cast iron only)
- 95 Client logo
- BA Buy American Act compliant product

#### SUFFIX OPTIONAL VARIATIONS

- C Membrane clamp for low rough-in (min. 1/2" (13))
- C2 High rough-in membrane clamp (min. 1 9/16" (40))
- (Standard) No hub outlet
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4")
- X Inside caulk outlet
- Z Extended wide elastomeric flange

Job Name: \_\_\_\_\_  
Section No: \_\_\_\_\_  
Schedule No: \_\_\_\_\_

Page No: \_\_\_\_\_  
Contract: \_\_\_\_\_  
Purchase Order No: \_\_\_\_\_

MIFAB reserves the right to make changes in material and design without formal notice or obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880