

Location: _____




F1100-C-DD

HUB DRAIN FOR MEMBRANE FLOOR AREAS

Specification: MIFAB Series F1100-C-DD lacquered cast iron hub drain with anchor flange, cast iron membrane clamp ring with primary and secondary weepholes for waterproofing membrane, and standard (specify material finish) indirect waste hub. (For non-membrane floors, use MIFAB F1100-DD Series.)

Function: Used in restaurants, hospitals, industrial laboratories, and other membrane finished areas where indirect waste lines above the floor drip condensate or waste water into the hub. Membrane clamp is provided to secure the waterproofing membrane.

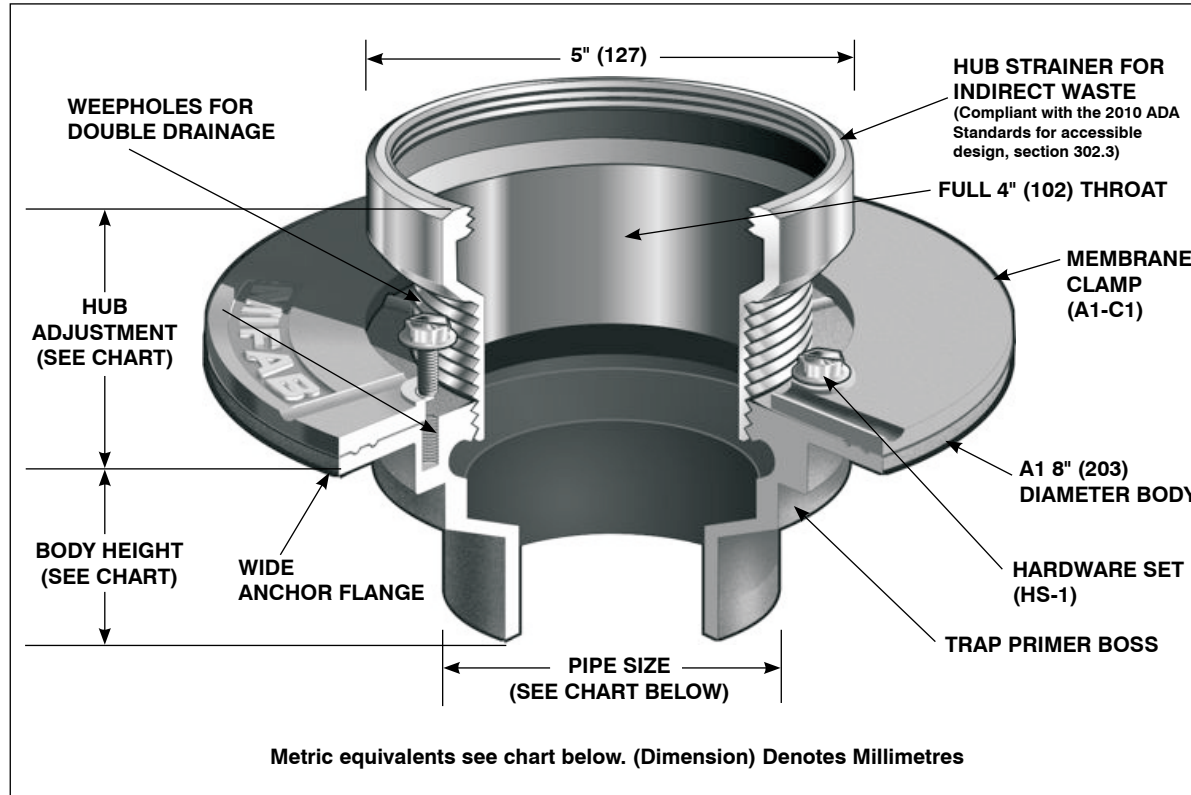

PARTS:



A1 BODY



DD-(*)
(*) Denotes strainer finish (-1, -3 or -50)



A1-C1



HS-1

F1100-C-DD Series meets
ANSI-ASME floor
drain standard
A112.6.3-2001

HUB ADJUSTMENT		PIPE SIZE	BODY HEIGHT				
			NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
1 1/2" (38)	2 5/8" (66)	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
		3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
		4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
		5" (127)	3" (76)	--	2 5/8" (67)	3 3/4" (95)	--
		6" (152)	3 1/4" (83)	6 1/2" (165)	--	--	--

SUFFIX OPTIONAL VARIATIONS

- 1 Nickel bronze strainer (standard)
- 3 Stainless steel strainer
- 5 Sediment bucket
- 6 Security screws (T-20 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 13 Galvanized body
- 15 Extension
- 21 Secondary flat stainless steel strainer (2", 3", 4")
- 28 Stainless steel body (Type 304)
- 30 PVC socket connection body

SUFFIX OPTIONAL VARIATIONS

- 31 ABS socket connection body
- 34 Closure plug
- 40 Underdeck clamp
- 41 Sump receiver
- 49 Chrome plated strainer
- 90 Threaded side outlet (2", 3", 4") (cast iron only)
- 90NH No hub side outlet (2", 3", 4") (cast iron only)
- 95 Client logo

SUFFIX OPTIONAL VARIATIONS

- BA Buy American Act compliant product
- C2 High rough-in membrane clamp (min. 1 9/16" (40))
- (Standard) No hub outlet
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4")
- X Inside caulk outlet
- Z Extended wide elastomeric flange

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contract: _____
Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice or obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880