

Location: _____




F1100-T

**FLOOR DRAIN WITH SPANNER WRENCH COVER
FOR NON-MEMBRANE FLOOR AREAS**

Specification: MIFAB Series F1100-T(*)-3 (* specify strainer diameter) lacquered cast iron floor drain with anchor flange, weepholes, and heavy duty, solid, gas tight, spanner wrench, vandal proof, stainless steel cover for secure access. (For membrane floors, use MIFAB F1100-C-T Series.)

Function: Used in non-membrane finished areas where irregular drain use is required. Solid, gas tight, spanner wrench, vandal proof, stainless steel cover ensures secure access. Used for all types of poured finished floors.

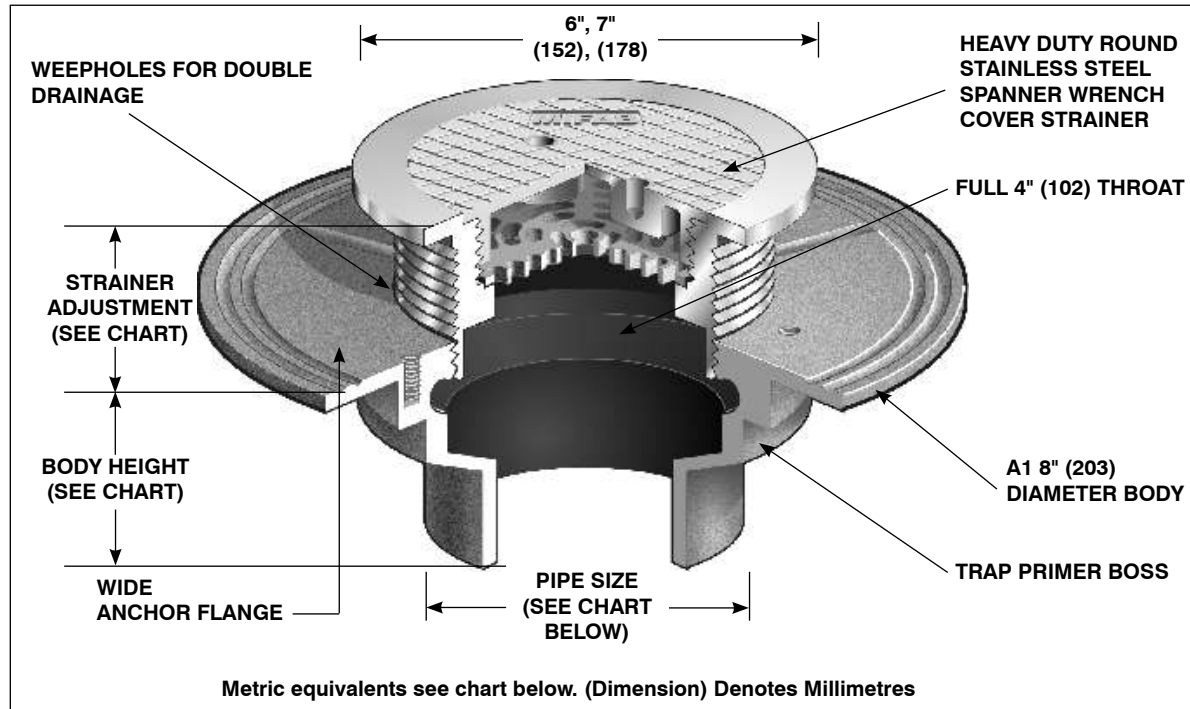

PARTS:



A1 BODY



T(*)-3
(*) Denotes Strainer
Size (6" or 7"
Diameter)

F1100-T Series meets
ANSI-ASME floor
drain standard
A112.6.3-2001

| STRAINER SIZE | STRAINER ADJUSTMENT | | ANSI/ASME RATING | | PIPE SIZE | BODY HEIGHT | | | | |
|------------------|------------------------|--------------|--|--------------------------|----------------------------------|-----------------------------------|-----------------------------------|----------------------------------|----------------------------------|------------------------------|
| | | | FREE AREA | LOAD RATING S.S. (-3) | | NO HUB (STANDARD) | PUSH ON (P) | THREADED (T) | INSIDE CAULK (X) | PVC/ABS (-30)/(-31) |
| 6" (152) | 11/16" (17) | 1 1/2" (38) | 9 in ² (5800 ²) | 5000 to 7499 LBS. | 2" (51) 3" (76) | 3" (76) 3" (76) | 3 3/8" (86) 3 3/8" (86) | 2 1/4" (57) 2 5/8" (67) | 3 3/4" (95) 3 3/4" (95) | 2 15/16" (75) 3 3/4" (95) |
| 7" (178) | 9/16" (14) | 1 9/16" (40) | 12 in ² (7700 ²) | 5000 to 7499 LBS. | 4" (102) 5" (127) 6" (152) | 3" (76) 3" (76) 3 1/4" (83) | 3 3/8" (86) -- 6 1/2" (165) | 2 5/8" (67) 2 5/8" (67) -- | 3 3/4" (95) 3 3/4" (95) -- | 3 3/4" (95) -- -- |

SUFFIX OPTIONAL VARIATIONS

- 3 Stainless steel strainer (standard)
- 5 Sediment bucket
- 6 Security screws (T-20 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 12 Galvanized top assembly
- 13 Galvanized body
- 15 Extension
- 21 Secondary flat stainless steel strainer (2", 3", 4")
- 28 Stainless steel body (Type 304)
- 30 PVC socket connection body
- 31 ABS socket connection body

SUFFIX OPTIONAL VARIATIONS

- 34 Closure plug
- 40 Underdeck clamp
- 41 Sump receiver
- 49 Chrome Plated Strainer Assembly
- 90 Threaded side outlet (2", 3", 4") (cast iron only)
- 90NH No hub side outlet (2", 3", 4") (cast iron only)
- 95 Client logo
- BA Buy American Act compliant product
- C Membrane clamp for low rough-in (min. 1/2" (13))

SUFFIX OPTIONAL VARIATIONS

- C2 High rough-in membrane clamp (min. 1 9/16" (40))
- F4 4" Round funnel
- F6 6" Round funnel
- G Oval 4" x 9" funnel
- J 6" x 3" x 1" funnel
- (Standard) No hub outlet
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4")
- X Inside caulk outlet
- Z Extended wide elastomeric flange

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contract: _____
Purchase Order No: _____