

Location: _____




F1120

FLOOR DRAIN WITH INTEGRAL DEEP SEAL TRAP

Specification: MIFAB Series F1120 lacquered cast iron floor drain with anchor flange, integral deep seal trap, and standard reinforced (specify diameter), (specify material finish) strainer. (For membrane floors, use MIFAB F1120-C Series.)

Function: Used in showers, kitchens, restrooms and other non-membrane finished areas where side outlet body with integral deep seal trap is required. Round adjustable strainer is used for all types of poured finished floors.

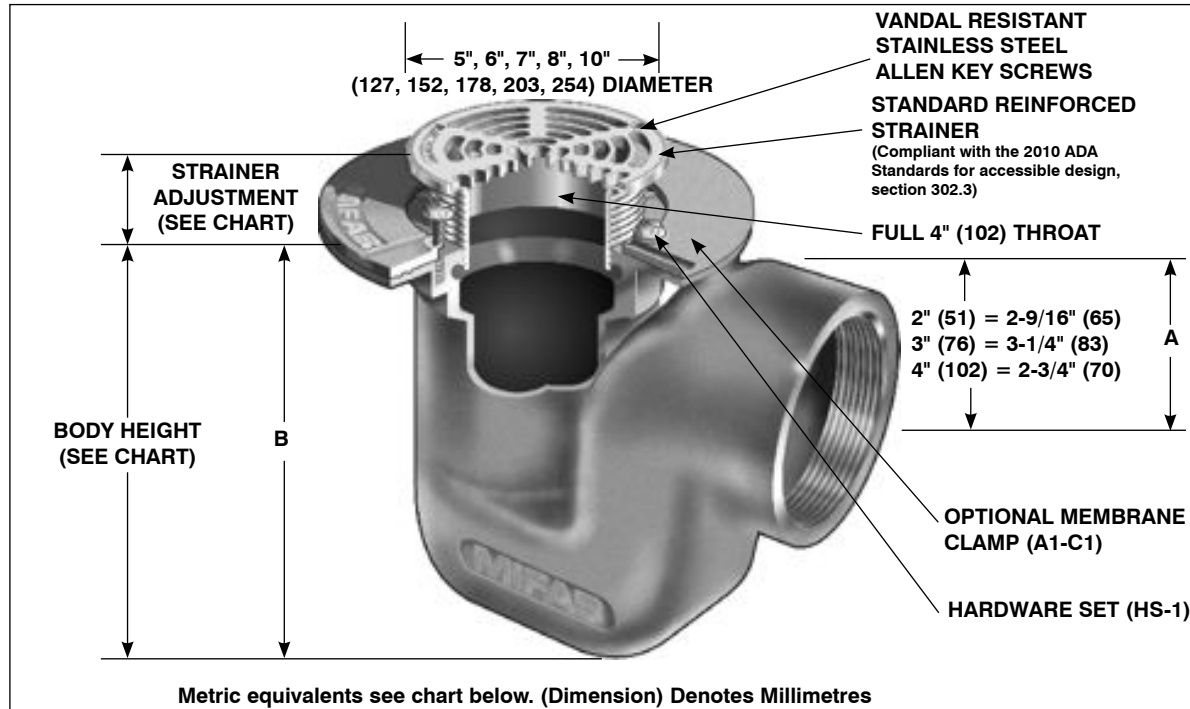

PARTS:



F1120(*)
(*) Denotes Outlet Size



(*)-(**)
(*) Denotes Strainer Diameter (5", 6", 7", 8" or 10")
(**) Denotes Strainer Finish (-1, -3 or -4)

F1120 Series meets
ANSI-ASME floor
drain standard
A112.6.3-2001

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING				PIPE SIZE	BODY HEIGHT	
			FREE AREA	LOAD RATING				A	B
	MIN	MAX		N.B. (-1)	S.S. (-3)	D.I. (-4)			
5" (127)	1/2" (13)	1 1/2" (38)	8 in ² (5200 ²)	UP TO 2,000 LBS.	5000-7499 LBS.	UP TO 7,499 LBS.	2" (51) 3" (76) 4" (102)	2 1/4" (57)	5 3/16" (132)
6" (152)	11/16" (17)	1 1/2" (38)	9 in ² (5800 ²)	UP TO 2,000 LBS.	5000-7499 LBS.	--		2 1/2" (67)	5 3/16" (132)
7" (178)	9/16" (14)	1 9/16" (40)	12 in ² (7700 ²)	UP TO 2,000 LBS.	5000-7499 LBS.	--		2 3/4" (70)	7 3/8" (187)
8" (203)	11/16" (17)	2 1/4" (57)	18 in ² (11600 ²)	UP TO 2,000 LBS.	5000-7499 LBS.	UP TO 10000 LBS.			
10" (254)	11/16" (17)	2 1/4" (57)	26 in ² (17170 ²)	--	5000-7499 LBS.	--			

SUFFIX OPTIONAL VARIATIONS

- 1 Nickel bronze strainer
- 3 Stainless steel strainer
- 4 Ductile iron grate (5" x 8" only)
- 5 Sediment bucket
- 6 Security screws (T-20 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 13 Galvanized body
- 15 Extension
- 16 Square top

SUFFIX OPTIONAL VARIATIONS

- 21 Secondary flat stainless steel strainer (2", 3", 4")
- 34 Closure plug
- 49 Chrome Plated Strainer
- 50 Lacquered cast iron funnel
- 95 Client logo
- ARRA ARRA (Stimulus Act) compliant product
- BA Buy American Act compliant product
- C Membrane clamp for low rough-in (min. 1/2" (13))

SUFFIX OPTIONAL VARIATIONS

- C2 High rough-in membrane clamp (min. 1 9/16" (40))
- F4 4" Round funnel
- F6 6" Round funnel
- G Oval 4" x 9" funnel
- HP Heel proof grate (1/4" maximum grate opening size, -3 only)
- J 6" x 3" x 1" funnel
- NH No hub side outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (standard)
- Z Extended wide elastomeric flange

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contract: _____
Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice or obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880