

Location: _____




MIFAB®

F1130C

FLOOR DRAIN WITH INTEGRAL DEEP SEAL TRAP AND CLEANOUT

Specification: MIFAB Series F1130C lacquered cast iron floor drain with anchor flange, cast iron membrane clamp ring with primary and secondary weepholes for waterproofing membrane, seepage collection sump, integral deep seal trap, and standard reinforced (specify diameter), (specify material finish) strainer, and standard reinforced 5" (127) diameter (specify material finish) top assembly floor cleanout with access cover, "O" ring Test Seal and plug with primary gasket seal.

Function: Used in kitchens, supermarkets and other membrane finished areas where side outlet body connection with integral deep seal trap and cleanout access is required. Round adjustable strainer and round floor cleanout top is used for all types of poured finished floors.

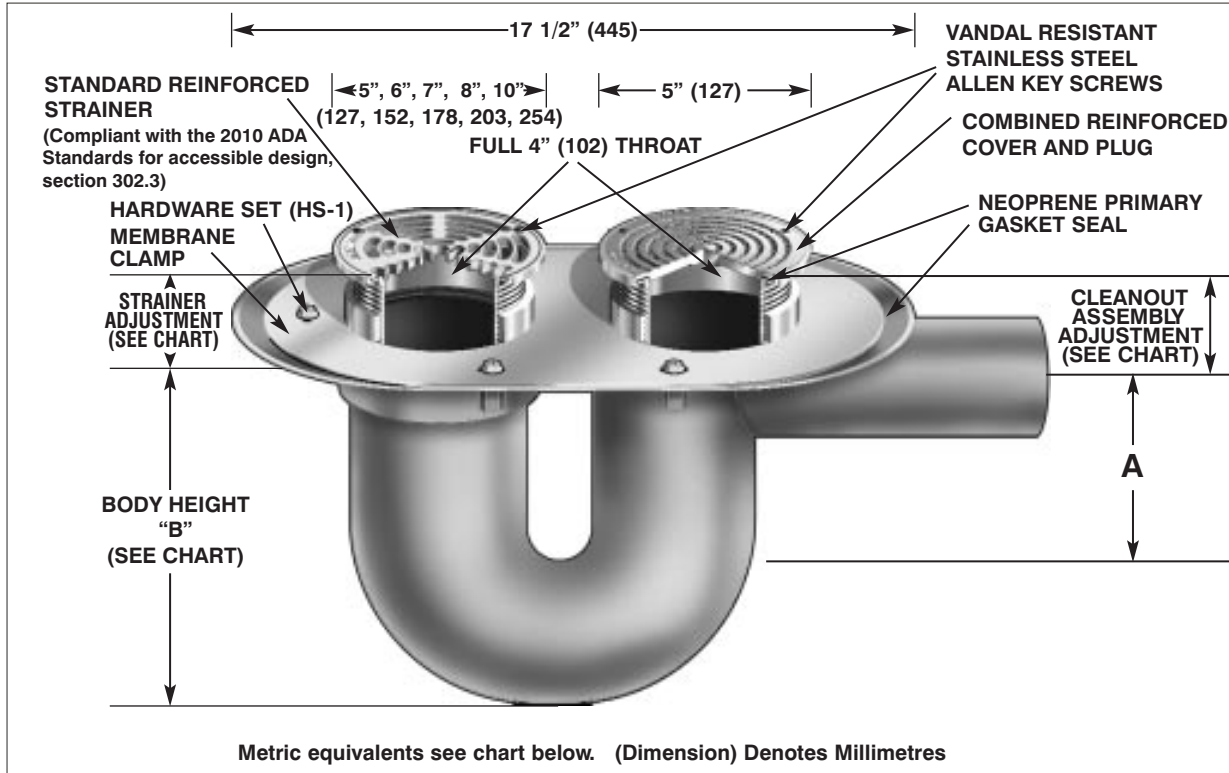

PARTS:



F113(*)C
(*) Denotes Outlet Size (2", 3" or 4")



(*)-(**)
(*) Denotes Strainer Diameter (5", 6", 7", 8", or 10")
(**) Denotes Strainer Finish (-1, -3 or -4)

F1130C Series meets
ANSI/ASME floor
drain standard
A112.6.3-2001

Metric equivalents see chart below. (Dimension) Denotes Millimetres

STRAINER DIAMETER	STRAINER ADJUSTMENT		FREE AREA	ANSI/ASME RATING			CLEANOUT ASSEMBLY SIZE	CLEANOUT ASSEMBLY ADJUSTMENT		LOAD RATING		BODY HEIGHT		
	MIN	MAX		N.B. (-1)	S.S. (-3)	D.I. (-4)		MIN	MAX	N.B. (-1)	S.S. (-3)	PIPE SIZE	A	B
5" (127)	1 5/8" (41)	2 5/8" (67)	8 in ² (5200 ²)	UP TO 2,000 LBS.	5000-7499 LBS.	UP TO 7,499 LBS.	5" (127)	1 5/8" (41)	2 5/8" (67)	UP TO 4,999 LBS.	5000-7499 LBS.	2" (51)	5 3/8" (137)	13 1/2" (343)
6" (152)	1 5/8" (41)	2 5/8" (67)	9 in ² (5800 ²)	UP TO 2,000 LBS.	5000-7499 LBS.	—						3" (76)	6" (152)	13 1/2" (343)
7" (178)	1 5/8" (41)	2 5/8" (67)	12 in ² (7700 ²)	UP TO 2,000 LBS.	5000-7499 LBS.	—						4" (102)	6 1/4" (159)	13 1/2" (343)
8" (203)	1 7/8" (48)	2 5/8" (67)	18 in ² (11600 ²)	UP TO 2,000 LBS.	5000-7499 LBS.	OVER 10,000 LBS.								
10" (254)	1 1/16" (17)	2 1/4" (57)	26 in ² (17170 ²)	—	5000-7499 LBS.	—								

SUFFIX OPTIONAL VARIATIONS:

- 1 Nickel bronze strainer
- 3 Stainless steel strainer and cover
- 4 Ductile iron (5", 8" grates only, 5" cleanout top only)
- 5 Sediment bucket
- 6 Security screws (T-20 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 13 Galvanized body

SUFFIX

- 15 Extension
- 16 Square top
- 34 Closure plug
- 49 Chrome Plated Strainer
- 50 Lacquered cast iron funnel
- 95 Client logo
- ARRA ARRA (Stimulus Act) compliant product
- BA Buy American Act compliant product

SUFFIX

- F4 4" Round funnel
- F6 6" Round funnel
- G Oval 4" x 9" funnel
- HP Heel proof grate (1/4" maximum grate opening size, -3 only)
- J 6" x 3" x 1" funnel
- PA Pennsylvania Steel Act compliant product
- Z Extended wide elastomeric flange

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contractor: _____
Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880